



AIR CONDITIONING



REFRIGERATION



HEATING



Mini Orange[®]

CONDENSATE REMOVAL PUMP

The world's best selling mini pump offers unrivalled reliability and performance.



12L/h max. flow

10m max. rec. head
(flow rate 6L/h)



21dB(A) @ 1m

KEY FEATURES



- Submersible secondary reservoir included
- Plug & play
- Anti siphon device

SUITABILITY

- Up to 16kW / 54,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Smaller commercial & domestic units

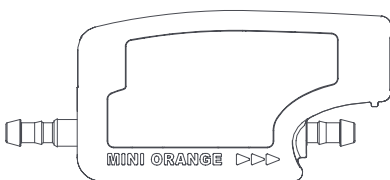0.25
kg†

51mm

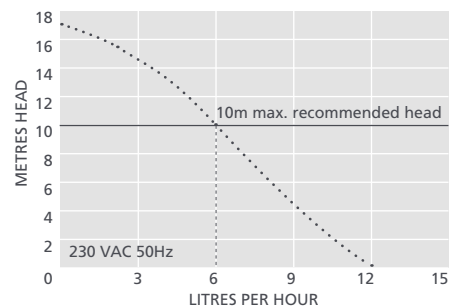

116mm ← → 39mm →

MINI ORANGE @ 230 VAC 50Hz

Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	21
Power supply	230 VAC, 0.11A, 16W, 50/60Hz
Rated	Non continuous
Class	II appliance ☐
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MINI ORANGE OPTIONS

Mini Orange (Europe)	FP2212
† Pump only	

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
4.3m Mini/Maxi orange extension kit	FP2940

IN THE BOX

Mini Orange pump • 1.5m Plug & play power cable • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

- Download manual at aspenpumps.com
View install video at aspenpumps.com



For more installation accessories take a look at our Aspen Xtra range

Information correct at time of going to press.



aspenpumps.com

+44 (0)1323 848842

sales@aspenpumps.com

reliable | silent | simple

15