3M[™] Electrical Products Scotchcast[™] Resin Cable Joint Kits



- Fast & simple installation to reduce labour costs
- User safety with innovative resin handling system
- High quality resins & components for unmatched reliability




ScotchcastTM Resin Cable Joint Kits

The new 3M[™] Scotchcast[™] Resin Cable Joint Kit range is designed to make the installation process faster, safer and more reliable than ever before. Now available is a range of hydrocarbon resistant products specially developed for the oil & gas industries, as well as dedicated products to suit armoured cable types commonly found in mining and industrial environments. Additionally, all ranges feature new sizes and configurations, now catering to both inline and branch jointing applications.

Features available in the new 3M[™] Scotchcast[™] Resin Cable Joint Kit range include:

- "Express" one-part mould body with innovative sealing system requiring no cutting to size or taping, allowing unmatched speed of installation (excludes LVI-3 series, which uses a hydrocarbon resistant two-part mould body).
- Closed Mix-Pour with integrated resin delivery system. Designed to eliminate almost any chance of skin contact, user safety is increased and wastage from spills is minimised.
- High quality 3M resin compounds which offer confidence through renowned reliability, and provide durability to avoid costly re-work and system down-time.

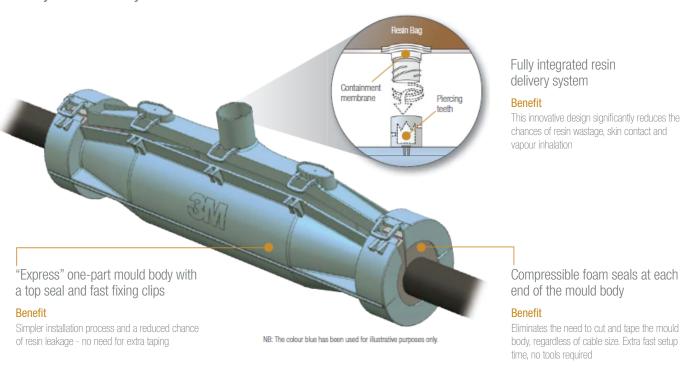

The 3MTM ScotchcastTM Closed Mix-Pour resin system allows mixing and pouring of the two-part resin without exposure to the user. Further, no tools or mixing containers are required.



Sealed, two part resin bag



Integrated delivery system. Included nozzle accessory used for LVI-3 series




Internal mixing is safe and clean



Resin is released and safely poured in one easy step

Product Selection Guide

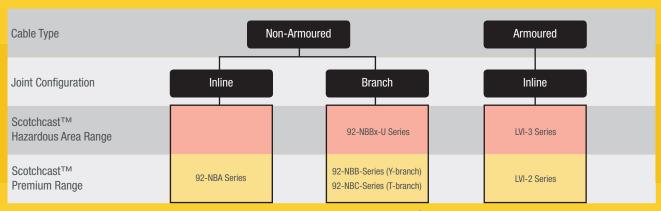

For customised kit options, including termite protection, please contact 3M.

3M Scotchcast™ Hazardous Area Resin Cable Joint Kit Range

3M™ Scotchcast™ Hazardous Area Resin Cable Joint Kits feature 3M™ Scotchcast™ Electrical Insulating Resin 1402FR. 1402FR resin is flame retardant, halogen free, and remains virtually unaffected by immersion in hydrocarbons and chemical solvents. When exposed to petrol, diesel and aggressive solvents, rapid deterioration can be experienced by standard encapsulating resins — especially those commonly found in conventional, low cost resin jointing kits. 1402FR resin is an ultra-high quality, highly modified resin that demonstrates superior performance compared to other encapsulating resin types. 3M™ Scotchcast™ Hazardous Area Resin Cable Joint Kits are recommended for industrial or specialist applications where hydrocarbons are present.

Product Number	Cable Type	Cable Size Rar Main	nge (OD, mm) Branch	Joint Configuration	Mould Body	3M Order Code
Scotchcast™ LVI-3/2	Armoured	14 - 30		Inline	Hydrocarbon two-part	KE235119523
Scotchcast™ LVI-3/3	Armoured	23 - 35		Inline	Hydrocarbon two-part	KE235119531
Scotchcast™ LVI-3/4	Armoured	28 - 47		Inline	Hydrocarbon two-part	KE235119549
Scotchcast™ LVI-3/5	Armoured	35 - 60		Inline	Hydrocarbon two-part	KE235119556
Scotchcast™ LVI-3/6	Armoured	45 - 70		Inline	Hydrocarbon two-part	KE235119564
Scotchcast™ LVI-3/7	Armoured	45 - 90		Inline	Hydrocarbon two-part	KE235119572
Scotchcast™ LVI-3/8	Armoured	45 - 100		Inline	Hydrocarbon two-part	KE235120810
Scotchcast™ LVI-3/2-IC	Instrumentation / Control, Armoured	14 - 30		Inline	Hydrocarbon two-part	KE235119580
Scotchcast™ LVI-3/3-IC	Instrumentation / Control, Armoured	23 - 35		Inline	Hydrocarbon two-part	KE235119598
Scotchcast™ LVI-3/4-IC	Instrumentation / Control, Armoured	28 - 47		Inline	Hydrocarbon two-part	KE235119606
Scotchcast™ LVI-3/5-IC	Instrumentation / Control, Armoured	35 - 60		Inline	Hydrocarbon two-part	KE235119614
Scotchcast™ LVI-3/6-IC	Instrumentation / Control, Armoured	45 - 70		Inline	Hydrocarbon two-part	KE235119622
Scotchcast™ 92-NBB1-U	Non-armoured	11 - 23	11 - 23	Branch (Y config)	Express one-part	KE235109110
Scotchcast™ 92-NBB2-U	Non-armoured	16 - 33	16 - 33	Branch (Y config)	Express one-part	KE235109128



3M™ Scotchcast™ Premium Resin Cable Joint Kit Range

3M™ Scotchcast™ Premium Resin Cable Joint Kits feature Scotchcast™ Electrical Insulating Resin 40, which is a high quality two part compound designed for general purpose electrical insulation, moisture sealing and mechanical protection. All products in this range utilise the "Express" one-part mould body, providing time and cost savings through extra-fast setup.

Product Number	Cable Type	Cable Size Ra Main	ange (OD, mm) Branch	Joint Configuration	Mould Body	3M Order Code
Scotchcast™ 92-NBA0	Non-armoured	6 - 16		Inline	Express one-part	KE235117568
Scotchcast™ 92-NBA1	Non-armoured	10 - 22		Inline	Express one-part	KE235117576
Scotchcast™ 92-NBA2	Non-armoured	12 - 25		Inline	Express one-part	KE235117584
Scotchcast™ 92-NBA3	Non-armoured	13 - 32		Inline	Express one-part	KE235117592
Scotchcast™ 92-NBA4	Non-armoured	18 - 36		Inline	Express one-part	KE235117600
Scotchcast™ 92-NBA5	Non-armoured	19 - 45		Inline	Express one-part	KE235117618
Scotchcast™ 92-NBA6	Non-armoured	27 - 54		Inline	Express one-part	KE235117626
Scotchcast™ 92-NBA7	Non-armoured	29 - 64		Inline	Express one-part	KE235117634
Scotchcast™ 92-NBB0	Non-armoured	8 - 19	8 - 19	Branch (Y Config)	Express one-part	KE235119358
Scotchcast™ 92-NBB1	Non-armoured	11 - 25	11 - 25	Branch (Y Config)	Express one-part	KE235119366
Scotchcast™ 92-NBB2	Non-armoured	16 - 35	16 - 35	Branch (Y Config)	Express one-part	KE235119374
Scotchcast™ 92-NBC2	Non-armoured	16 - 35	16 - 35	Branch (T Config)	Express one-part	KE235119408
Scotchcast™ LVI-2/2	Armoured	12 - 25		Inline	Express one-part	KE235112288
Scotchcast™ LVI-2/3	Armoured	13 - 32		Inline	Express one-part	KE235112296
Scotchcast™ LVI-2/4	Armoured	18 - 36		Inline	Express one-part	KE235112320
Scotchcast™ LVI-2/5	Armoured	19 - 45		Inline	Express one-part	KE235112338
Scotchcast™ LVI-2/6	Armoured	27 - 54		Inline	Express one-part	KE235112346
Scotchcast™ LVI-2/7	Armoured	29 - 64		Inline	Express one-part	KE235112353

The 3M[™] Scotchcast[™] "Express" one-part mould body is now available in inline, T-branch and Y-branch (pictured) configurations.





3M Australia & New Zealand

Electrical Markets Division

Building A, 1 Rivett Rd North Ryde NSW 2113 Australia Phone: 136 136 3MsafetyAUCS@mmm.com 94 Apollo Dr Albany, Auckland New Zealand Phone: 0800 474 787 3MNZITB@mmm.com

www.3M.com.au

www.3M.co.nz

 $3M^{\mbox{\tiny TM}}$ and Scotchcast $^{\mbox{\tiny TM}}$ are trademarks of 3M Company.

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability.

3M's product warranty is stated in its Product Literature available upon request. 3M MARKS NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether, indirect, special, incident or consequential regardless of the legal theory asserted.

Product Source/Origin: The 3M supply location does not necessarily represent the County of Origin for the product. If you require 3M product Country of Origin information, contact your local 3M Customer Service Representative for assistance.

3M is a trademark of the 3M Company. © 3M 2013 All Rights Reserved. Please recycle.

