

Features


- Glass touch surface.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Combination head screws with a 6mm bore to suit 4 x 2.5mm² cable (screws backed out for easier installation of cabling).
- Silverfish antenna technology.
- Bluetooth mesh connectivity with each device acting as a repeater.
- 2 year warranty.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Auto off timer (double press to ignore).
- Power outage recovery.
- Power lock.
- Individual socket control.
- Night light on/off and auto dim.
- High energy use alert.
- Voice control with your favourite voice assistant (requires Internet and Zimi Cloud Connect) *

Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Max Load Rating	Line Voltage Freq.
SENPP	White	Senoa Power Point Switched 2 Gang	10A @ 250V~ 2500W	50Hz Nominal
SENPPBK	Black			

Dimensions

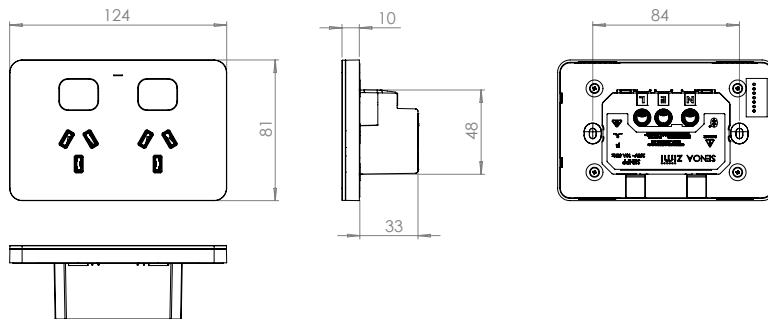

Dimensions in mm

Cleaning Guidelines

Ensure that switches are turned off before cleaning. Only clean the surfaces with a damp or dry cloth.

DO NOT

- ✗ spray anything directly on to electrical switches or power point sockets
- ✗ use cleaning sprays or harsh chemical cleaners
- ✗ use an abrasive cloth
- ✗ wash the cover plates in hot water.



SENPP



SENPPBK

Standards Approval:

AS/NZS 3112 & AS/NZS CISPR15

Certification Number:

GMA-511359-EA



Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Ripple Smooth™ technology.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Trailing edge dimmer.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Lighting and dimming control.
Press for on/off
Hold for dimming
Double press for full brightness
Triple press for a timed fade to off.
- Auto off timer.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Min and max dimming levels for increased dimming compatibility without flicker.
- Voice control with your favourite voice assistant.
(requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life.

Specifications

Product Code	Colour	Description	Rating
SENMD52	White	Senoa Multi Dimmer Switch 2 Button	230V~ 50Hz
SENMD52BK	Black		

Load Type per channel	Symbol	Dimmer rated load	Switch rated load
LED drivers & lamps		250W	230W
Incandescent		100W	5A
Fluorescent		×	2AX
Electronic transformers		×	2A
Standard iron core & toroidal transformers		×	2A
Small motors		×	M.20

Dimensions

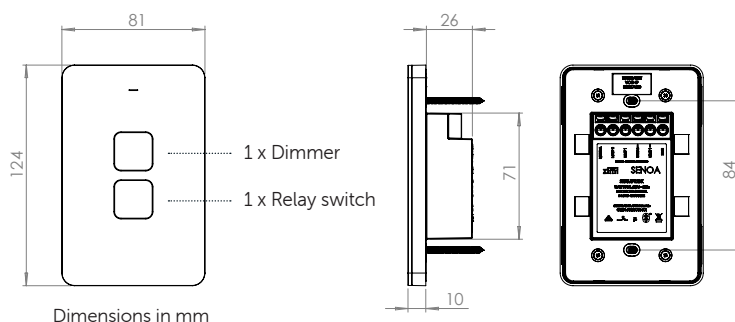

Cleaning Guidelines

Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT

- × spray anything directly on to electrical switches or power point sockets
- × use cleaning sprays or harsh chemical cleaners
- × use an abrasive cloth
- × wash the cover plates in hot water.



SENMD52



SENMD52BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511367-EA




Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Ripple Smooth™ technology.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Trailing edge dimmer.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Lighting and dimming control.
Press for on/off
Hold for dimming
Double press for full brightness
Triple press for a timed fade to off.
- Auto off timer.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Min and max dimming levels for increased dimming compatibility without flicker.
- Voice control with your favourite voice assistant.
(requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life.

Specifications

Product Code	Colour	Description	Rating
SENMD54	White	Senoa Multi Dimmer Switch 4 Button	230V~ 50Hz' Max 10A Total
SENMD54BK	Black		

Load Type per channel	Symbol	Dimmer rated load	Switch rated load
LED drivers & lamps		250W	230W
Incandescent		100W	5A
Fluorescent		×	2AX
Electronic transformers		×	2A
Standard iron core & toroidal transformers		×	2A
Small motors		×	M.20

Dimensions

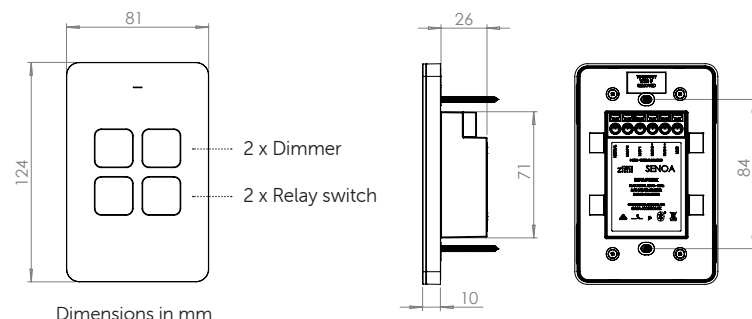

Cleaning Guidelines
Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT
x spray anything directly on to electrical switches or power point sockets
x use cleaning sprays or harsh chemical cleaners
x use an abrasive cloth
x wash the cover plates in hot water.



SENMD54



SENMD54BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511367-EA



Download Zimi
Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Ripple Smooth™ technology.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Trailing edge dimmer.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Lighting and dimming control.
Press for on/off
Hold for dimming
Double press for full brightness
Triple press for a timed fade to off.
- Auto off timer.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Min and max dimming levels for increased dimming compatibility without flicker.
- Voice control with your favourite voice assistant.
(requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life.

Specifications

Product Code	Colour	Description	Rating
SENMD56	White	Senoa Multi Dimmer Switch 6 Button	230V~ 50Hz Max 10A Total
SENMD56BK	Black		

Load Type per channel	Symbol	Dimmer rated load	Switch rated load	Spare Buttons
LED drivers & lamps		250W	230W	Behaviour Link
Incandescent		100W	5A	
Fluorescent		×	2AX	
Electronic transformers		×	2A	
Standard iron core & toroidal transformers		×	2A	
Small motors		×	M.20	

Dimensions

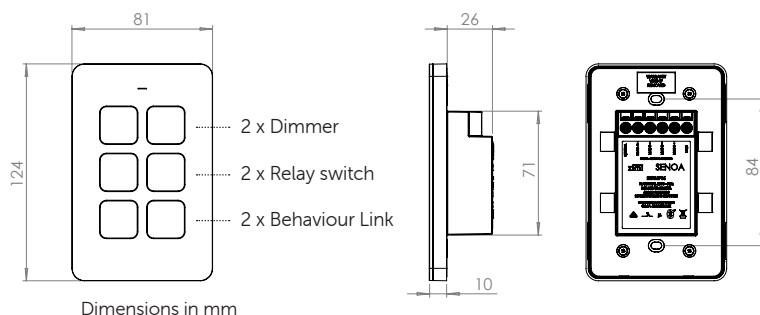

Cleaning Guidelines


Ensure that switches are turned off before cleaning. Only clean the surfaces with a damp or dry cloth.

DO NOT

- × spray anything directly on to electrical switches or power point sockets
- × use cleaning sprays or harsh chemical cleaners
- × use an abrasive cloth
- × wash the cover plates in hot water.



SENMD56



SENMD56BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511367-EA



Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Auto off timer (double press to ignore).
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant. (requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Rating
SENMPS2	White	Senoa Multi Purpose Switch 2 Button	230V~ 50Hz Max 10A Total
SENMPS2BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps		230W
Incandescent		5A
Fluorescent		2AX
Electronic transformers		2A
Standard iron core & toroidal transformers		2A
Small motors		M.20

Dimensions

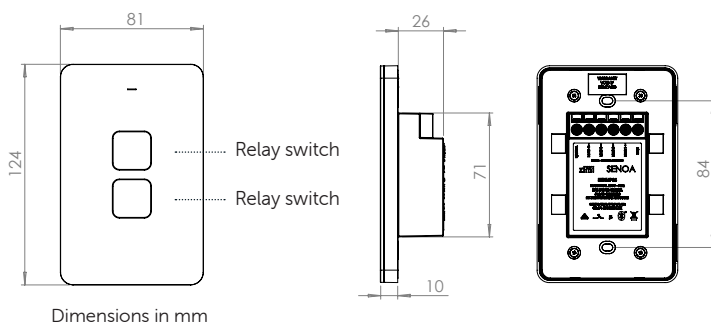

Dimensions in mm

Cleaning Guidelines

Ensure that switches are turned off before cleaning. Only clean the surfaces with a damp or dry cloth.

DO NOT

- x spray anything directly on to electrical switches or power point sockets
- x use cleaning sprays or harsh chemical cleaners
- x use an abrasive cloth
- x wash the cover plates in hot water.



SENMPS2



SENMPS2BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511368-EA




Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Auto off timer (double press to ignore).
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant. (requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Rating
SENMPS4	White	Senoa Multi Purpose Switch 4 Button	230V~ 50Hz Max 10A Total
SENMPS4BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps		230W
Incandescent		5A
Fluorescent		2AX
Electronic transformers		2A
Standard iron core & toroidal transformers		2A
Small motors		M.20

Dimensions

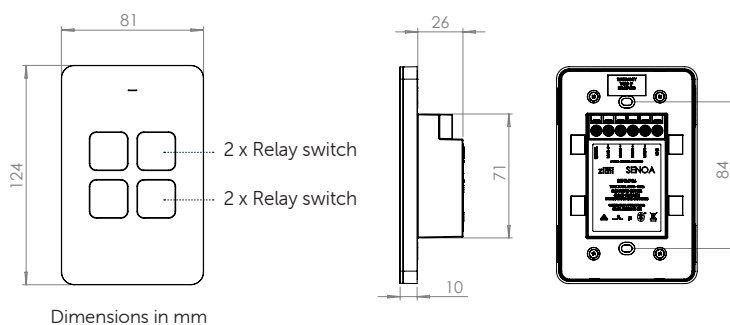

Cleaning Guidelines


Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT

- x spray anything directly on to electrical switches or power point sockets
- x use cleaning sprays or harsh chemical cleaners
- x use an abrasive cloth
- x wash the cover plates in hot water.



SENMPS4



SENMPS4BK

Standards Approval:

AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:

GMA-511368-EA




Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Glass touch surface.
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy use in watts & dollars.
- Automatic schedules inbuilt.
- Auto off timer (double press to ignore).
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of Senoa and other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant. (requires Internet and Zimi Cloud Connect) *



Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Rating
SENMPS6	White	Senoa Multi Purpose Switch 6 Button	230V~ 50Hz Max 10A Total
SENMPS6BK	Black		

Load Type per channel	Symbol	Switch rated load	Spare Buttons
LED drivers & lamps		230W	Behaviour Link
Incandescent		5A	
Fluorescent		2AX	
Electronic transformers		2A	
Standard iron core & toroidal transformers		2A	
Small motors		M.20	

Dimensions

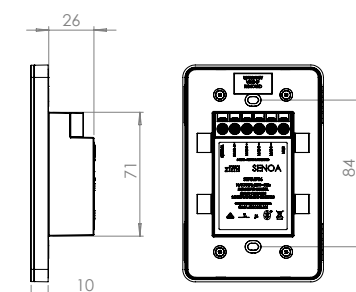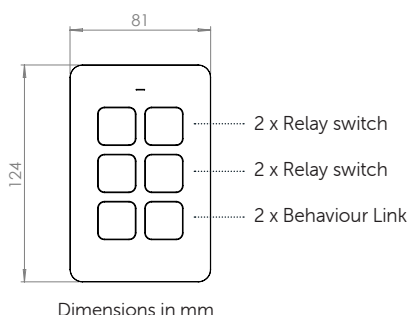

Cleaning Guidelines
Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT
x spray anything directly on to electrical switches or power point sockets
x use cleaning sprays or harsh chemical cleaners
x use an abrasive cloth
x wash the cover plates in hot water.



SENMPS6



SENMPS6BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511368-EA




Download Zimi
Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



Features

- Suits most AC blinds with separate active wires for open/close (refer compatibility list).
- Glass touch surface.
- Open and close button (touch to stop).
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- 2 year warranty.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- Automatic schedules inbuilt.
- Night light on/off and auto dim.
- Voice control with your favourite voice assistant. (requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Rating
SENBC2	White	Senoa Single Blind Controller	230V~ 50Hz
SENBC2BK	Black		

Load Type per channel	Symbol	Blind 1
Small Motors M.20	(M)	300W

Dimensions

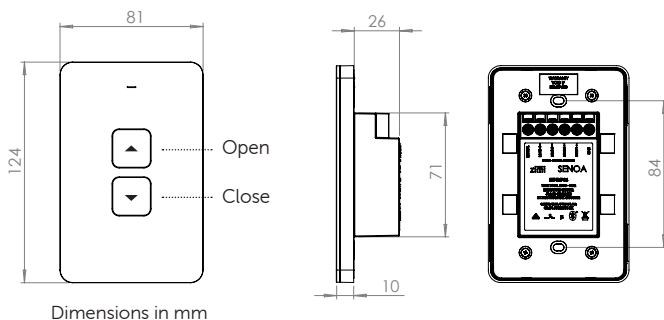

Cleaning Guidelines

Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT

- x spray anything directly on to electrical switches or power point sockets
- x use cleaning sprays or harsh chemical cleaners
- x use an abrasive cloth
- x wash the cover plates in hot water.

SENBC2

SENBC2BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511368-EA




Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?
<https://support.zimi.life>

Features

- Suits most AC blinds with separate active wires for open/close (refer compatibility list).
- Glass touch surface.
- Open and close button (touch to stop).
- Proximity sense illumination.
- Colour tuneable surfaces (RGBW).
- Slim magnetic fascia.
- Laser engraving option for icon buttons.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- 2 year warranty.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- Automatic schedules inbuilt.
- Power outage recovery.
- Night light on/off and auto dim.
- Voice control with your favourite voice assistant. (requires Internet and Zimi Cloud Connect) *


Plus more features with the latest software version.
Visit www.zimi.life

Specifications

Product Code	Colour	Description	Rating
SENBC4	White	Senoa Dual Blind Controller	230V~ 50Hz
SENBC4BK	Black		

Load Type per channel	Symbol	Blind 1	Blind 2
Small Motors M.20	(M)	300W	300W

Dimensions

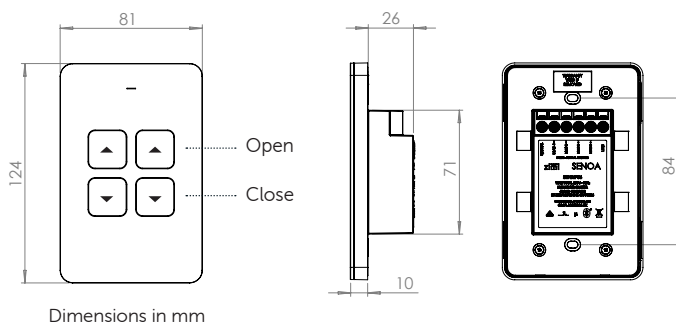

Cleaning Guidelines

Ensure that switches are turned off before cleaning.
Only clean the surfaces with a damp or dry cloth.

DO NOT

- spray anything directly on to electrical switches or power point sockets
- use cleaning sprays or harsh chemical cleaners
- use an abrasive cloth
- wash the cover plates in hot water.

SENBC4

SENBC4BK

Standards Approval:

AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:

GMA-511368-EA




Download Zimi

Scan the code with your phone camera to download.



* Zimi Cloud Connect

Control all your Zimi devices anywhere in the world via your Wi-Fi Internet.



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?
<https://support.zimi.life>