


SENPP2G

SENPP2GBK



Senoa Simple Double Power Point

- Socket outlets approved to AS/NZ 3112
- Wall plate 10mm thick to align with other Senoa products in the range.
- Glass look fascia to compliment Senoa range.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals with screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable wire.
- Combination head screws for the socket terminals.
- Uses integral ‘Cat Flap’ screw covers for mounting screws.
- Green dolly indicator colour
- Covers plates are made from UV resistant polycarbonate
- Standard colour is White. Also available in Black.
When ordering BLACK product add "BK" at end of catalogue number, ie SENPP2GBK
- Typical example of size seen below:

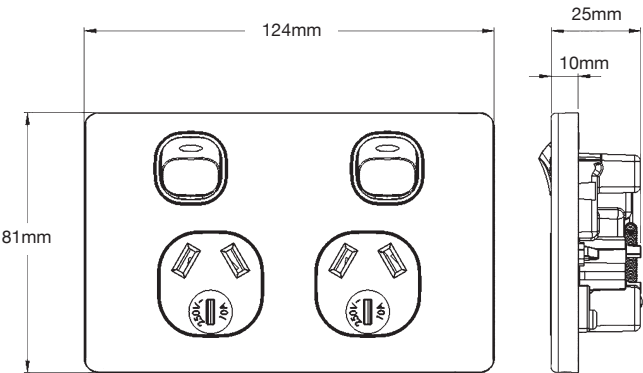

Catalogue Number	Description
SENPP2G	Power Point Switched 2 Gang 10A 250V~ White
SENPP2GBK	Power Point Switched 2 Gang 10A 250V~ Black

When ordering BLACK product add "BK" at end of catalogue number, ie SENPP2GBK

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic). Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.

Certification Number:

TBC

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au




SENPP2USBAU

SENPP2USBAUBK



Senoa Simple Power Point Auto Switched with Dual USB Charger (Type A & C)

- Product is approved in accordance with AS/NZS3112.
- Sockets rated to 10A 250V~
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- USB outlets rated to 3.4A max total at 5V.
- Glass look fascia to compliment Senoa range.
- Auto-Switched socket outlet switches active upon plug insertion/withdrawal.
- Sockets contains shutters activated from the neutral pin.
- Wall plate 10mm thick to align with other Senoa products in the range.
- Warm white LED indicators to show "power on" status.
- Fits standard mounting accessories with 84mm centres.
- Terminals suit 3 x 2.5mm² cable wire.
- The USB circuit is integrated and connected internally with the socket outlet so one set of terminals need wiring connection.
- Recommended for phone use or small tablets only, larger devices such as laptops with USB C connections may require outlets with greater output.
- Covers plates are made from UV resistant polycarbonate
- Standard colour is White. Also available in Black.
When ordering **BLACK** product add "BK" at end of catalogue number, ie **SENPP2USBAUBK**
- Typical example of size seen below:

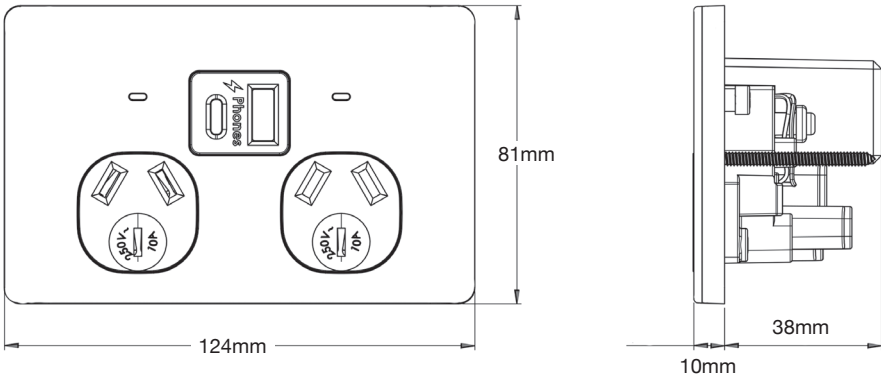

Catalogue Number	Description
SENPP2USBAU	Power Point, Fully Integrated Dual USB Charger (Type A & C) Auto Switched White
SENPP2USBAUBK	Power Point, Fully Integrated Dual USB Charger (Type A & C) Auto Switched Black

When ordering **BLACK** product add "BK" at end of catalogue number, ie **SENPP2GBK**

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic). Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.

Certification Number:

TBC

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au

SENSWPV1G

SENSWPV1GBK

SENSWPV2G

SENSWPV2GBK

SENSWPV3G


SENSWPV3GBK

SENSWPV4G

SENSWPV4GBK



Images above show Senoa Simple plates using rocker mechs

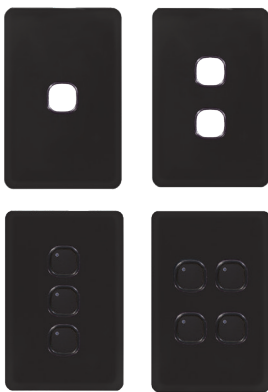

Images above show Senoa Simple plates using push button mechs


Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic). Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.

Senoa Simple Switch Plates

- Switch plates only (less mechs)
- Plates can be fitted with Trader Meerkat MESWC 'cats eye' mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories (see below to find product codes of Trader compatible mechs).
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses integral 'Cat Flap' screw covers for mounting screws
- Covers plates are made from UV resistant polycarbonate
- Standard colour is White. Also available in Black.
When ordering BLACK product add "BK" at end of catalogue number, ie SENSWPV1GBK
- Typical example of size in diagram:

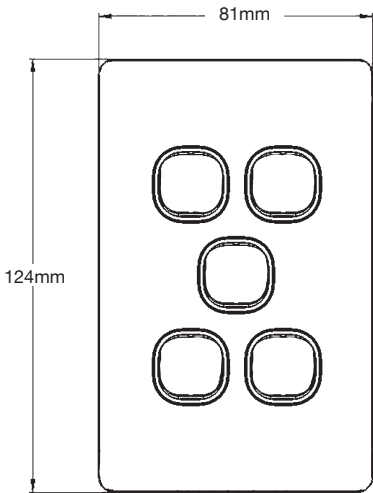

Can be used with traditional rocker switch mechanisms or push button mechanisms

Catalogue Number	Description
SENSWPV1G	Switch Plate 1 Gang (Less Mech) White
SENSWPV2G	Switch Plate 2 Gang (Less Mech) White
SENSWPV3G	Switch Plate 3 Gang (Less Mech) White
SENSWPV4G	Switch Plate 4 Gang (Less Mech) White

When ordering BLACK product add "BK" at end of catalogue number, ie [SENPP2GBK](#)

MEERKAT

Meerkat Switch Mechanisms are recommended for rocker switch options in all switch plates

See Meerkat Technical Data Sheets or visit gsme.com.au to view product range and/or download information.

Meerkat Push Buttons recommended for use in switch plates:

- MEPB

MEPBW
- [Push Button, Electronic On/Off Switch, 3-wire]

[Push Button, Multi-Way Remote Dimming and On/Off]

Dimpala Push Button Digital Dimmer recommended for use in switch plates:

- DIMPBD

[Dimpala Push Button Digital Dimmer, Trailing Edge]

Certification Number:

TBC

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au