

XLPE / UV PVC TRAFFIC CABLE




AUSTRALIA PACIFIC ELECTRIC CABLES

VFM - V90 PVC Sheathed,
Two core Flat, no earth,
450/750V AS/NZS 5000.2
Main Roads specifications MRTS256 power cables

Conductor: Copper
Insulation: XLPE
Sheath: PVC 5V90

XLPE Insulated, UV/PVC Sheathed,
Two core Flat, no earth,
0.6/1KV AS/NZS 5000.1
Main Roads specifications MRS 11.95

Conductor: Copper
Insulation: XLPE
Sheath: PVC 5V90+Carbon

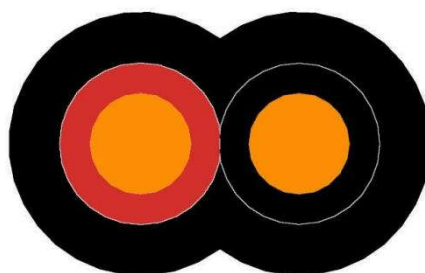

Compounds for continuous
conductor temperature of 90°C

Standard Colours

Cores: Red/Black

Sheath: Black

Conductor area mm ²	Number of Cores	Average Sheath thickness mm	Nominal overall diameter mm	Approx. mass kg/100m	Product Code
2.5	2	1	5.6 x 9.1	10.1	VFM205TBV90
4.0	2	1.1	6.5 x 10.8	14.8	VFM004TBV90
16.0	2	0.7	10.4 x 16.9	43.9	XFU016T
25.0	2	1.8	12.2 x 20.6	65.9	XFU025T