

Brass Enlarger for Hazardous Areas

- For indoor or outdoor use
- Increases enclosure mounting thread to suit fitting/gland
- Degree of protection against ingress of water IP66/68
- Compliance with IECEx CES 13.0022X
- Locknut is supplied as standard


Protection types: Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db, IP66/68

Standards: IEC/AS/NZS60079 (.0, .1, .7, .31), IEC/AS/NZS 60529

Material: Brass, Nickel Plated

Seal: Silicone

Temperature Range: -60°C/+130°C

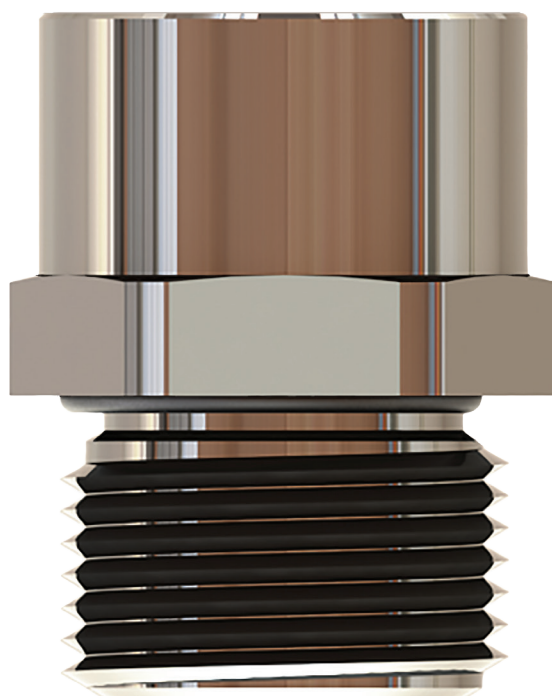

Cat. No.	Male Thread Diameter x Length	Female Thread Diameter x Length	Enlarger Diameter		Length	Int Diameter	Torque (NM)
			Across Flats	Across Points			
Metric Thread							
ALCBIMBZBM16M20	M16 x 15	M20 x 15	25	27.5	34	10.0	4
ALCBIMBZBM16M25	M16 x 15	M25 x 15	30	33	34	10.0	4
ALCBIMBZBM20M25	M20 x 15	M25 x 15	30	33	34	14.0	5.5
ALCBIMBZBM20M32	M20 x 15	M32 x 15	36	39.5	34	14.0	5.5
ALCBIMBZBM25M32	M25 x 15	M32 x 15	36	39.5	34	19.0	6
ALCBIMBZBM25M40	M25 x 15	M40 x 18	45	50	37	19.0	6
ALCBIMBZBM32M40	M32 x 15	M40 x 18	45	50	37	26.0	6
ALCBIMBZBM32M50	M32 x 15	M50 x 18	55	61	37	26.0	6
ALCBIMBZBM40M50	M40 x 18	M50 x 18	55	61	40	34.0	12
ALCBIMBZBM50M63	M50 x 18	M63 x 18	68	75	40.5	44.0	18
ALCBIMBZBM63M75	M63 x 18	M75 x 18	80	88.5	40.5	57.0	25
ALCBIMBZBM75M90	M75 x 18	M90 x 21	95	105	43.5	69.0	30
NPT Thread							
ALCBIMBZBN38M16	NPT 3/8" X 15	M16 x 15	22	24	33.5	12	-
ALCBIMBZBN12M20	NPT 1/2" X 15	M20 x 15	25	27.5	34	14.5	-
ALCBIMBZBN34M25	NPT 3/4" X 15	M25 x 15	30	33	34	7	-
# All dimensions in mm unless otherwise specified. Note: metric threads 1.5mm pitch, unless otherwise specified.							

All dimensions in mm unless otherwise specified. Note: metric threads 1.5mm pitch, unless otherwise specified.