


**NEW
PRODUCT**

Alco

Long Palm, Long Barrel Lugs

FEATURES:

- Non-insulated electro grade copper crimp lugs suitable for stranded to fine-stranded copper cable
- Made with a long barrel and a long palm
- No hole
- Electro tinned finish for corrosion resistance
- 99.9% copper for high conductivity
- Operating temperature: -55°C to $+155^{\circ}\text{C}$
- All sizes can be sold individually

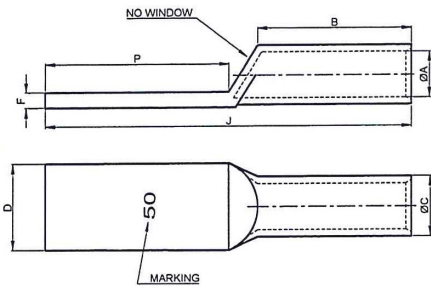

SPECIFICATIONS:

PART NUMBER	CONDUCTOR SIZE (mm ²)	DIMENSIONS (mm)							RECOMMENDED HEAT SHRINK		
		BARREL ID	BARREL OD	PALM WIDTH	PALM THICKNESS	BARREL LENGTH	TONGUE LENGTH	TOTAL LENGTH	THIN WALL	MED WALL	THICK WALL
		A	C	D	F	B	P	J			
ALCLLPB16	16	5.5	7.9	11	2.3	21	61	86	HSTNW13/6.5	HSMWGL16/5L	HSTKWGL13/4
ALCLLPB25	25	7.1	9.5	15	2.1	29	61	94	HSTNW13/6.5	HSMWGL16/5L	HSTKWGL19/6
ALCLLPB35	35	8.2	11.2	16	2.9	35	72	112	HSTNW18/9	HSMWGL25/8L	HSTKWGL19/6
ALCLLPB50	50	9.5	12.8	19	3.0	44	80	130	HSTNW18/9	HSMWGL25/8L	HSTKWGL19/6
ALCLLPB70	70	11.2	14.3	21	3.0	48	100	154	HSTNW22/11	HSMWGL25/8L	HSTKWGL19/6
ALCLLPB95	95	13.5	17.4	25	3.8	54	100	161	HSTNW22/11	HSMWGL25/8L	HSTKWGL28/9
ALCLLPB120	120	15.6	20.6	29	4.9	60	100	168	HSTNW40/20	HSMWGL35/12L	HSTKWGL28/9
ALCLLPB150	150	16.7	22.5	32	5.6	60	100	169	HSTNW40/20	HSMWGL35/12L	HSTKWGL38/12
ALCLLPB185	185	18.4	24.2	35	5.5	64	100	174	HSTNW40/20	HSMWGL35/12L	HSTKWGL38/12
ALCLLPB240	240	21.2	28.2	40	6.8	80	100	192	HSTNW40/20	HSMWGL50/16L	HSTKWGL38/12
ALCLLPB300	300	23.5	31.3	45	7.5	90	105	208	HSTNW40/20	HSMWGL50/16L	HSTKWGL51/16
ALCLLPB400	400	26.8	34.8	50	7.7	100	110	225	HSTNW50/25	HSMWGL50/16L	HSTKWGL51/16
ALCLLPB500	500	30.0	39.0	56	8.7	105	110	230	HSTNW50/25	HSMWGL50/16L	HSTKWGL68/22
ALCLLPB630	630	34.0	45	63	10.8	115	110	242	HSTNW50/25	HSMWGL50/16L	HSTKWGL68/22