




Non-insulated Ring & Fork Terminals

FEATURES:

- Non-insulated copper terminals suitable for stranded to fine-stranded cable
- Electro tinned finish for high conductivity
- Easy to connect

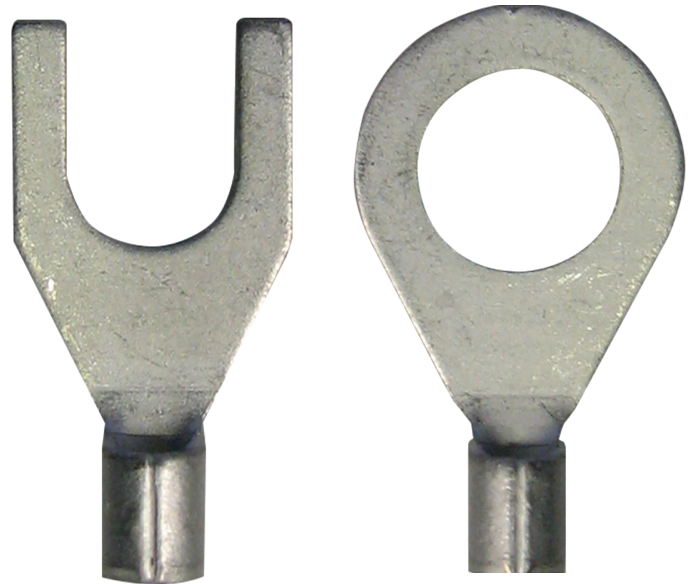

SPECIFICATIONS:

PART NUMBER	CONDUCTOR SIZE (0.5-1.5MM ²)	STUD SIZE (MM)	PACK QTY	PART NUMBER	CONDUCTOR SIZE (1.5-2.5MM ²)	STUD SIZE (MM)	PACK QTY	PART NUMBER	CONDUCTOR SIZE (4.0-6.0MM ²)	STUD SIZE (MM)	PACK QTY
RING TERMINALS				RING TERMINALS				RING TERMINALS			
ALCRRU3.7/100		3.7	100	ALCRBU3.7/100		3.7	100	ALCRYU4/100		4.0	100
ALCRRU4/100		4.0	100	ALCRBU4/100		4.0	100	ALCRYU5/100		5.0	100
ALCRRU5/100		5.0	100	ALCRBU5/100		5.0	100	ALCRYU6/100		6.0	100
ALCRRU6/100		6.0	100	ALCRBU6/100		6.0	100	ALCRYU8/100		8.0	100
ALCRRU8/100		8.0	100	ALCRBU8/100		8.0	100	ALCRYU10/50		10.0	50
ALCRRU10/100		10.0	100	ALCRBU10/100		10.0	100	ALCRYU12/50		12.0	50
FORK TERMINALS				FORK TERMINALS				FORK TERMINALS			
ALCFRU3.7/100		3.7	100	ALCFBU3.7/100		3.7	100				
ALCFRU4/100		4.0	100	ALCFBU4/100		4.0	100	ALCFYU4/100		4.0	100
ALCFRU5/100		5.0	100	ALCFBU5/100		5.0	100	ALCFYU5/100		5.0	100
ALCFRU6/100		6.0	100	ALCFBU6/100		6.0	100	ALCFYU6/100		6.0	100

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au