




Straight Nylon Fittings

Straight with male metric thread according to EN 60423 connector for fixing the ends of flexible corrugated conduits to the cable entries on control panels, terminal boxes on electric motors, etc. In accordance with standard EN 60204 (safety of Machinery). They are notable for their high tensile strength and tightness.

FEATURES:

- For terminating the ends of flexible corrugated conduits to the cable entries on control panels, terminal boxes, electric motors, etc., in electrical installations installed in accordance with standard AS/IEC 60204 (Safety of Machinery) and rolling stock.
- IP66 protection or IP68/IP69K protection with ORJ sealing ring and PLJ sealing washer
- Temperature range: -40°C to +105°C (150°C short term).
- Colour: black.
- Manufactured from high-quality polyamide (Nylon 6).
- Halogen, Phosphorus and Cadmium free.
- Heat shock resistant and flame resistant
- Self-extinguishing
- “Easy-click” quick assembly and removal, high tensile strength and watertight.
- Locknuts sold separately

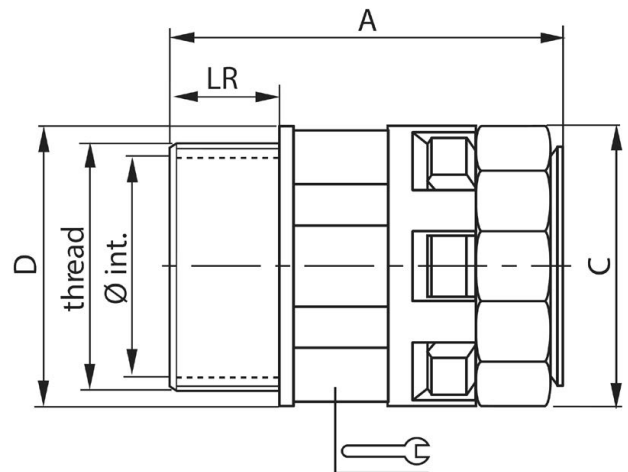

Part Number	Size (mm)	Internal dia (mm)	A (mm)	C (mm)	D (mm)	LR (mm)	Spanner (mm)	Pack Sizes
ALCMIR-12M16N	M16x1.5	10.0	37	26	25	11	20	100
ALCMIR-17M20N	M20x1.5	14.5	44	31	30	11	27	100
ALCMIR-23M25N	M25x1.5	18.5	48	37	37	12	34	50
ALCMIR-29M32N	M32x1.5	25.5	52	46	46	15	42	30
ALCMIR-36M40N	M40x1.5	32.0	60	54	54	19	50	20
ALCMIR-48M50N	M50x1.5	42.0	61	69	69	19	66	10