



Representative Photo Only
(actual product may vary based on configuration selections)

SensaGuard, Plastic Rectangular, 2 x PNP, 0.2A, max Safety Output, 3 m Cable

- Extensive range of different housing styles and mounting options
- RFID coded devices available
- Stainless steel versions available which are suitable for use in harsh environments
- Plastic or metal housing versions available

SPECIFICATIONS


InterlockType	Sensaguard
MTTFd (ISO 13849:2006)	385 years
Un, Nominal Operational Voltage, DC	24 V DC
Housing Type	Rectangular
Sensing Distance	18 mm
Output Type, Safety	DC PNP (Source), Dual Safety
Output Type, Auxiliary	DC PNP (Source) Aux
Connection / Termination	Built-in cable with flying leads
Length, Cable	3 m
Operating Temperature, Max	55 °C max
Operating Temperature, Min	-10 °C min
Storage Temperature, Max	55 °C max
Storage Temperature, Min	-10 °C min
IP Rating	IP69K
Shock Acceleration (Max.)	30 g
Shock Duration (Max.)	1 ms
Shock Rating	IEC 60068-2-27
Vibration Frequency, Operational (Max.)	55 Hz
Vibration Rating	IEC 61000-4-3

Catalogue No: **440N-Z21SS2A**
SENSAGUARD RECT BARREL/ACT 3M

Safety > Safety Interlocks > Non-Contact Interlocks > Allen-Bradley Non-Contact Interlocks > SensaGuard > Rectangular Housing



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	440N_Manufacturer Catalogue

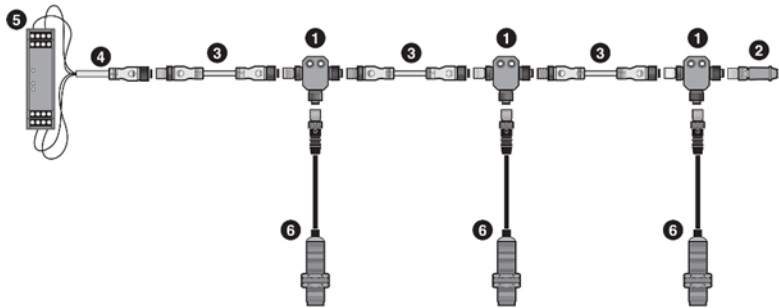

Connection / Wiring Diagram