

IN-LINE MIXED FLOW EXTRACTOR FANS

LINEO V0 Series

LONG LIFE




The Lineo mixed flow in-line fans have a very small overall size, making them ideal for installation in cramped areas.

Technical Data

Model	Code	Dia Ø	V	W min/max	FLA min/max	dBA@3m min/max	L/s min/max	m³/h min/max
LINEO100QV0	ALV17005	100	240	12/15	0.05/0.07	29.4/37.9	43.1/55.6	155/200
LINEO100V0	ALV17001	100	240	20/23	0.09/0.11	30.7/39.4	50/70.8	180/255
LINEO125V0	ALV17002	125	240	25/33	0.11/0.15	33.9/43	69.4/101.4	250/365
LINEO150V0	ALV17003	150	240	40/58	0.18/0.26	41.4/50.5	106.9/152.8	385/550
LINEO200QV0	ALV17007	200	240	45/75	0.22/0.37	39.6/49	194.4/263.9	700/950
LINEO200V0	ALV17006	200	240	98/145	0.43/0.64	46.2/52.5	219.4/294.4	790/1060
LINEO250QV0	ALV17027	250	240	85/110	0.40/0.50	49.1/56.2	200/275	720/990
LINEO250V0	ALV17009	250	240	110/180	0.48/0.78	51.4/59.1	275/375	990/1350
LINEO315V0	ALV17010	315	240	200/300	0.90/1.32	50.6/63.4	483.3/638.9	1740/2300

Dimensions

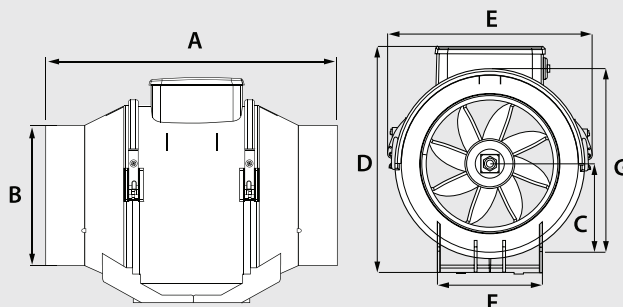

	A	B	C	D	E	F	G
LINEO100QV0	156	174	231	96	82	152	95
LINEO100V0	188.5	211	303	96	101.5	189	90
LINEO125V0	188.5	211	258	122	101.5	189	90
LINEO150V0	214.5	234	294	146	112.5	212	110
LINEO200QV0	234.5	260.5	300	196	125.5	235	140
LINEO200V0	234.5	260.5	300	196	125.5	235	140
LINEO250QV0	300	317	385	247	152.5	292	176.5
LINEO250V0	300	317	385	247	152.5	292	176.5
LINEO315V0	361.5	392.5	448	312	188.5	359	220.5

Features

- Two speeds
- Self extinguishing V0 plastic
- IP44 splash proof protection on all models
- Timer models are adjustable from 3 to 20 minutes
- Long Life ball bearing motors continuous, trouble free operation
- Quick and easy installation
- Simple maintenance
- Low sound emission
- Timer models available

Performance Curves

Please refer to the main catalogue