

Mains Voltage

TILT



SDC-TLT-WH



SDC-TLT-GD



SDC-TLT-SC



SDC-TLT-CR



SDC-TLT-BL



SDC-TLT

- 15° Tilt
- 99mm outside Ø
- No transformer required
- Bulb not exposed in cavity
- Quick and easy installation

HALOGEN

GU10-50-A

Included



- **10 lm/W** • 500 total lm • Dimmable
- 50Watts • 3,000K • CRI>100 • 36° Beam

LED

GU10-HPLED-WH




- **60 lm/W** • 300 total lm
- 5Watts • 4,000K • CRI>80 • 30° Beam

OPTIONAL LARGE FLANGE FOR SDC MODELS




SDC-LFL-WH




SDC-LFL-GD



SDC-LFL-SC




SDC-LFL-CR



SDC-LFL-BL

SDC-LFL

- For use in ceiling hole sizes 90mmØ to 140mmØ.
- Flange overall 163mmØ

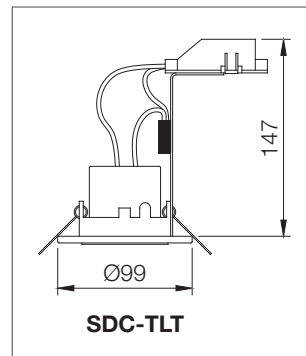

SURFACE MOUNT



SDHS-SC



SDHS-SC

- Satin Chrome
- 45mmH x 106mmØ
- Shown with 63Ø lamp
- Porch light, Ceiling light, Task light

HALOGEN

GU10-50-A



- **10 lm/W** • 500 total lm • Dimmable
- 50Watts • 3,000K • CRI>100 • 36° Beam

LED

GU10-HPLED-WH



- **60 lm/W** • 300 total lm
- 5Watts • 4,000K • CRI>80 • 30° Beam

HALOGEN

GU10-75-A



- **10 lm/W** • 750 total lm • Dimmable
- 75Watts • 3,000K • CRI>100 • 30° Beam

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F	Ø	CAVITY DEPTH	SIDE CLEARANCE
SDC-TLT	CA135	Closed	Side Abutted	Yes	80mm*	150mm	50mm
*SDC-LFL		Optional Flange			90mm - 140mm		