


## Technical Specification

### Diagram of Cable Construction

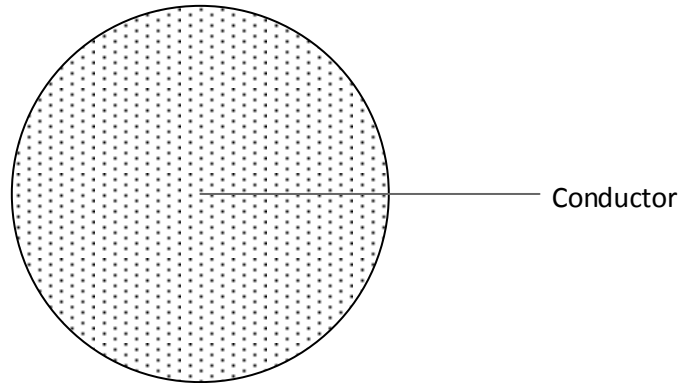

### Dimensions and Details

| Item                                              | Unit            |                                      |        |        |
|---------------------------------------------------|-----------------|--------------------------------------|--------|--------|
| <b>Product No.</b>                                |                 | 14000                                | 13050  | 12100  |
| <b>Type of cable</b>                              |                 | Fuse Wire                            |        |        |
| <b>Conductors:</b>                                |                 |                                      |        |        |
| Material                                          |                 | Tinned annealed copper wire, class 1 |        |        |
| No. of cores                                      |                 | 1                                    |        |        |
| Nominal cross section                             | mm <sup>2</sup> | 1.6                                  | 2.1    | 2.5    |
| Gauge size                                        | SWG             | 17                                   | 16     | 15     |
| Nominal stranding                                 | No./mm          | 1/1.42                               | 1/1.63 | 1/1.80 |
| <b>Approx. outer diameter</b>                     | mm              | 1.42                                 | 1.63   | 1.80   |
| <b>Weight</b>                                     | kg/km           | 14.1                                 | 19.6   | 22.6   |
| <b>Standards</b>                                  |                 | AS/NZS1125, RoHS                     |        |        |
| <b>Current rating of fuse</b>                     | A               | 63                                   | 80     | 100    |
| <b>Maximum DC resistance of conductor at 20°C</b> | Ω/km            | 11.6                                 | 8.76   | 7.19   |