
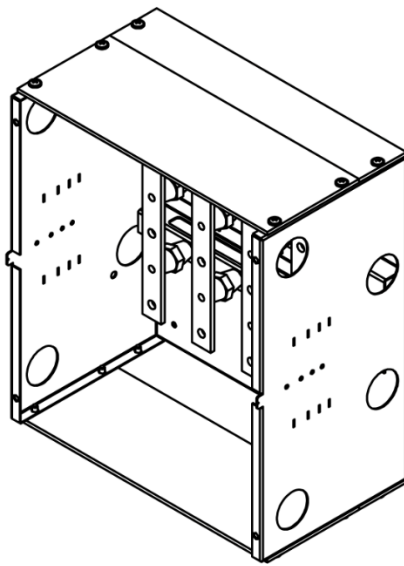


Product Datasheet

Link Boxes

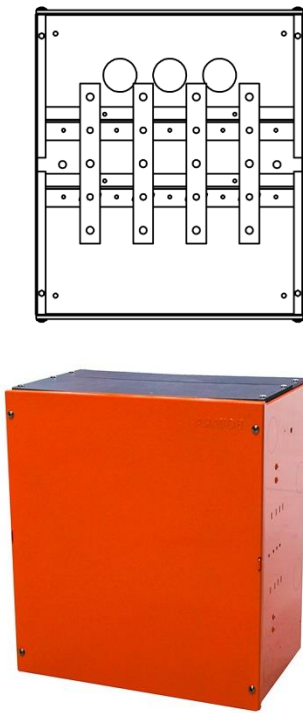

- IP20 (IP66 weatherproof enclosure available)
- 2mm galvanised mild steel body
- Wall mounted
- Top & bottom cable entry + rear and side laser-etched knockouts
- Lift off cover with seal provision
- Up to 630A, 17kA
- Includes x3 M10 bolts per bar
- 20mm x 6.6mm bars

Specifications

Category	Enclosures
IP Rating	IP20, IP66 Option available
Mounting	Wall Mounted
Cable Entry	Top and bottom (rear and side laser-etched knockouts)
Body / Housing / Coating	Annealed steel, Powdercoated X15 Orange LINK630IP56 Uses the ENCBP406030 powdercoated enclosure
Amperage	Up to 630A & 17kA
Bus Bars	20mm x 6.6mm, with phase barriers and indicators, includes x3 M10 bolts per bar
Gland Plates	Split 6mm Bakelite gland plates, top and bottom
Compliance	61439.1:2016

Product Datasheet

Link Boxes

Part No.	Description (Dimensions: H x W x D)
LINK630M	IP 20, 450 x 400 x 250mm
LINK630L	IP 20, 650 x 400 x 250mm
LINK630IP56	IP66, 600 x 400 x 325mm, 200mm usable depth, ENCBP406030 Enclosure