


Product Datasheet

TPB400.7.OUTLET



- IP44 Enclosure
- Fully wired and labelled
- Orange X15 powder coated
- Strong collapsible stand, battery tray, top lead suspension, insulated tie rod, bottom cable management bar included
- 12mm diameter padlockable hole
- Flat-packed for easy installation, transportation, and storage
- Door stay
- Phases: 3
- Double GPO 10 Amp: 3
- Single GPO 15 Amp: 1
- 5 Pin 32 Amp outlet: 1

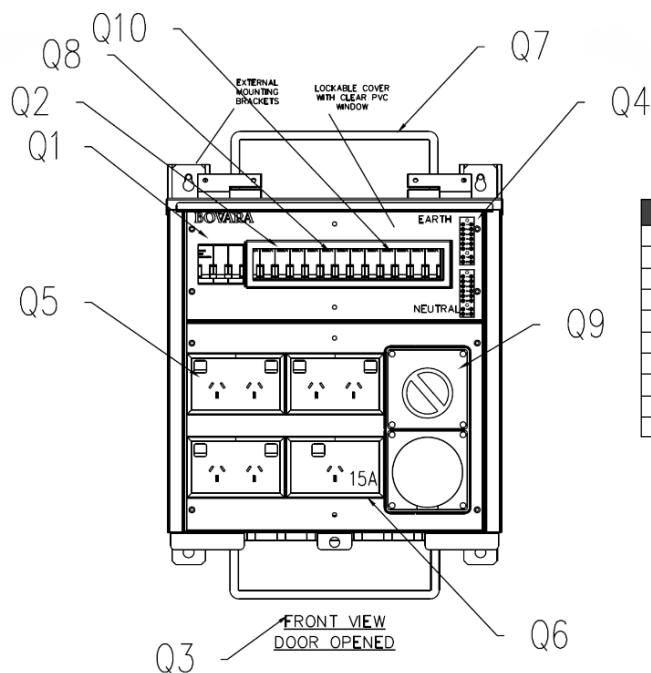

ID	QTY	Item Code	Description
Q01	1	BOVL3100	Main Switch 100A 3P 18mm
Q02	3	BOVR2.32C20	RCBO 20A 4.5kA 30mA 36mm Pitch 1P+N AC type
Q03	1	BTPB300.PLASTIC	TPB300 Bottom cable holder
Q04	2	GE7R	Neutral link 100A/7 Black
Q05	1	GPOB2	15A 250v Double pole, Double throw (DPDT)
Q06	3	GPOB4	10A 250v Double pole, Double throw (DPDT)
Q07	1	TTB300.PLASTIC	TPB300 Top cable holder
Q08	1	BOVM63C32	MCB 32A 6kA 3P C curve
Q09	1	56CV532	Switched socket outlets 5pin 500V 32A IP66
Q10	1	BOVRCD440	RCD 40A 4P 30mA Type A

Product Datasheet

TPB400.7.OUTLET

Specifications

Category	Onsite Power
SubCategory	Temporary Power Boards
Item Code	TPB400.7.OUTLET
IP Rating	IP44
Dimensions (H x W x D)	1760 x 400 x 250mm (including stand height)
Weight	~18kg
Nominal Operational Voltage, AC	415VAC
Poles (18mm), Total	16
Poles (18mm), Remaining	0
Cable Entry	Bottom
RCD Poles	1Ø 1P + N (switched) & 3Ø 4P (N switched)
Rated Frequency	50Hz
In, Rated Current	32A
I Δ n, Rated Leakage Current	30mA Type A
Inc, Rated Breaking Capacity	4.5kA
I Δ m, Rated Residual Breaking Capacity	100A
Wire / Conductor Size, Top, Max	35mm ² Tunnel Terminal
No. of 10A Socket Outlets	3 (Double GPO)
No. of 15A Socket Outlets	1 (Single GPO)
No. of 5 pin 32 Amp Socket Outlets	1
Compliance	AS/NZS 3000:2018 AS/NZS 61439 AS/NZS 61009 AS/NZS 3012