



IC-F
ABUTTED & COVERED

MOTION SERIES



LED Motion Sensor Downlights




PIR
SENSOR

Great design. Suitable for hallway, laundry room, living room, and any other indoor locations

- Input voltage: 240V AC 50/60Hz
- Wattage: 10W & 15W
- HL SMD2835 LED chips
- Power factor: ≥ 0.85
- Material: aluminium & PC
- Not suitable for 2-way switching
- PIR sensor type
- Max.detection diameter radius: 5m
- Time delay 90 seconds
- Detection range: 80°
- Block time: 0.2 seconds
- Not suitable for dimming
- Ambient temp: -20 to 45°C

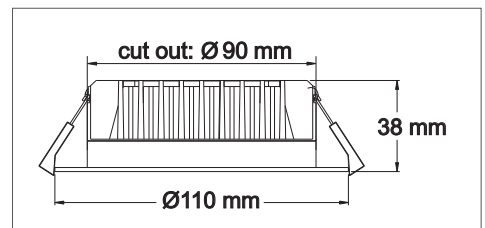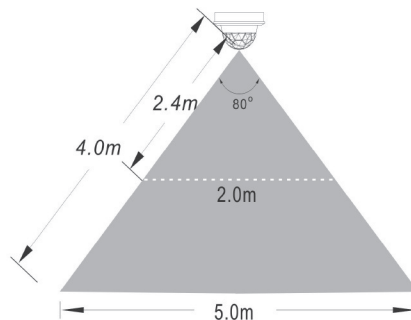

MOTION1,3 LINE DRAWINGS

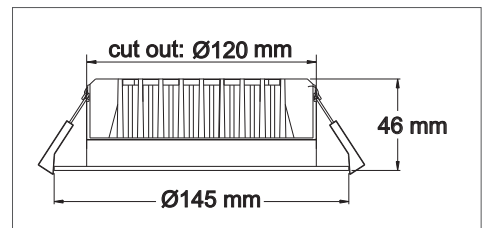

MOTION2,4 LINE DRAWINGS

30,000 HRS **BEAM 80°** **IP 20** **3YEAR WARRANTY**

CODE	DESCRIPTION	TECHNICAL DATA				DIMENSIONS			PACKAGING		
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	DIAM (mm)	CUT OUT (mm)	DEPTH (mm)	WEIGHT (Kg)	BOX (mm)	CARTON QTY
MOTION1	10W FIXED MOTION SENSOR D/L WH 3000K	3000	800	10	>80	Ø110	Ø90	38	0.43	130x130x85	1/36
MOTION2	15W FIXED MOTION SENSOR D/L WH 3000K	3000	1200	15	>80	Ø145	Ø120	46	0.70	165x165x90	1/16
MOTION3	10W FIXED MOTION SENSOR D/L WH 5000K	5000	850	10	>80	Ø110	Ø90	38	0.43	130x130x85	1/36
MOTION4	15W FIXED MOTION SENSOR D/L WH 5000K	5000	1250	15	>80	Ø145	Ø120	46	0.70	165x165x90	1/16

UPDATED ON 23.05.2017