


6MM-120MM BI-METAL REDUCING LINKS

For stranded sector and circular stranded aluminium to stranded copper cable.

The CABAC range of bi-metal crimp links are made to Australian dimensions and can be crimped with Australian standard tooling. They are friction welded from the highest quality aluminium (99.6% pure) and copper (99.9% pure). The barrels are coated with jointing compound, and the links are individually packed in plastic bags.

A full range of standard sizes are available however, virtually any link can be machined to order at short notice.

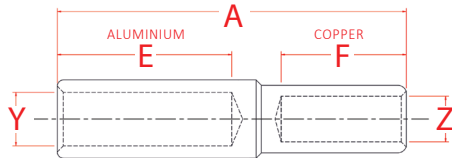

SPECIFICATIONS AND ORDERING INFORMATION

Part No.	Al/Cu Nominal Conductor (mm²)	Stranding No.	Al Stranding	A (mm)	E (mm)	F (mm)	Y (mm)	Z (mm)	Alum Crimp Die	Alum A/F Hex Die (mm²)	Al No. Crimps	Copper Crimp Die	Copper A/F Hex Die (mm²)	No. Crimps	Unit	Qty
BLK6/4	6/4	7/0.85	7/1.04	70	32	21	3.5	3	HT-6/35AL	9	1	K25	-	1	EA	1
BLK6/6	6/6	7/1.04	7/1.04	70	32	21	3.5	3.5	HT-6/35AL	9	1	K06	4.4	1	EA	1
BLK10/6	10/6	7/1.04	7/1.04	70	32	21	4.5	3.5	HT-6/35AL	9	1	K06	4.4	1	EA	1
BLK10/10	10/10	7/1.35	7/1.04	70	32	21	4.5	4.5	HT-6/35AL	9	1	K06	5.7	1	EA	1
BLK16/10	16/10	7/1.35	7/1.04	70	32	21	5.5	4.5	HT-6/35AL	9	1	K06	5.7	1	EA	1
BLK16/16	16/16	7/1.70	7/1.04	70	32	21	5.5	5.5	HT-6/35AL	9	1	HT130-C-16	6.3	1	EA	1
BLK25/6	25/6	7/1.04	19/1.35	70	32	21	7.5	3.5	HT-6/35AL	9	1	K06	4.4	1	EA	1
BLK25/10	25/10	7/1.35	19/1.35	70	32	21	7.5	4.5	HT-6/35AL	9	1	K06	5.7	1	EA	1
BLK25/16	25/16	7/1.70	19/1.35	70	32	21	7.5	5.5	HT-6/35AL	9	1	HT130-C-16	6.3	1	EA	1
BLK25/25	25/25	19/1.35	19/1.35	70	32	21	7.5	7.5	HT-6/35AL	9	1	HT130-C-25	7.7	1	EA	1
BLK35/10	35/10	7/1.35	19/1.53	70	32	21	8.5	4.5	HT-6/35AL	9	1	K06	5.7	1	EA	1
BLK35/16	35/16	7/1.70	19/1.53	70	32	21	8.5	5.5	HT-6/35AL	9	1	HT130-C-16	6.3	1	EA	1
BLK35/25	35/25	19/1.35	19/1.53	70	32	21	8.5	7.5	HT-6/35AL	9	1	HT130-C-25	7.7	1	EA	1
BLK35/35	35/35	19/1.53	19/1.53	70	32	21	8.5	8.5	HT-6/35AL	9	1	HT130-C-35	9.2	1	EA	1
BLK50/6	50/6	7/1.04	19/1.78	70	32	24	9.5	3.5	HT-50/70AL	13.2	1	K06	4.4	1	EA	1
BLK50/10	50/10	7/1.35	19/1.78	70	32	24	9.5	4.7	HT-50/70AL	13.2	1	K06	5.7	1	EA	1
BLK50/16	50/16	7/1.70	19/1.78	70	32	24	9.5	5.5	HT-50/70AL	13.2	1	HT130-C-16	6.3	1	EA	1
BLK50/25	50/25	19/1.35	19/1.78	70	32	24	9.5	7.1	HT-50/70AL	13.2	1	HT130-C-25	7.7	1	EA	1
BLK50/35	50/35	19/1.53	19/1.78	70	32	24	9.5	8.2	HT-50/70AL	13.2	1	HT130-C-35	9.2	1	EA	1
BLK50/50	50/50	19/1.78	19/1.78	70	32	24	9.5	9.5	HT-50/70AL	13.2	1	HT130-C-50	10.4	1	EA	1
BLK70/16	70/16	7/1.70	19/2.14	70	32	24	11.5	5.5	HT-50/70AL	13.2	1	HT130-C-16	6.3	1	EA	1
BLK70/25	70/25	19/1.35	19/2.14	70	32	24	11.5	7.1	HT-50/70AL	13.2	1	HT130-C-25	7.7	1	EA	1
BLK70/35	70/35	19/1.53	19/2.14	70	32	24	11.5	8.2	HT-50/70AL	13.2	1	HT130-C-35	9.2	1	EA	1
BLK70/50	70/50	19/1.78	19/2.14	70	32	24	11.5	9.5	HT-50/70AL	13.2	1	HT130-C-50	10.4	1	EA	1
BLK70/70	70/70	19/2.14	19/2.14	70	32	24	11.5	11.2	HT-50/70AL	13.2	1	HT130-C-70	11.5	1	EA	1
BLK95/10	95/10	7/1.35	37/1.78	110	60	24	13.5	4.7	HT-95/120AL	17.3	2	HT130-C-10, K26, K06	5.7	1	EA	1
BLK95/16	95/16	7/1.70	37/1.78	110	60	32	13.5	5.5	HT-95/120AL	17.3	2	HT130-C-16	6.3	1	EA	1
BLK95/25	95/25	19/1.35	37/1.78	110	60	32	13.5	7.1	HT-95/120AL	17.3	2	HT130-C-25	7.7	1	EA	1
BLK95/35	95/35	19/1.53	37/1.78	110	60	32	13.5	8.2	HT-95/120AL	17.3	2	HT130-C-35	9.2	1	EA	1
BLK95/50	95/50	19/1.78	37/1.78	110	60	32	13.5	9.5	HT-95/120AL	17.3	2	HT130-C-50	10.4	1	EA	1
BLK95/70	95/70	19/2.14	37/1.78	110	60	32	13.5	11.5	HT-95/120AL	17.3	2	HT130-C-70	11.5	1	EA	1
BLK95/95	95/95	37/1.78	37/1.78	110	60	32	13.5	13.5	HT-95/120AL	17.3	2	HT130-C-95	14.2	1	EA	1
BLK120/16	120/16	7/1.70	37/2.03	110	60	24	15.5	5.5	HT-95/120AL	17.3	2	HT130-C-16	6.3	1	EA	1
BLK120/25	120/25	19/1.35	37/2.03	110	60	24	15.5	7.1	HT-95/120AL	17.3	2	HT130-C-25	7.7	1	EA	1
BLK120/35	120/35	37/1.53	37/2.03	110	60	32	15.5	8.2	HT-95/120AL	17.3	2	HT130-C-35	9.2	1	EA	1
BLK120/50	120/50	19/1.78	37/2.03	110	60	32	15.5	9.5	HT-95/120AL	17.3	2	HT130-C-50	10.4	1	EA	1
BLK120/70	120/70	19/2.14	37/2.03	110	60	32	15.5	11.2	HT-95/120AL	17.3	2	HT130-C-70	11.5	1	EA	1
BLK120/95	120/95	37/1.78	37/2.03	110	60	32	15.5	13.4	HT-95/120AL	17.3	2	HT130-C-95	14.2	1	EA	1
BLK120/120	120/120	37/2.03	37/2.03	110	60	32	15.5	15.5	HT-95/120AL	17.3	2	HT130-C-120	16.5	1	EA	1

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

150MM-630MM BI-METAL REDUCING LINKS

SPECIFI SPECIFICATIONS AND ORDERING INFORMATION (CONT.)

Part No.	Al/Cu Nominal Conductor (mm ²)	Strand No.	Al Strand	A (mm)	E (mm)	F (mm)	Y (mm)	Z (mm)	Alum Crimp Die	Alum A/F Hex Die (mm ²)	Al No. Crimp	Copper Crimp Die	Copper A/F Hex Die (mm ²)	No. Crimp	Unit	Qty
BLK150/16	150/16	7/1.70	37/2.25	120	60	32	16.5	5.5	HT-150/185AL	22	2	HT130-C-16	6.3	1	EA	1
BLK150/25	150/25	19/1.35	37/2.25	120	60	32	16.5	7.1	HT-150/185AL	22	2	HT130-C-25	7.7	1	EA	1
BLK150/35	150/35	37/1.53	37/2.25	120	60	32	16.5	8.2	HT-150/185AL	22	2	HT130-C-35	9.2	1	EA	1
BLK150/50	150/50	19/1.78	37/2.25	120	60	40	16.5	9.5	HT-150/185AL	22	2	HT130-C-50	10.4	1	EA	1
BLK150/70	150/70	19/2.14	37/2.25	120	60	40	16.5	11.2	HT-150/185AL	22	2	HT130-C-70	11.5	1	EA	1
BLK150/95	150/95	37/1.78	37/2.25	120	60	40	16.5	13.4	HT-150/185AL	22	2	HT130-C-95	14.2	1	EA	1
BLK150/120	150/120	37/2.03	37/2.25	120	60	40	16.5	15.5	HT-150/185AL	22	2	HT130-C-120	16.5	2	EA	1
BLK150/150	150/150	37/2.25	37/2.25	120	60	40	16.5	16.5	HT-150/185AL	22	2	HT130-C-150	18.3	2	EA	1
BLK185/16	185/16	7/1.70	37/2.25	120	60	40	18.5	5.5	HT-150/185AL	22	2	HT130-C-16	6.3	1	EA	1
BLK185/25	185/25	19/1.35	37/2.25	120	60	40	18.5	7.1	HT-150/185AL	22	2	HT130-C-25	7.7	1	EA	1
BLK185/35	185/35	19/1.53	37/2.25	120	60	40	18.5	8.2	HT-150/185AL	22	2	HT130-C-35	9.2	1	EA	1
BLK185/50	185/50	19/1.78	37/2.25	120	60	40	18.5	9.5	HT-150/185AL	22	2	HT130-C-50	10.4	1	EA	1
BLK185/70	185/70	19/2.14	37/2.25	120	60	40	18.5	11.2	HT-150/185AL	22	2	HT130-C-70	11.5	1	EA	1
BLK185/95	185/95	37/1.78	37/2.25	120	60	40	18.5	13.4	HT-150/185AL	22	2	HT130-C-95	14.2	1	EA	1
BLK185/120	185/120	37/2.03	37/2.25	120	60	40	18.5	15.5	HT-150/185AL	22	2	HT130-C-120	16.5	2	EA	1
BLK185/150	185/150	37/2.25	37/2.25	120	60	40	18.5	16.7	HT-150/185AL	22	2	HT130-C-150	18.3	2	EA	1
BLK185/185	185/185	37/2.52	37/2.25	120	60	40	18.5	18.5	HT-150/185AL	22	2	HT130-C-185	20	2	EA	1
BLK240/16	240/16	7/1.70	61/2.25	120	60	40	22	5.5	HT-240/300AL	28.4	2	HT130-C-16	6.3	1	EA	1
BLK240/25	240/25	7/2.14	61/2.25	120	60	40	22	7.1	HT-240/300AL	28.4	2	HT130-C-25	7.7	1	EA	1
BLK240/50	240/50	19/1.78	61/2.25	120	60	40	22	9.5	HT-240/300AL	28.4	2	HT130-C-50	10.4	1	EA	1
BLK240/70	240/70	19/2.14	61/2.25	120	60	40	22	11.2	HT-240/300AL	28.4	2	HT130-C-70	11.5	1	EA	1
BLK240/95	240/95	19/2.52	61/2.25	120	60	40	22	13.4	HT-240/300AL	28.4	2	HT130-C-95	14.2	1	EA	1
BLK240/120	240/120	37/2.03	61/2.25	120	60	40	22	15.6	HT-240/300AL	28.4	2	HT130-C-120	16.5	2	EA	1
BLK240/150	240/150	37/2.25	61/2.25	120	60	40	22	16.5	HT-240/300AL	28.4	2	HT130-C-150	18.3	2	EA	1
BLK240/185	240/185	37/2.52	61/2.25	120	60	40	22	18.5	HT-240/300AL	28.4	2	HT130-C-185	20	2	EA	1
BLK240/240	240/240	61/2.25	61/2.25	120	60	40	22	21.5	HT-240/300AL	28.4	2	HT130-C-240	23.1	3	EA	1
BLK300/25	300/25	7/2.14	61/2.52	120	60	40	23.5	7.1	HT-240/300AL	28.4	2	HT130-C-25	7.7	1	EA	1
BLK300/70	300/70	19/2.14	61/2.52	120	60	40	23.5	11.2	HT-240/300AL	28.4	2	HT130-C-70	11.5	1	EA	1
BLK300/95	300/95	19/2.52	61/2.52	120	60	40	23.5	13.4	HT-240/300AL	28.4	2	HT130-C-95	14.2	1	EA	1
BLK300/120	300/120	37/2.03	61/2.52	120	60	40	23.5	15.5	HT-240/300AL	28.4	2	HT130-C-120	16.5	2	EA	1
BLK300/150	300/150	37/2.25	61/2.52	120	60	40	23.5	16.5	HT-240/300AL	28.4	2	HT130-C-150	18.3	2	EA	1
BLK300/185	300/185	37/2.52	61/2.52	120	60	40	23.5	18.5	HT-240/300AL	28.4	2	HT130-C-185	20	2	EA	1
BLK300/240	300/240	61/2.25	61/2.52	120	60	40	23.5	21.5	HT-240/300AL	28.4	2	HT130-C-240	23.1	3	EA	1
BLK300/300	300/300	61/2.52	61/2.52	120	60	40	23.5	23.5	HT-240/300AL	28.4	2	HT130-C-300	26	3	EA	1
BLK400/300	400/300	61/2.52	61/2.85	155	70	55	26.5	23.5	ECW-H3D4/500AL	39	2	ECW-H3D-300	26	3	EA	1
BLK400/400	400/400	61/2.85	61/2.85	155	70	55	26.5	26.5	ECW-H3D4/500AL	39	2	ECW-H3D-400	28.1	3 overlap	EA	1
BLK500/400	500/400	61/2.85	61/3.20	155	70	55	30	26.5	ECW-H3D4/500AL	39	2	ECW-H3D-400	28.1	3 overlap	EA	1
BLK500/500	500/500	61/3.20	61/3.20	155	70	55	30	30	ECW-H3D4/500AL	39	2	ECW-H3D-500	31	3 overlap	EA	1
BLK630/400	630/400	61/2.85	127/2.52	160	70	56	34	26.5	RHU520-800	43.2	2	ECW-H3D-400	28.1	3	EA	1
BLK630/500	630/500	61/3.20	127/2.52	160	70	56	34	30	RHU520-800	43.2	2	ECW-H3D-500	31	3	EA	1
BLK630/630	630/630	127/2.52	127/2.52	160	70	56	34	34	RHU520-800	43.2	2	ECW-H3D-630	37	4 overlap	EA	1

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.