

# JUMBO LED EXIT



**40m VIEWING DISTANCE** - 250mm high pictograph.

**LONG LIFE LED** - Energy efficient, Long Life.  
Available in premium 100,000hr LED.

**EASY INSTALL** - Large terminal block and cable entry hole minimise installation fuss.

**TESTING OPTIONS** - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our Premium range.

Clevertronics' Jumbo range caters for applications requiring viewing distances not covered by conventional 24m exits.

An amazing 60% increase in emergency lighting coverage, compared with most existing premium emergency lights, which means you use less in an installation. Lithium Iron Phosphate batteries from Clevertronics LP™ Premium and L10™ Optimum range give long life and dramatically lower the power consumption and reduce materials use, all this with an unprecedented lifetime lamp warranty.

The standard Jumbo exit uses a 250mm high pictograph for viewing distances up to 40 metres. Featuring robust steel housing with slide in diffusers and back plates for single-sided and double-sided configurations.

## SAVE TIME AND MONEY - UPGRADE TO CLEVERTEST™

**LOWER INSTALLATION COSTS**  
**LOWER TESTING COSTS**

Emergency lights that perform their six monthly discharge tests by themselves, and indicate their status via a bi-colour flashing LED. No need for a manual test-switch.

**EMERGENCY LIGHTS THAT TEST THEMSELVES!**

**clevertest™**



# JUMBO LED EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
LP - LED - WM -R	CJELED-40-WM-R	CJELED-40-WM-CT-R	CJELED-40-WM-DATA-R	CJELED-40-WM-DALI-R	CJELED-40-WM-ZW-R
LP - LED - WM -E	CJELED-40-WM-E	CJELED-40-WM-CT-E	CJELED-40-WM-DATA-E	CJELED-40-WM-DALI-E	CJELED-40-WM-ZW-E
LP - LED - CM -R	CJELED-40-CM-R	CJELED-40-CM-CT-R	CJELED-40-CM-DATA-R	CJELED-40-CM-DALI-R	CJELED-40-CM-ZW-R
LP - LED - CM -E	CJELED-40-CM-E	CJELED-40-CM-CT-E	CJELED-40-CM-DATA-E	CJELED-40-CM-DALI-E	CJELED-40-CM-ZW-E
LP - LED - CM -DS -R	CJELED-40-CM-DS-R	CJELED-40-CM-CT-DS-R	CJELED-40-CM-DATA-DS-R	CJELED-40-CM-DALI-DS-R	CJELED-40-CM-ZW-DS-R
LP - LED - CM -DS -E	CJELED-40-CM-DS-E	CJELED-40-CM-CT-DS-E	CJELED-40-CM-DATA-DS-E	CJELED-40-CM-DALI-DS-E	CJELED-40-CM-ZW-DS-E

For directional options please add L or R to above codes for Left or Right Arrow i.e CJELED-40-CM-R

L10 - LED - WM -R	LJELED-40-WM-R	LJELED-40-WM-CT-R	LJELED-40-WM-DATA-R	LJELED-40-WM-DALI-R	LJELED-40-WM-ZW-R
L10 - LED - WM -E	LJELED-40-WM-E	LJELED-40-WM-CT-E	LJELED-40-WM-DATA-E	LJELED-40-WM-DALI-E	LJELED-40-WM-ZW-E
L10 - LED - CM -R	LJELED-40-CM-R	LJELED-40-CM-CT-R	LJELED-40-CM-DATA-R	LJELED-40-CM-DALI-R	LJELED-40-CM-ZW-R
L10 - LED - CM -E	LJELED-40-CM-E	LJELED-40-CM-CT-E	LJELED-40-CM-DATA-E	LJELED-40-CM-DALI-E	LJELED-40-CM-ZW-E
L10 - LED - CM -DS -R	LJELED-40-CM-DS-R	LJELED-40-CM-CT-DS-R	LJELED-40-CM-DATA-DS-R	LJELED-40-CM-DALI-DS-R	LJELED-40-CM-ZW-DS-R
L10 - LED - CM -DS -E	LJELED-40-CM-DS-E	LJELED-40-CM-CT-DS-E	LJELED-40-CM-DATA-DS-E	LJELED-40-CM-DALI-DS-E	LJELED-40-CM-ZW-DS-E

For directional options please add L or R to above codes for Left or Right Arrow i.e LJELED-40-CM-R

## LP PREMIUM LED

Wall or ceiling quick connect exit, 100,000 hour LED, environmentally responsible, low maintenance, long life Lithium Iron Phosphate battery, 2 year back to base warranty, single and double sided and directional options configurable on site.

## L10 OPTIMUM LED


Wall or ceiling quick connect exit, 100,000 hour LED, state of the art environmentally responsible Lithium Iron Phosphate battery with no heavy metals or carcinogens, 4 year back to base warranty, single and double sided and directional options configurable on site.

## TESTING OPTIONS

<b>clevertest</b>	Exit and Emergency luminaires automatically test every six months.
<b>DALI EM</b>	Smooth integration and networking with DALI Lighting Control Systems.
<b>ZONEWORKS</b>	A real-time, automatic monitoring and testing facility for emergency luminaires.

## SPECIFICATIONS

	Warranty	Power Consumption	C0	C90
<b>CJELED-40</b>	2 YEARS	4.6W	D8	B8
<b>LJELED-40</b>	4 YEARS	4.6W	D8	B8

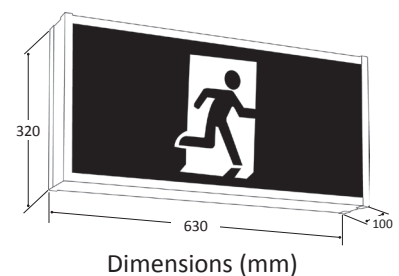

Dimensions (mm)

## SPACING TABLE & MOUNTING HEIGHTS

Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m
B8	5.4	5.7	6.0	6.2	6.4	6.6	6.7	6.9	6.9	6.6	5.9	4.4
D8	9.4	9.7	9.9	10.1	10.2	10.3	10.4	10.3	10.2	9.5	8.3	6.1

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

## SPARE PARTS

	Battery	Lamp	Clevertest™ Node	Zoneworks® Node	Diffuser
<b>CJELED-40</b>	1550230	8002470	8001730	8001450	PJED-R-SLIDE
<b>LJELED-40</b>	1530230	8002470	8001730	8001450	PJED-R-SLIDE

Version: June 2014-1

Please check our website for your closest Clevertronics office and local representative.  
Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

[www.clevertronics.com.au](http://www.clevertronics.com.au)