

ULTRABLADE PRO SURFACE MOUNT EXIT



Surface Mounted Architectural Blade Exit


The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium surface mounted exit. With a reduced reflection and halo effect on the diffuser and a decal that is scratch and fingerprint resistant it is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.

Applications



Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.4W to 1.8W standby power consumption
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

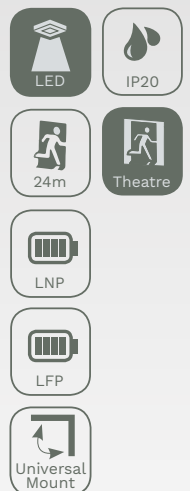

ULTRABLADE PRO SURFACE MOUNT EXIT

ORDERING INFORMATION		EL ECONOMY	LP PREMIUM	L10 NANOPHOSPHATE®
PART NO.	Standard	EUBPRO-SM-LI	CUBPRO-SM	LUBPRO-SM
	Clevertest Plus System Compatible	No	Yes	Yes
	Digital Addressable Lighting Interface	-	CUBPRO-SM-DLI	LUBPRO-SM-DLI
	Zoneworks® XT	-	CUBPRO-SM-ZW	LUBPRO-SM-ZW
	Theatre Version	No	CUBPRO-SM-TH	LUBPRO-SM-TH
Carton Quantity		5		
Weight - Net (Gross)		1.0kg (7.5kg)		
Dimensions (L x W x H)		317mm x 8.7mm x 157mm - Blade Assembly 360mm x 47mm x 72mm - Base		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)		-	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CUBPRO-SM-TH-DS-RR	

POWER, LAMPS AND BATTERY	EL ECONOMY	LP PREMIUM	L10 NANOPHOSPHATE®
Power Consumption (Standby / Max)	1.8W / 2.8W	1.4W / 3.7W	
Lamp(s)	12 x Duris E3 LED		
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Milliamp Per Hour (mAh)	TBC	3.2V / 1100mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS		SPARE PARTS	EL	LP	L10
Operating Mode	Maintained	Battery	TBC	1550105	1530030
Voltage (V) Frequency (Hz)	220-240V (50Hz)	Lamp Bar	8002179	8002389	8002389
Construction - Body/Diffuser	PC-ABS / PC	DLI Node	N/A	8002200	8002200
Viewing Distance	24m	Zoneworks® Node	N/A	8001450	8001450
Mounting Type	Single and Double Sided	Diffuser	2310250	2310250	2310250
Operating Temperature	1°C to 40°C				
IP Rating (IP)	IP20				


CLASSIFICATION	EL	LP	L10
C0	E5	E6.3	E6.3
C90	E5	E6.3	E6.3

AS2293 SPACING TABLE AND MOUNTING HEIGHTS

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	5.0m
E5	6.6	7.2	7.4	7.8	8.0	8.2	8.4	-
E6.3	7.0	7.6	8.0	8.4	8.6	8.8	9.2	9.4

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Based on minimum light level of 0.2 lux.
Maximum allowed mounting height is 2.7m
but for exceptions see AS/NZ2293.1.
Spacing classifications do not apply for
theatre versions.

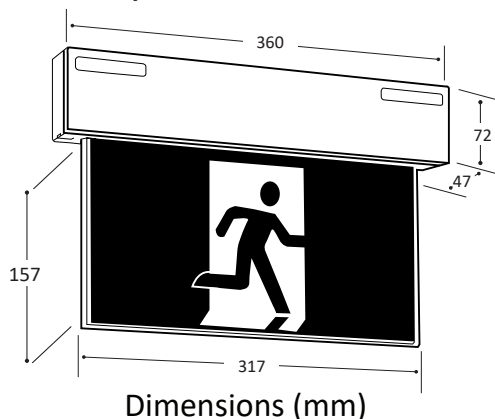

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road , Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
CT-BRO-ANZ-ULTRABLADEPRO-SM-EX-001

