



Surface Switches

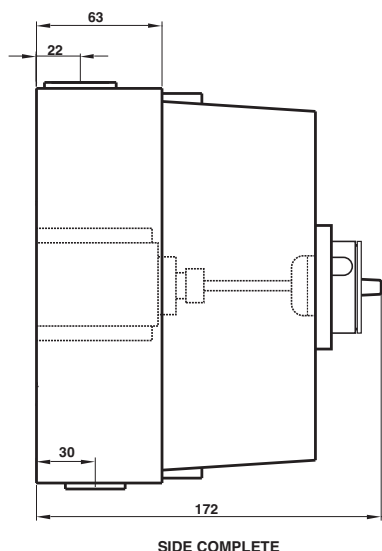

56SWH325,GY

Dimensional Drawings

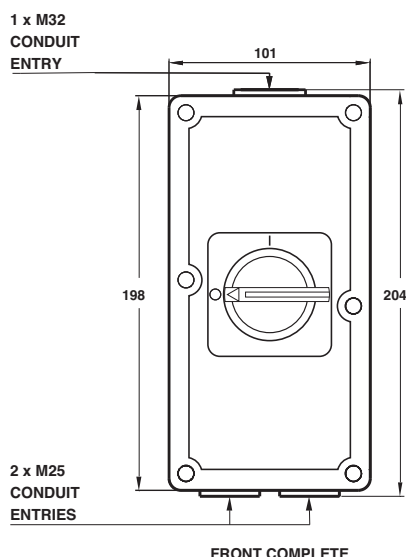

Heavy Duty Surface Switches

Clipsal Heavy-Duty Surface Switches come with integral 3 or 4 pole configurations, from 25 to 80A ratings. The switch actuator comes standard in safety red/yellow and has 3 padlocking facilities. Hole diameter is 8mm.

The switch is mounted separate to cover in a DIN mounting drop-in cradle which allows quick removal and installation.

The extra deep enclosure allows ample wiring space for easy installation and the switch is suited to motor rating.

Options available

- Resistant Orange - add RO to Catalogue Number eg. 56SWH325 becomes 56SWH325,RO
- Auxiliary contact - add C for 1 N/C 10A contact to Catalogue Number e.g. 56SWH325 becomes 56SWH325C. Add CO for 1 N/C and 1 N/O 10A contact to Catalogue Number e.g. 56SWH325 becomes 56SWH325CO

Catalogue Number	No. of switches poles	I _{the} (Amp)	U _i /U _e (Volt)	kW	I _e (A) Utilisation Cat.			Cond. Term Size in mm²		IP Rating	O/A Dims. (H) x (W) x (D)
					AC21A	AC22A	AC23A	Min.	Max		
Motor Rated in 56E2 Deep Lid											
56SWH325	3 Pole	25A	690V	7.5	25	25	25	1.5	16	56	204x101x172
56SWH340	3 Pole	25A	690V	11	40	40	25	1.5	16	56	204x101x172
56SWH363	3 Pole	63A	690V	25	63	63	63	1.5	35	56	204x101x172
56SWH380	3 Pole	80A	690V	25	80	80	63	1.5	35	56	204x101x172
56SWH425	4 Pole	25A	690V	7.5	25	25	25	1.5	25	56	204x101x172
56SWH440	4 Pole	40A	690V	11	40	40	25	1.5	25	56	204x101x172
56SWH463	4 Pole	63A	690V	25	63	63	40	1.5	25	56	204x101x172
Motor Rated in Stainless Steel Enclosures											
56SWH325S	3 Pole	25A	690V	7.5	25	25	25	1.5	16	56	204x101x172
56SWH340S	3 Pole	25A	690V	11	40	40	25	1.5	16	56	204x101x172
56SWH363S	3 Pole	63A	690V	25	63	63	63	1.5	35	56	204x101x172
56SWH380S	3 Pole	80A	690V	25	80	80	63	1.5	35	56	204x101x172
56SWH425S	4 Pole	25A	690V	7.5	25	25	25	1.5	25	56	204x101x172
56SWH440S	4 Pole	40A	690V	11	40	40	25	1.5	25	56	204x101x172
56SWH463S	4 Pole	63A	690V	25	63	63	40	1.5	25	56	204x101x172