



ECOFILL SB

*Plastic case
lighting capacitors*

IL

*Metal case
lighting capacitors*

ICAR: *technology looking ahead*



THE CAPACITOR

A thin metallized polypropylene film is the hearth of this component: the dielectric and the electrodes of the capacitor.


INNOVATION

Decades of successful experience in the high tech field, sustain consistent improvement in the daily production process.




VERTICAL INTEGRATION

Since 1965, Icar has produced metallized polypropylene film for the making its own components. Winding, spraying, finishing and testing are performed on-site using our specially designed equipment.

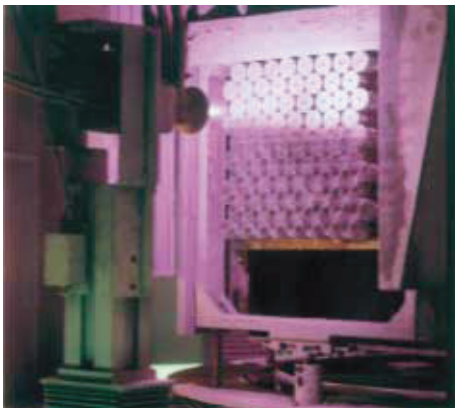

PROCESS CONTROL

ICAR controls the whole manufacturing process. Comprehensive quality tests through all stages of production ensure the high reliability of all the components of the capacitors. Automation excludes the possibility of human error.

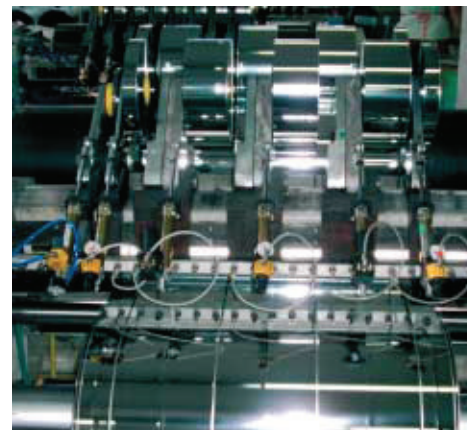


THE SUCCESS

A large number of our capacitors are sold on the foreign market. The measure of ICAR's success is its presence in over 50 countries worldwide.



PARALLEL APPLICATIONS

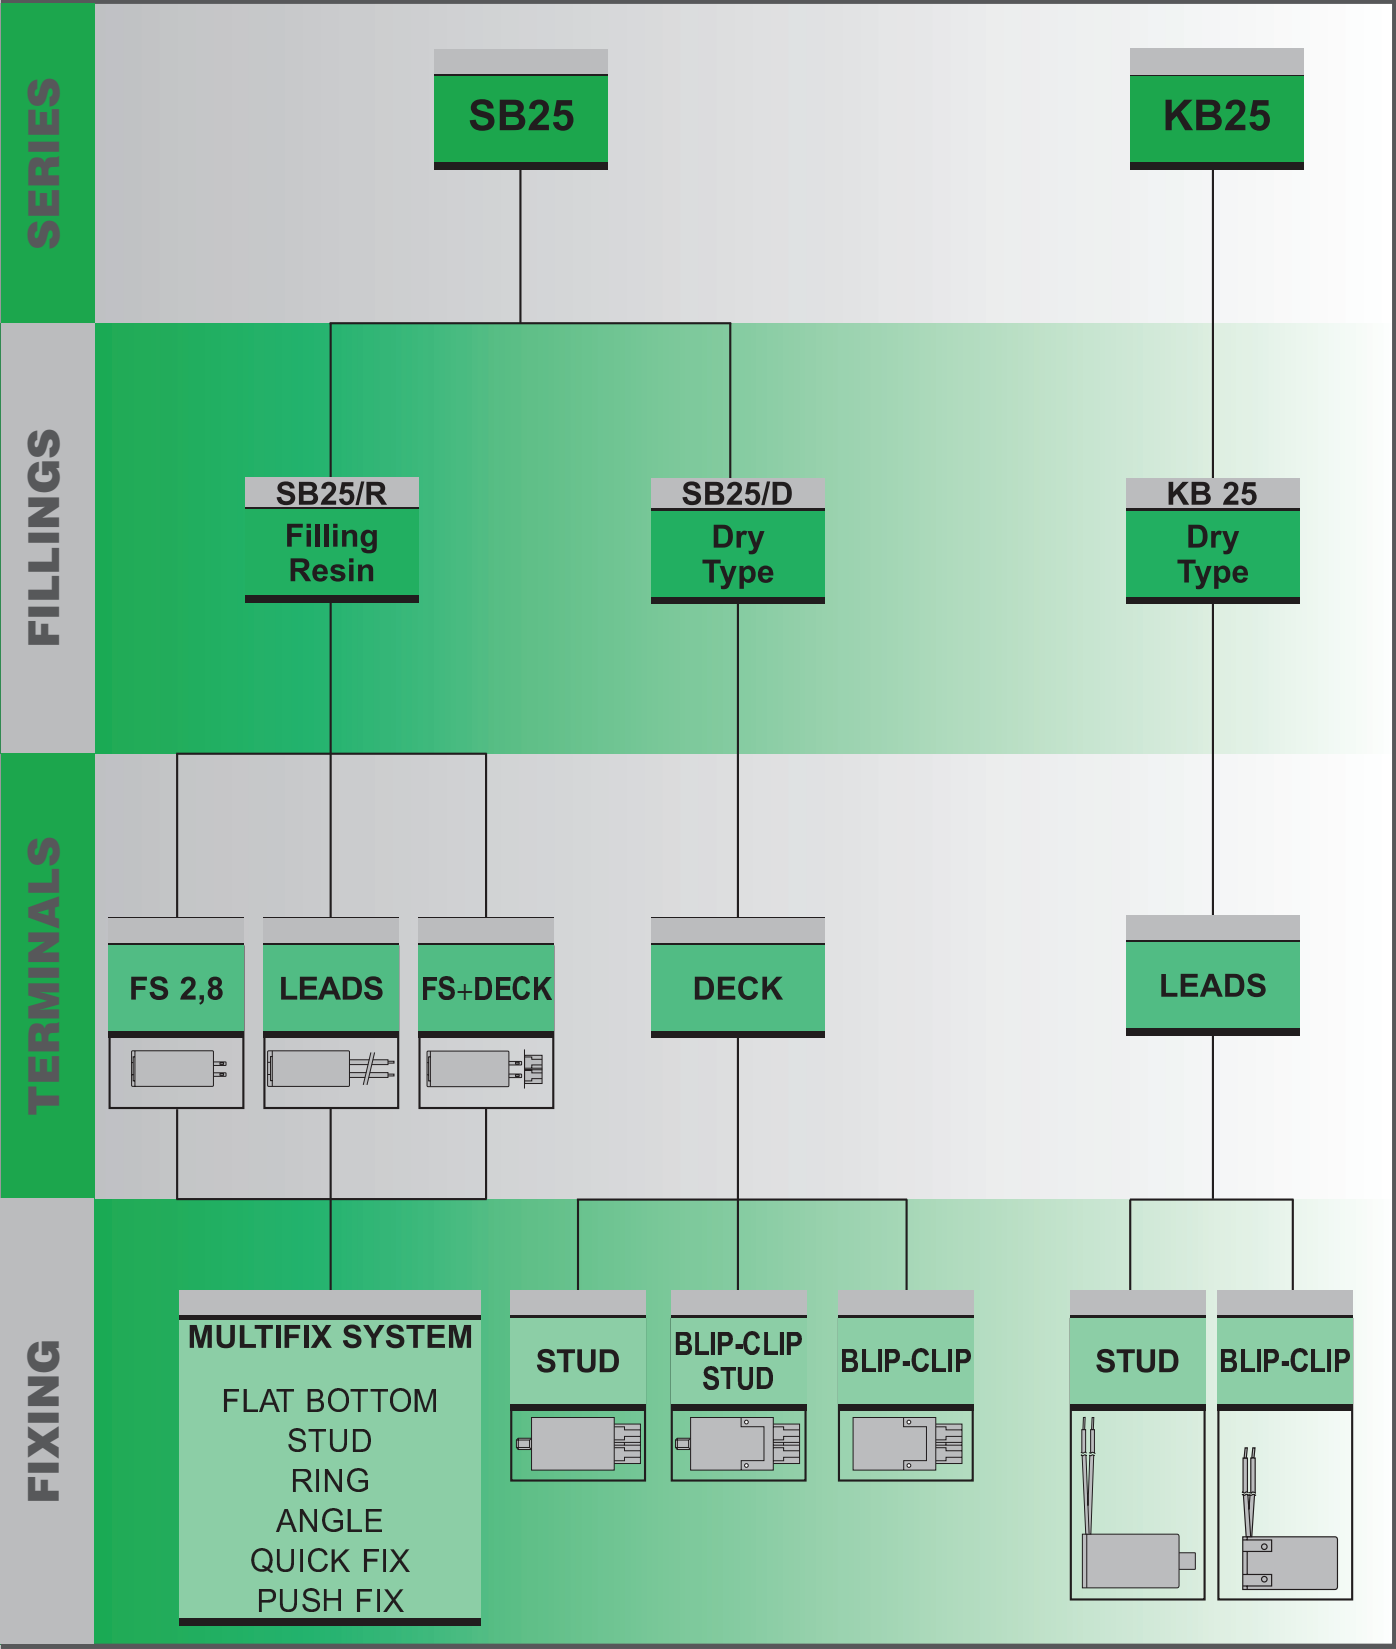

SB25 SERIES SB25/R

PLASTIC CASE LIGHTING CAPACITORS



1 - RESIN FILLED



TECHNICAL FEATURES


Case	self-extinguish plastic
Dielectric-armature	metallized polypropylene
Safety	Type A
Capacitance tolerance	$\pm 5\% \pm 10\%$
Rated Voltage	280÷250 V
Frequency	50÷60 Hz

Temperature range	-40°C/+85°C
Voltage test between terminals	$2U_n \times 2\text{sec}$
Voltage test between terminals & case	$2,5\text{KV} \times 2\text{sec}$
Tan δ @ 50 Hz (only with FS 2.8)	$< 5 \times 10^{-4}$
dv/dt typical	10 V/ μs

MULTIFIX



MULTIFIX is the easy fixing device.
Use it as it is or choose your
accessory.
Any fixing can be fitted in.

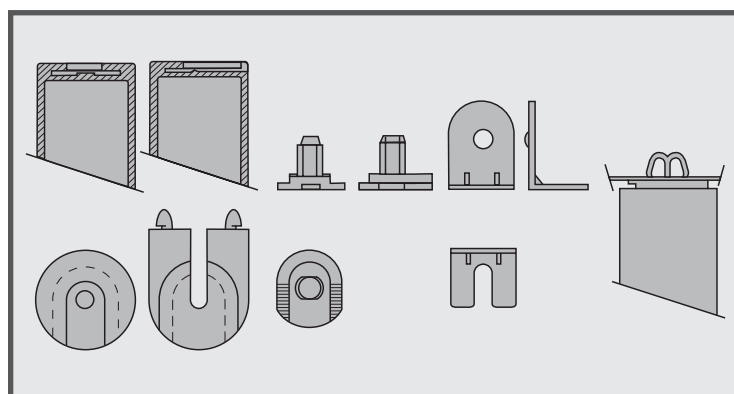


SB25 SERIES SB25/R

PLASTIC CASE LIGHTING CAPACITORS



1 - RESIN FILLED

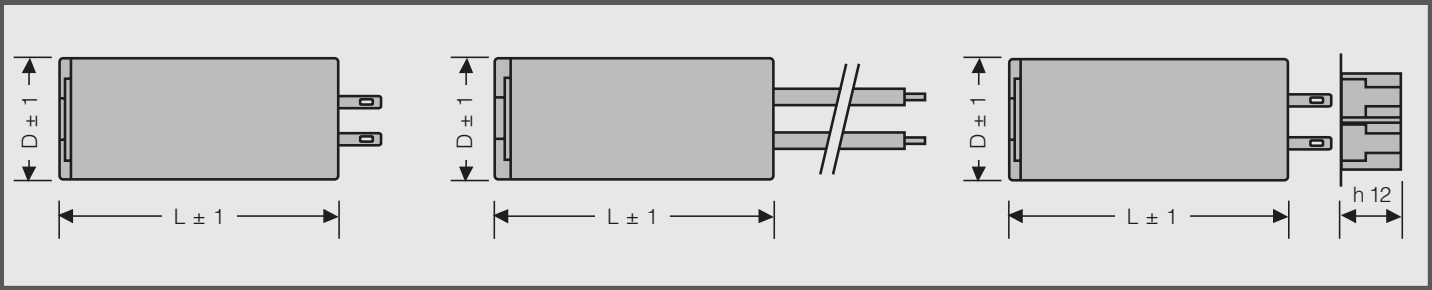

SB 25/R - FS2,8

CAP. [uF]	DIMENSIONS		Q.TY (BOX)
	D mm	L mm	
2,00	30	51	168
2,50	30	51	168
3,00	30	51	168
3,15	30	51	168
3,50	30	51	168
4,00	30	51	168
4,50	30	51	168
5,00	30	51	168
6,00	30	51	168
6,30	30	51	168
7,00	30	51	168
7,50	30	51	168
8,00	30	71	168
9,00	30	71	168
10,00	30	71	168
11,00	30	71	168
12,00	35	71	120
12,50	35	71	120
13,00	35	71	120
13,50	35	71	120
14,00	35	71	120
15,00	35	71	120
16,00	35	71	120
18,00	40	71	90
20,00	40	71	90
22,00	40	71	90
25,00	45	71	72
30,00	45	71	72
32,00	45	91	72
35,00	45	91	72
40,00	45	91	72
45,00	45	116	72
50,00	45	116	72
55,00	45	116	72
60,00	45	116	72
65,00	50	116	56

SB 25/R - LEADS

CAP. [uF]	DIMENSIONS		Q.TY (BOX)
	D mm	L mm	
2,00	25	51	238
2,50	25	51	238
3,00	25	51	238
3,15	25	51	238
3,50	25	51	238
4,00	25	51	238
4,50	30	51	168
5,00	30	51	168
6,00	30	51	168
6,30	30	51	168
7,00	30	51	168
7,50	30	51	168
8,00	30	71	168
9,00	30	71	168
10,00	30	71	168
11,00	30	71	168
12,00	35	71	120
12,50	35	71	120
13,00	35	71	120
13,50	35	71	120
14,00	35	71	120
15,00	35	71	120
16,00	35	71	120
18,00	40	71	90
20,00	40	71	90
22,00	40	71	90
25,00	45	71	72
30,00	45	71	72
32,00	45	91	72
35,00	45	91	72
40,00	45	91	72
45,00	45	116	72
50,00	45	116	72
55,00	45	116	72
60,00	45	116	72
65,00	50	116	56

SB 25/R - FS DECK

CAP. [uF]	DIMENSIONS		Q.TY (BOX)
	D mm	L mm	
2,00	30	51	168
2,50	30	51	168
3,00	30	51	168
3,15	30	51	168
3,50	30	51	168
4,00	30	51	168
4,50	30	51	168
5,00	30	51	168
6,00	30	51	168
6,30	30	51	168
7,00	30	51	168
7,50	30	51	168
8,00	30	71	168
9,00	30	71	168
10,00	30	71	168
11,00	30	71	168
12,00	35	71	120
12,50	35	71	120
13,00	35	71	120
13,50	35	71	120
14,00	35	71	120
15,00	35	71	120
16,00	35	71	120
18,00	40	71	90
20,00	40	71	90
22,00	40	71	90
25,00	45	71	72
30,00	45	71	72
32,00	45	91	72
35,00	45	91	72
40,00	45	91	72
45,00	45	116	72
50,00	45	116	72
55,00	45	116	72
60,00	45	116	72
65,00	50	116	56

SB25 SERIES SB25/D

PLASTIC CASE LIGHTING CAPACITORS



2 - DRY TYPE



TECHNICAL FEATURES

Case	self-extinguish plastic
Dielectric-armature	metallized polypropylene
Safety	Type A
Capacitance tolerance	$\pm 5\% \pm 10\%$
Rated Voltage	280÷250 V
Frequency	50÷60 Hz
Temperature range	-25°C/+85°C
Voltage test between terminals	$2U_n \times 2\text{sec}$
Voltage test between terminals & case	$2,5\text{KV} \times 2\text{sec}$
Tan δ @ 50 Hz	$< 5 \times 10^{-4}$
dv/dt typical	10 V/ μs



SB25/D-DECK -STUD

CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
2,00	30	53	250
2,50	30	53	250
3,00	30	53	250
3,15	30	53	250
3,50	30	53	250
4,00	30	53	250
4,50	30	53	250
5,00	30	53	250
6,00	30	53	250
7,00	30	53	250
7,50	30	69	200
8,00	30	69	200
9,00	30	69	200
10,00	30	69	200
11,00	30	93	140
12,00	30	93	140
12,50	30	93	140
14,00	30	93	140
15,00	30	93	140
16,00	30	93	140
18,00	35	93	80
20,00	35	93	80
22,00	35	93	80
25,00	35	93	80
30,00	40	93	60
32,00	40	93	60
35,00	40	93	60
40,00	40	93	60

SB25/D-DECK-BCo-STUD

CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
2,00	30	53	250
2,50	30	53	250
3,00	30	53	250
3,15	30	53	250
3,50	30	53	250
4,00	30	53	250
4,50	30	53	250
5,00	30	53	250
6,00	30	53	250
7,00	30	53	250
7,50	30	69	200
8,00	30	69	200
9,00	30	69	200
10,00	30	69	200
11,00	30	93	140
12,00	30	93	140
12,50	30	93	140
13,00	30	93	140
14,00	30	93	140
15,00	30	93	140
16,00	30	93	140

BCo = fixing:blip clip oriented

SB25/D-DECK-BC

CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
2,00	30	55	250
2,50	30	55	250
3,00	30	55	250
3,15	30	55	250
3,50	30	55	250
4,00	30	55	250
4,50	30	55	250
5,00	30	55	250
6,00	30	55	250
7,00	30	55	250
7,50	30	68	200
8,00	30	68	200
9,00	30	68	200
10,00	30	68	200
11,00	30	92	140
12,00	30	92	140
12,50	30	92	140
14,00	30	92	140
15,00	30	92	140
16,00	30	92	140
18,00	35	92	80
20,00	35	92	80
22,00	35	92	80
25,00	35	92	80

KB25 SERIES KB25/D

PLASTIC CASE LIGHTING CAPACITORS




2 - DRY TYPE



[EN 61048 / EN 61049]

KB25/D-LEADS-STUD

CAP [uF]	DIMENSIONS		Q.TY (BOX)	CAP. [uF]	DIMENSIONS		Q.TY (BOX)
	D mm	L mm			D mm	L mm	
2,00	28	54	200	12,00	36	67	120
2,50	28	54	200	12,50	36	67	120
3,00	28	54	200	14,00	36	67	120
3,15	28	54	200	15,00	36	67	120
3,50	28	54	200	16,00	36	92	80
4,00	28	54	200	18,00	36	92	80
4,50	28	54	200	20,00	36	92	80
5,00	28	54	200	22,00	36	92	80
6,00	28	54	200	25,00	40	92	60
7,00	28	67	170	30,00	40	92	60
7,50	32	67	150	32,00	45	92	60
8,00	32	67	150	35,00	45	92	60
9,00	32	67	150	40,00	45	92	60
10,00	32	67	150	45,00	50	93	50
11,00	32	67	150	50,00	50	93	50

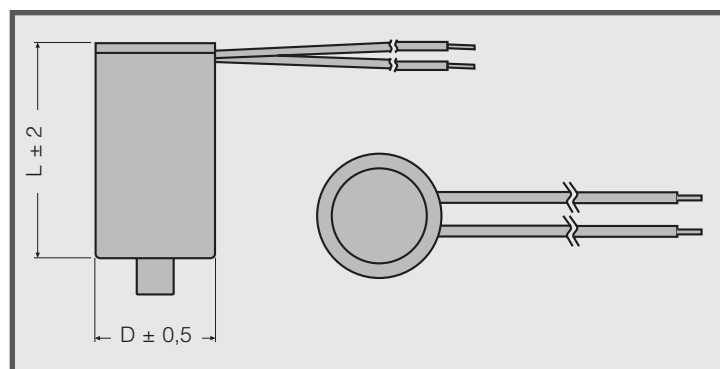

TECHNICAL FEATURES


Case	self-extinguish
Dielectric-armature	metallized polypropylene
Safety	Type A
Capacitance tolerance	±5 ±10%
Rated Voltage	280÷250 V
Frequency	50÷60 Hz
Temperature range	-25°C/+85°C
Voltage test between terminals	2U _n x 2sec
Voltage test between terminals & case	2,5KV x 2sec
Tan δ @ 50 Hz	< 5x10 ⁻⁴
dv/dt typical	10 V/μs



[EN 61048 / EN 61049]

KB25/D-LEADS-BLIP CLIP

CAP [uF]	DIMENSIONS		Q.TY (BOX)	CAP. [uF]	DIMENSIONS		Q.TY (BOX)
	D mm	L mm			D mm	L mm	
2,00	28	54	200	8,00	32	67	150
2,50	28	54	200	9,00	32	67	150
3,00	28	54	200	10,00	32	67	150
3,15	28	54	200	11,00	32	67	150
3,50	28	54	200	12,00	36	67	120
4,00	28	54	200	12,50	36	67	120
4,50	28	54	200	14,00	36	67	120
5,00	28	54	200	15,00	36	67	120
6,00	28	54	200	16,00	36	92	80
7,00	28	67	170	18,00	36	92	80
7,50	32	67	150	20,00	36	92	80

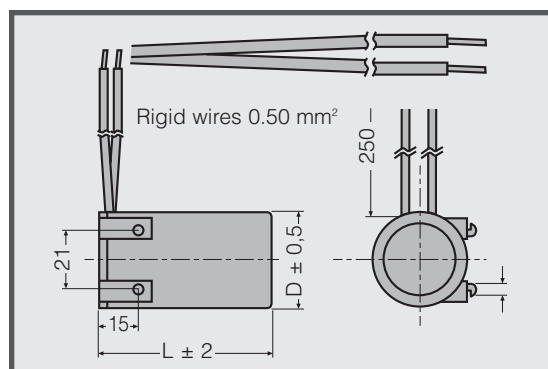

IL SERIES

METAL CASE LIGHTING CAPACITORS



1 - PARALLEL APPLICATIONS



TECHNICAL FEATURES

Case	aluminium
Dielectric-armature	metallized polypropylene
Safety	Type B - FP
Capacitance tolerance	± 5% ± 10%
Frequency	50÷60 Hz
Temperature range	-40°C/+100°C
Voltage test between terminals	2U _n x 2sec
Voltage test between terminals & case	2,5KV x 2sec
Tan δ @ 50 Hz	< 5x10 ⁻⁴
dv/dt typical	10 V/μs

IL 1 (FP)



AC 280 V 50/60 Hz
-40°C/+100°C TYPE B



CAP [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)	CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
2,00	30	63	100	13,00	35	78	81
2,50	30	63	100	14,00	30	103	100
3,00	30	63	100	14,00	35	78	81
3,15	30	63	100	15,00	30	103	100
3,50	30	63	100	15,00	35	103	81
4,00	30	63	100	16,00	35	103	81
4,50	30	63	100	18,00	35	103	81
5,00	30	63	100	20,00	35	103	81
6,00	30	78	100	22,00	40	103	64
6,30	30	78	100	25,00	40	103	64
7,00	30	78	100	30,00	40	103	64
8,00	30	78	100	32,00	45	128	50
9,00	30	78	100	35,00	45	128	50
10,00	30	78	100	40,00	45	128	50
11,00	30	103	100	45,00	45	128	50
11,00	35	78	81	50,00	45	128	50
12,00	30	103	100	52,00	55	128	36
12,00	35	78	81	55,00	55	128	36
12,50	30	103	100	60,00	55	128	36
12,50	35	78	81	65,00	55	128	36
13,00	30	103	100	70,00	55	128	36

IL 5 (FP)



AC 250 V 50/60 Hz
-40°C/+100°C TYPE B

CAP [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)	CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
4,50	30	63	100	14,00	30	78	100
5,00	30	63	100	15,00	30	103	100
6,00	30	63	100	15,00	35	78	81
6,30	30	63	100	16,00	30	103	100
7,00	30	63	100	16,00	35	78	81
8,00	30	63	100	18,00	30	103	100
9,00	30	63	100	18,00	35	78	81
10,00	30	78	100	20,00	30	103	100
11,00	30	78	100	20,00	35	78	81
12,00	30	78	100	22,00	30	103	100
12,50	30	78	100	22,00	35	78	81
13,00	30	78	100	25,00	35	103	81

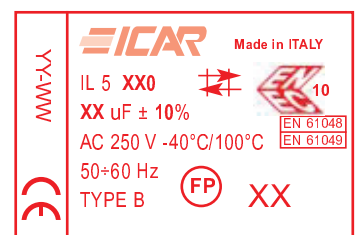

IL SERIES

METAL CASE LIGHTING CAPACITORS




2 - SERIES APPLICATIONS




TECHNICAL FEATURES

Case	aluminium
Dielectric-armature	metallized polypropylene
Safety	Type B - FP
Capacitance tolerance	$\pm 3 \pm 4\%$
Frequency	50÷60 Hz
Temperature range	-40°C/+100°C
Voltage test between terminals	$2U_n \times 2\text{sec}$
Voltage test between terminals & case	$2,5\text{KV} \times 2\text{sec}$
Tan δ @ 50 Hz	$< 5 \times 10^{-4}$
dv/dt typical	10 V/ μs

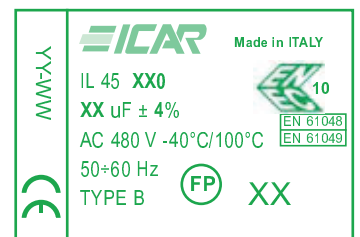

IL 45 (FP)




AC 480 V 50/60 Hz
-40°C/+100°C TYPE B

CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)	CAP. [uF]	DIMENSIONS D mm	L mm	Q.TY (BOX)
2,6	25	78	144	5	30	78	100
2,7	25	78	144	5,3	30	78	100
2,9	25	78	144	5,4	30	103	100
3	25	78	144	5,5	30	103	100
3,2	30	78	100	5,6	30	103	100
3,3	30	78	100	5,7	30	103	100
3,4	30	78	100	6,8	30	103	100
3,6	30	78	100	7,2	30	103	100
3,9	30	78	100	7,8	30	103	100
4	30	78	100	8	30	103	100
4,1	30	78	100	8,4	35	103	81
4,2	30	78	100	8,7	35	103	81
4,4	30	78	100				
4,6	30	78	100				

SAFETY LINE

All IL series capacitors are provided with overpressure safety device (FP). Total elongation is about 7 mm after overpressure disconnecter release. Do not use of rigid connections.

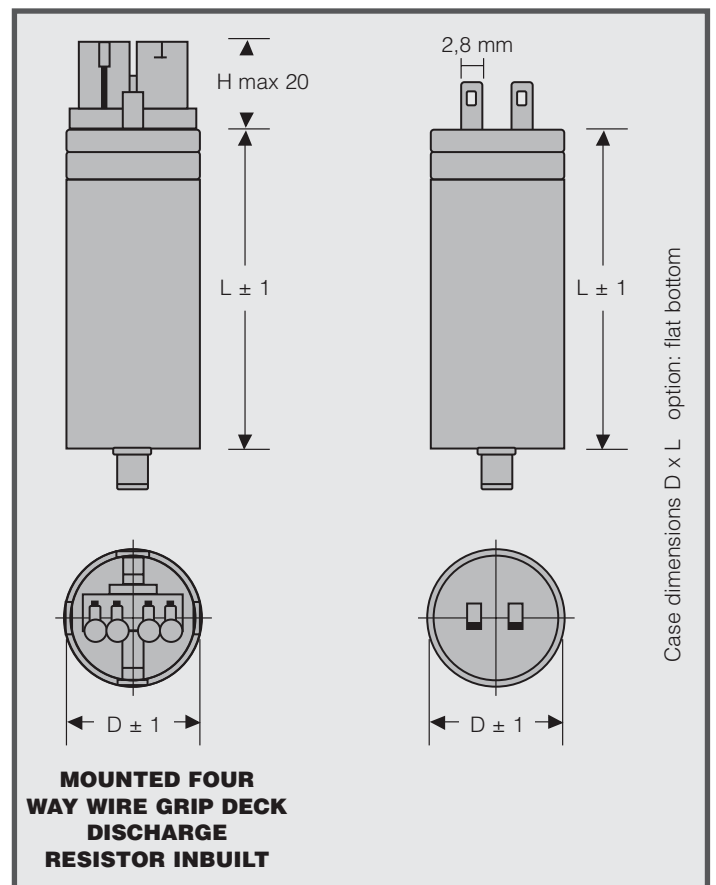

NOTES



Lined area for notes, consisting of multiple horizontal lines.



ICAR S.p.A.

Via Isonzo, 10

20052 Monza (Mi) - Italy

tel. +39 039 83.951

fax +39 039 83.32.27

www.icar.com

sales@icar.com