

#### Features

Triac dimmable  
CCT selectable: 3000K, 4000K, 5000K  
Polyamide body with latest heat dissipation technology  
Opal acrylic diffuser for even lighting output  
High efficiency SMD LED chips  
CRI  $\geq 80$  and good stability over lifetime  
With flex and plug  
Quick and simple installation, use spring clip to fix on ceiling  
IC-4 compliant  
IP44 below ceiling, IP40 above



#### Applications

Commercial building  
Boutiques  
Restaurants  
Bedrooms  
Offices / Meeting rooms


#### Standards

Manufactured under ISO 9001:2015 to standards  
IEC/AS/NZS 60598.1  
IEC/AS/NZS 60598.2.1  
IEC/AS/NZS 60598.2.2  
IEC/AS/NZS CISPR 15

#### Mounting Methods



Recessed






### Specifications

| Model                  | DA705CTD       |
|------------------------|----------------|
| Nominal Power (W)      | 6              |
| Input Voltage (V)      | 220-240        |
| Frequency (Hz)         | 50 / 60        |
| Luminous Flux (lm)     | 540            |
| Efficacy (lm/W)        | 90             |
| CRI (Ra)               | ≥80            |
| Power Factor           | >0.90          |
| SDCM                   | ≤5             |
| CCT (K)                | 3000/4000/5000 |
| Beam Angle (°)         | 90             |
| Rated Life L70B50 (hr) | 30000          |
| Ambient Temp. ta (°C)  | -20 to +35     |
| Weight (kg)            | 0.20           |


### Packaging Details

| Model                           | DA705CTD        |
|---------------------------------|-----------------|
| Product Carton Qty per box (pc) | 1               |
| Product Carton Dimension (mm)   | 105 x 97 x 66   |
| Master Carton Qty per box (pc)  | 69              |
| Master Carton Dimension (mm)    | 410 x 350 x 335 |

Lighting Data

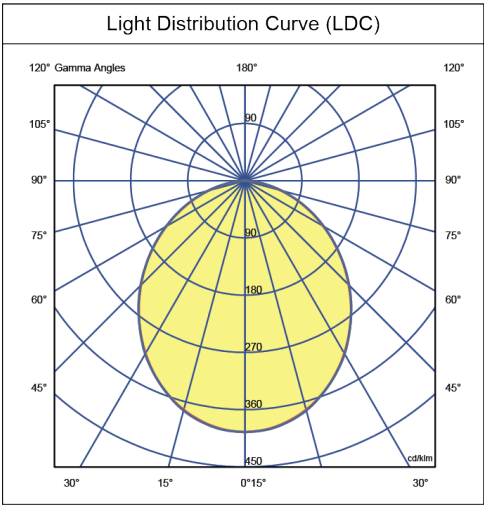

Dimensions



davislighting.com



davislighting.com.au

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.