

WYPLASH WPUT

Exterior Lighting / Weatherproof



WPUT435-R85S25

Features

Wide body IP65 rated Weatherproof Batten
Robust IK08 rated polycarbonate body and opal diffuser
Easy release stainless steel clip system
Available in 2ft and 4ft
50,000hrs (@L70) rated system
SELV compliant
Suitable for surface or pendant mount



Applications

Outdoor
Industrial
Car parks
Corridors and Stairwells
Public Amenities
Factories & warehouses


Options

Dali Dimming
Sensor with corridor function
Emergency

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15

Mounting Methods

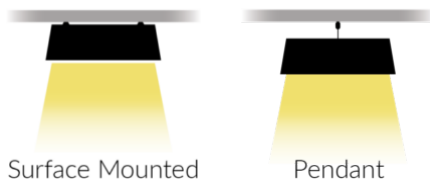

Surface Mounted

Pendant



WYPLASH WPUT

Exterior Lighting / Weatherproof



Specifications

Model	WPUT435-R85S25
Body Colour	Grey
Nominal Power (W)	35
Input Voltage (V)	220-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	4200
Luminaire Efficacy (lm/W)	120
CRI (Ra)	>80
Power Factor	>0.9
CCT (K)	5000
Beam Angle (°)	120
Luminaire Rated Life (hr)	>50000 @ L70
Operating Temp. (°C)	-20 to 35
Weight (kg)	2.2
IK Rating	IK08

Packaging Details

Model	WPUT435-R85S25
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	1270 x 130 x 93
Product Carton Weight (kg)	2.6
Master Carton Qty per box (pc)	4
Master Carton Dimension (mm)	1289 x 280 x 210
Master Carton Weight (kg)	8.4


WYPLASH WPUT

Exterior Lighting / Weatherproof





DAVISLIGHTING

Lighting Data

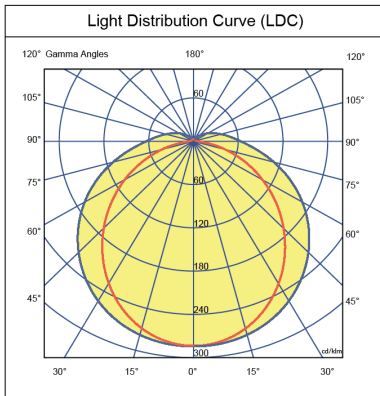

Dimension

WPUT435

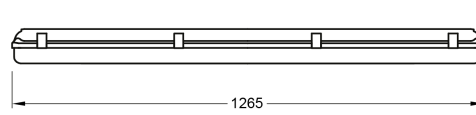

davislighting.com davislighting.com.au

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 03-03-2022
Copyright © 2022 Davis Lighting. All Rights Reserved.