

LEDsmart™



A complete range of in-wall
electronic accessories designed
to control LED lighting



High quality, in-wall lighting
control products with features
to meet a wide range of
installer and user requirements.
Designed in Australia, the range
includes dimmers, timers and
switches to control LED's and
other common light sources.



DIGINET
CONTROL SYSTEMS

LEDsmart™ Range

A complete range of in-wall

electronic accessories designed to control LED lighting



MEDM



ROTARY DIMMER

Analogue rotary dimmer.
Requires a separate on/off switch

- Analogue rotary dial with hard stop at max and min
- Green LED indicator
- Indicator stays on when lights are switched off
- Min/Max brightness setting via mechanical adjustment
- Soft start
- Short circuit and thermal protection



MEDM/DGRT



ROTARY DIMMER SWITCH

Digital programmable rotary dimmer. Built in tap on / tap off switch

- Digital rotary dial for smooth and easy dimming
- Built in Tap on / Tap off switch
- Fully programmable functions – see 'product functions' below
- 'Quick flick' dial feature to go to maximum or minimum lighting
- Double tap to dim to minimum or maximum over 30 minutes
- Illuminated halo via white LED indicators
- Interchangeable coloured rings (clear/blue/green/orange)



MEDM/DGPB



PUSH DIMMER SWITCH

Programmable digital push button dimmer. Built in tap on/tap off switch

- Push and hold to dim up/down
- Built in Tap on / Tap off switch
- Fully programmable functions – see 'product functions' below
- Double tap to dim to minimum or maximum over 30 minutes
- Illuminated bezel via white LED indicators
- Flush and rocker style button options



MESW/DGPB



PUSH SWITCH

Push button light switch with illuminated bezel to match LEDsmart™ dimmers and timers

- Tap on / Tap off light switch
- Fully programmable functions – see 'product functions' below
- Quiet, soft press button - no harsh click
- White LED, illuminated bezel
- Optional soft start switch on
- Flush and rocker style button options
- Simple 3-step programming



METM/DGPB



PUSH TIMER MINUTE

Programmable digital minute timer to turn off lighting automatically after a pre-set period

- Programmable between 1 minute and 30 minutes, in 1 minute steps
- Simple 3-step timer interval setting
- Override function to prevent lighting turning off automatically
- Advanced warning option dims to 50% for 5 minutes after time out
- Programmable maximum level and off state indicator
- White LED, illuminated bezel
- Flush and rocker style button options



METH/DGPB



PUSH TIMER HOUR

Programmable digital hour timer to turn off lighting automatically after a pre-set period

- Programmable between ¼ hour and 7½ hour, in ¼ hour steps
- Simple 3-step timer interval setting
- Override function to prevent lighting turning off automatically
- Advanced warning option dims to 50% for 5 minutes after time out
- Programmable maximum level and off state indicator
- White LED, illuminated bezel
- Flush and rocker style button options

PRODUCT FUNCTIONS

Function	Rotary Dimmer	Digital Rotary Dimmer / Switch	Push Dimmer / Switch	Push Switch	Timer Minute	Timer Hour
Product Code	Dimmer	Dimmer	Dimmer	Switch	Timer	Timer
Indicator	MEDM	MEDM/DGRT	MEDM/DGPB	MESW/DGPB	METM/DGPB	METH/DGPB
Rotary Dial	Green LED	White LED's	White LED's	White LED's	White LED's	White LED's
Integrated Tap ON/OFF switch	✓	✓	–	–	–	–
Programmable	–	✓	✓	✓	✓	✓
Programmable Minimum	–	✓	✓	✓	✓	✓
Programmable Maximum	–	✓	✓	–	✓	✓
Programmable Kick Start function	–	✓	✓	✓	✓	✓
Programmable off state indicator	–	✓	✓	✓	✓	✓
Programmable Timeout period	–	–	–	–	✓	✓
Kids Bedroom mode – double tap to dim down over 30 minutes	–	✓	✓	–	–	–
Wake up mode – double tap to dim up over 30 minutes	–	✓	✓	–	–	–
Mechanically set max or min	✓	–	–	–	–	–

*only maximum or minimum can be set

SPECIFICATIONS

Function	Product Code	Electrical connections	Nominal Line Voltage	Line Voltage Frequency	Load Brightness Range	Rated Load	Minimum Load	Mounting	Timer range	Timer increment	Timeout Default
2-wire (Active and Load, no Neutral required)	220-240Vac	50Hz Nominal (47 - 53Hz)	0% to 100% (typical for LED loads)	Refer compatible load label	1W	Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–
50Hz Nominal (47 - 53Hz)	0% to 100% (typical for LED loads)	Refer compatible load label	1W	Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–	–	–
2-wire (Active and Load, no Neutral required)	220-240Vac	50Hz Nominal (47 - 53Hz)	0% to 100% (typical for LED loads)	Refer compatible load label	1W	Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–
50Hz Nominal (47 - 53Hz)	0% to 100% (typical for LED loads)	Refer compatible load label	1W	Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–	–	–
Refer compatible load label	1W	Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–	–	–	–	–
Standard Australian wall plate aperture	1 to 30 minutes	¼hr to 7½hrs	–	–	–	–	–	–	–	–	–
1 to 30 minutes	¼hr to 7½hrs	–	–	–	–	–	–	–	–	–	–
¼hr to 7½hrs	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–

LEDsmart™ Range


COMPATIBLE LOAD TYPES

Load Symbol	Load Type	Maximum Load	Notes
	LED Lamps	400W	Maximum permitted number of drivers is 400W divided by driver name plate power rating. Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power - factor result when connected to switch.
	Electronic Transformers	400W	
	Standard Iron-Core Transformers	250W	Due to variety of transformer designs, maximum LV lighting load is also dependent on transformer efficiency.
	Toroidal Iron-Core Transformers	300W	
	Incandescent	350W	
	CFLs	400W	Due to variety of CFL designs, maximum number is make/model dependant.

Incompatible Load types. Ceiling Sweep Fans and Exhaust fans

DIMENSIONS

Fits most Australian wall switch plate apertures

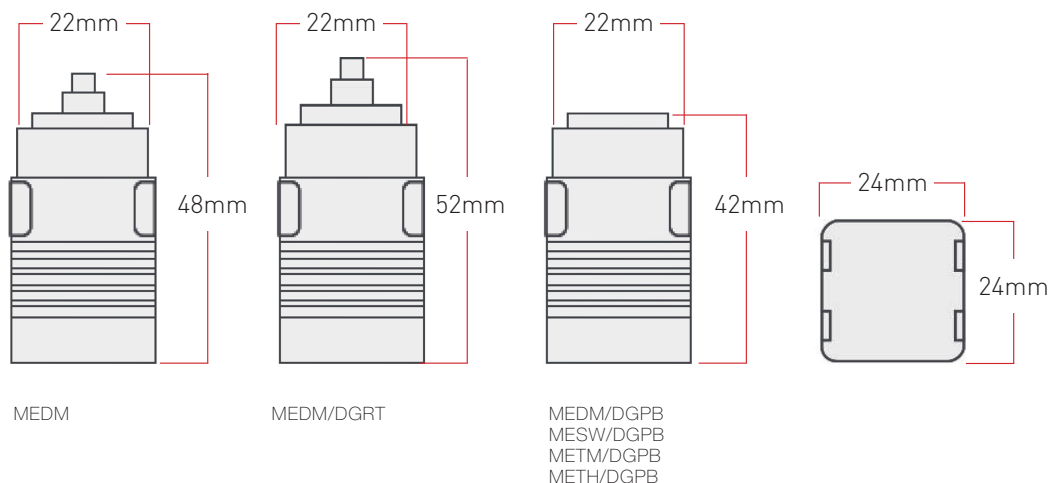

COPYRIGHT. ©This document is copyright to Gerard Lighting Pty Ltd. Except as permitted under relevant law, no part of this user and installation guide may be reproduced by any process without written permission of and acknowledgement to Gerard Lighting. DISCLAIMER. Gerard Lighting Pty Ltd reserves the right to alter the specifications, designs or other features of any items and to discontinue any items at any time without notice and without liability. While every effort is made to ensure that all information in this user and installation guide is correct, no warranty of accuracy is given and Gerard Lighting shall not be liable for any error. TRADEMARKS. The identified trademarks and copyrights are the property of Gerard Lighting Pty Ltd unless otherwise noted.