


Snap-fit Skirting Duct Lid


At a glance ...

- Size: 127x35mm
- Cover: "Snap-Fit" Aluminium Engages at top.
- Outlets: Standard Size "Centre Mount" format
- Stock Colours: Grey, Black, White, Stone Beige
- Suitable for: Category 6 Cabling

- Based on the "Centre Mount 125" range the "Snap Fit" system utilises an extruded aluminium cover which "Snap-Fits" into position to provide extra protection and streamline appearance. Ideally suited for use in schools, colleges and universities.
- Suitable for Category 6 data cabling.
- The ECD "Snap-fit" system eliminates the need to screw fix covers and can be mounted horizontally or vertically.
- The "Snap-fit" covers engage at the top edge of the duct, avoiding the problem of floor coverings obstructing the fitting or removal of the cover.
- Duct and covers are powder coat finished. Standard colours are Black, White, APO Grey and Stone Beige. Over 50 non-standard colours are available.
- This product has been examined in accordance with AS 3000 and conforms to A.C.A requirements.

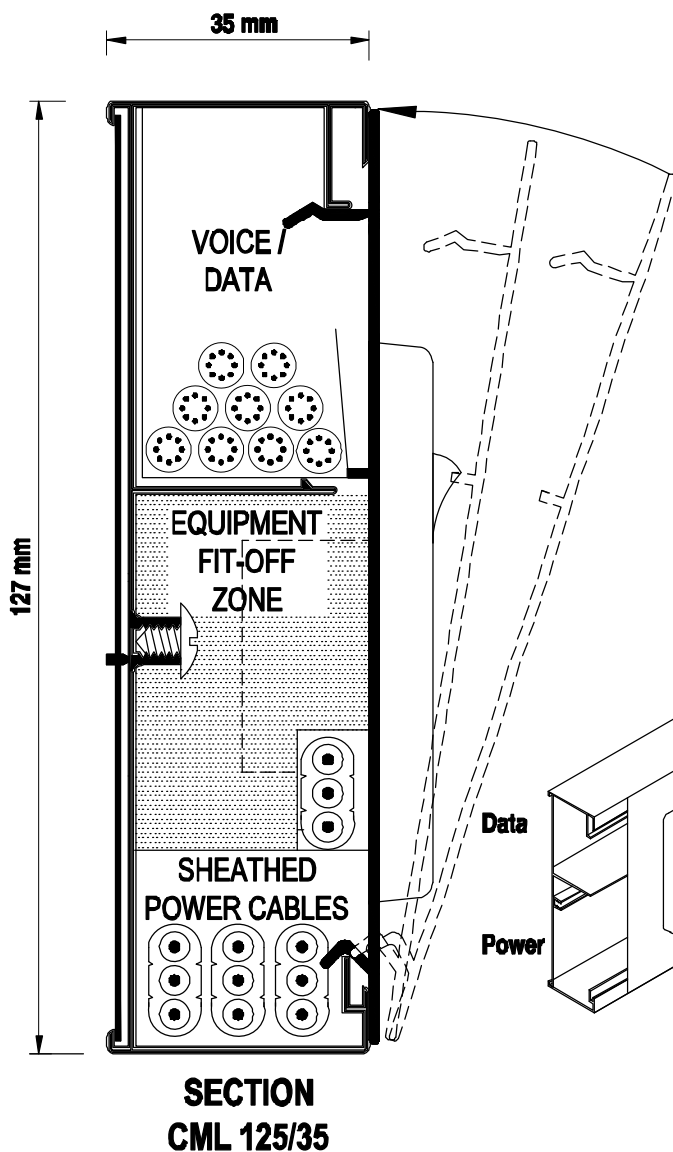

"Easy as ECD"

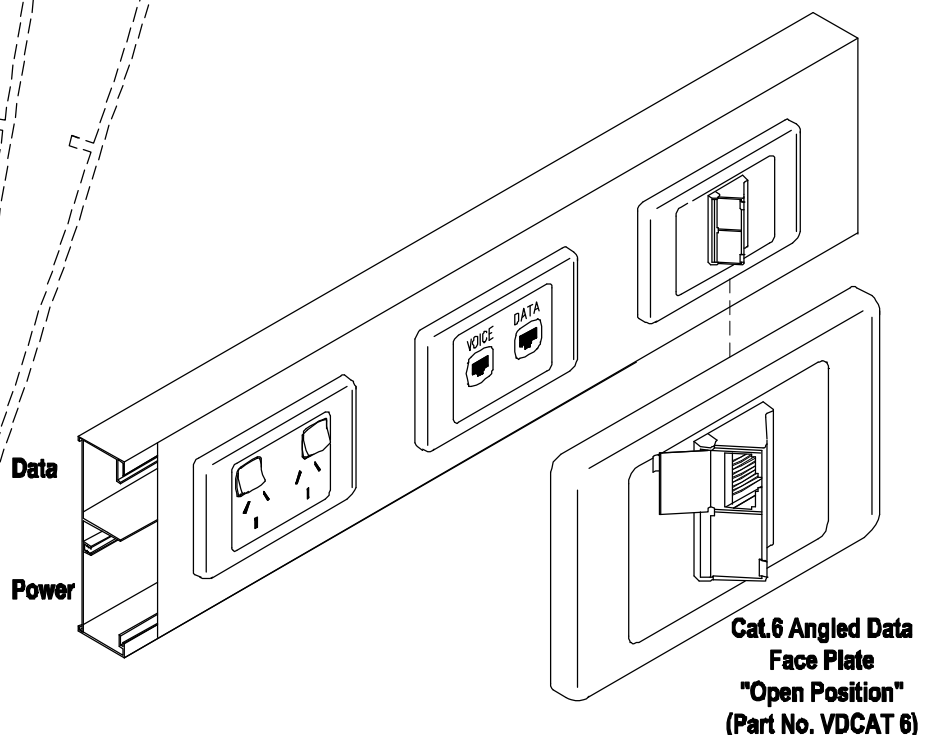

ECD
ESTABLISHED 1979

Electric Cable Duct Systems P/L


8 Clarice Road, Box Hill South, Victoria. 3128 Australia

Ph. (03) 9890 6646

Fax. (03) 9899 5042

www.ecd.net.au

Copyright © 2007 Electric Cable Duct Systems Pty. Ltd. ABN 80005544105

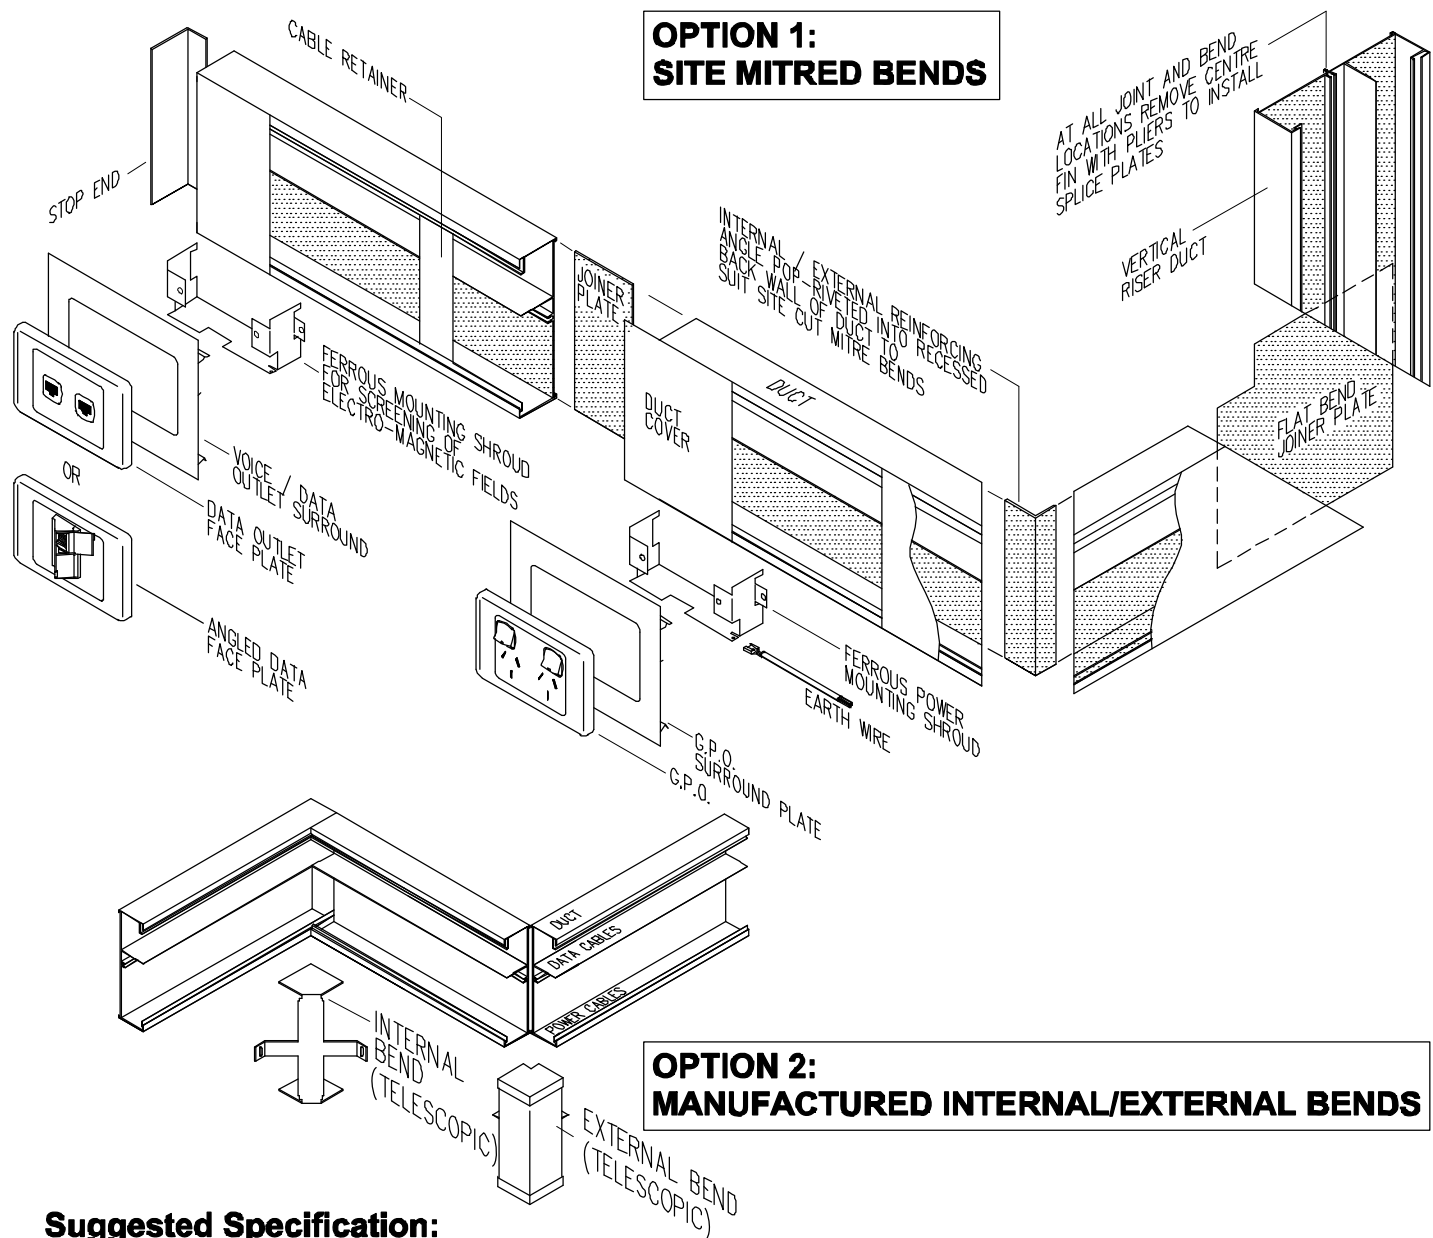

Suggested Specification:

- The contractor shall allow to supply and install "Electric Cable Duct Systems P/L " CML 125/35 "Centre Mount" skirting duct with "Snap-Fit" extruded aluminium cover (127x35mm) surface mounted or as otherwise nominated and described below.
- The system will reflect the integrated voice/data cabling requirements of Category 5 & 6 and have ferrous mounting shrouds for both power and voice/data outlets. Outlets shall be standard size Clipsal, HPM or PDL Type.
- The body of the duct shall be extruded aluminium pre-treated and powder coated to a standard colour (White, APO Grey, Stone, Beige or Black) or as nominated by the architect. The duct cover shall be extruded aluminium pre-treated, powder coated to match.
- The system shall be earthed in accordance with AS 3000 wiring rules and conform to A.C.A requirements.
- Bends shall be site mitred to fine tolerances with concealed reinforcing angles riveted in position or alternatively manufactured internal/external bends. Adjacent lengths of duct body shall be splice joined with slide in joiner plates. Slide in stop ends shall be fitted where necessary.
- Installation shall be performed by experienced duct installers, generally as described on E.C.D "Recommended Installation Procedure" leaflet.

Parts List

Description

Duct Body - 3m lengths
 Duct Cover - 3m lengths
 GPO Mounting Kit only (No GPO)
 Voice/Data Mounting Kit only (No bakelite supplied)
 Internal Bend
 External Bend
 Reinforcing Angle (Site mitred bends)
 Stop End
 Flat Bend Plate
 Riser to Skirting Tee
 Angled Data Face Plate

Part No.

CML 125/35
 CML 125 C
 CML 125/35 K
 CML 125/35 VDK
 CML 125/35 IB
 CML 125/35 EB
 CML 125 RA
 CML 125/35 SE
 CML 125 FB
 CML 125/35 RT
 VDCAT 6

Colour

Nominate Colour
 Nominate Colour
 Nominate Colour
 Nominate Colour
 Nominate Colour
 Nominate Colour
 N/A
 Nominate Colour
 N/A
 Nominate Colour
 Nominate Colour