



MERCURY

Mercury Emergency Exit, 24m

- Single and double-sided decals
- Fully compliant (AS/NZS 2293)
- IP65 weatherproof case available but not included
- Wall, ceiling and chain mounting - rod mounting with rod mount kit
- Long life electronics
- 6 years design life at max. ambient temperature
- High quality lithium battery (LiFePO4) and smart charger
- Standalone (SPU)
- SafeTest - automated self-testing (AS2293/IEC62034)



ORDERING INFORMATION

Order code	11258
Description	Mercury Core emergency Exit
Driver Type	Fixed output
Item Code	EV-MERCURY-CORE

MECHANICAL

IP Rating	IP20
Fitting Colour	White
Body Material	Polycarbonate
Diffuser Material	Polycarbonate
Installation Type	Wall or Ceiling

ELECTRICAL

Working Temp Range	0 to 40 °C
Input Frequency	50 Hz
Maximum Wattage	3.5 W
Input voltage	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

Standby Power	2.2 W
---------------	-------

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

DRIVER

Driver Type	Fixed output
Driver Included	Yes
Integrated Driver	Yes
Wiring Type	Re-wireable terminal block (3 pin)

EMERGENCY (EM SUFFIX)

Emergency Mode	Maintained
Emergency Classification	C0:D3.2,C90:D3.2
Emergency Output Power	600 mW
Replacement Battery Code	12425
Emergency Duration	90 mins
Emergency Lumen Output	40 lm
Viewing Distance	24 m
Decal Size	300 x 150 mm
Emergency Control	Ektor SafeTest (Automatic self-test)

COMPLIANCE

Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 AS/NZS 2293.3
-----------	--



WARRANTY


Warranty	5 Year Warranty, First 2 Years Onsite
The total warranty period is shown above. Where an on-site period is listed, the first years are covered on-site, with return-to-base coverage for the remainder. For full warranty details and claim instructions, please refer to our Warranty page.	

DIMENSIONS

Product Height	211 mm
Product Length	326 mm
Product Width	80 mm


LINE DRAWINGS

EV/MERCURY/BASIC

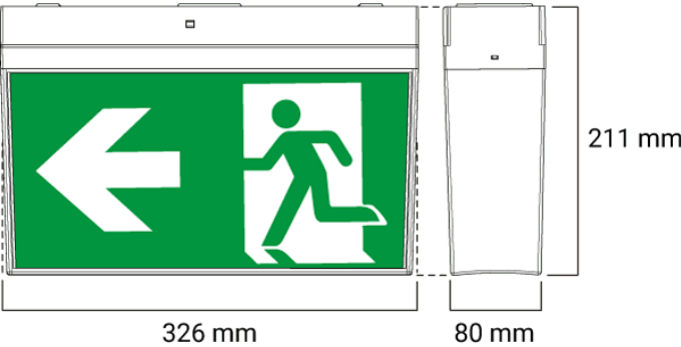

PHOTOMETRICS

EV/MERCURY/BASIC

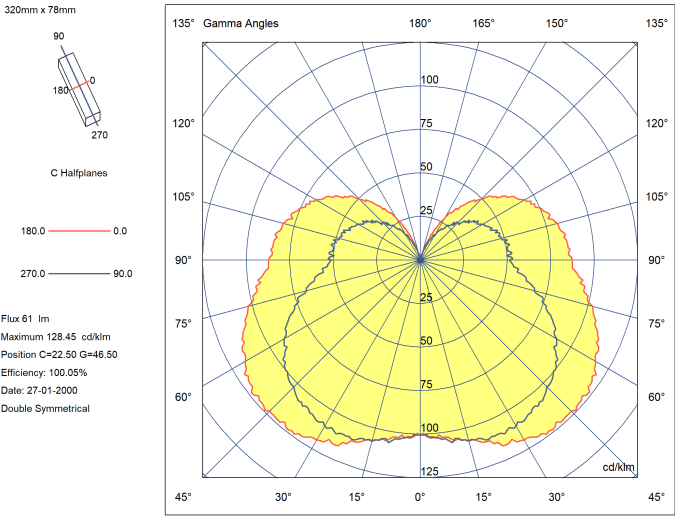

ACCESSORIES

ORDER CODE	ITEM CODE	DESCRIPTION
------------	-----------	-------------



01915	EV-CANTILEVER	Cantilever bracket to suit 3135- 3137- 11258 & 3131
11290	EV-MERCURY-BASIC-DP	Mercury Basic decal pack
03922	EV-MERCURY-CASE	Weatherproof Case for Mercury
11220	EV-MERCURY-CD-1	Mercury custom decal to suit 11258 and 3135 - 1pc
11216	EV-MERCURY-CD-2	Mercury Clear Decal to suit 11258 and 3135 - 2pk
12934	EV-MERCURY-DP-USD	Mercury Basic Decal Pack - Upside down white & green 3 x decals (left- right & straight)
03911	EV-MERCURY-WIREGUARD-CEILING	Ceiling mounted only Wire guard
05301	EV-MERCURY-WIREGUARD-WALL	Wall mounted only Wire guard
02004	EV-RODMOUNT-BLK	Rodmount Brackets only for roof and luminaire body - Black (Rod size -25mm)
01990	EV-RODMOUNT-WHT	Rodmount Brackets only for roof and luminaire body - White (Rod size 25mm)