


## TECHNICAL DATA – GREEN-LITE 32 MAINTAINED

PRODUCT CODE	GL32CWMEPNEM
VOLTAGE	220-240V 50 Hz
TUBE TYPE	T9 32 Watt Tri Phosphor Circular Fluorescent (FC12T9) 4000°K
BALLAST	Mackwell D123/AU+ Electronic Ballast/Inverter
BATTERY BACKUP	NiCad 4 'C' cell 4.8V 2.5Ah
WIRING	All wiring PVC single core (V 105°c)
TERMINAL BLOCK	3 Pole UV Stabilized
EARTH CONNECTION	3/16" bolt with brass / wire connector cap
DIFFUSER	Plexiglas® Opal Cast Acrylic
BACK PLATE	Aluminium – Powder Coated
CLIPS	Zinc plated spring steel
PLUG	UV stabilized G10Q 4 pin plug

## VARIATIONS / OPTIONS

TUBE COLOUR	Twilight 3000°K / Hi-Fi 5000°K
DIFFUSER	Satin Marble
DIMENSIONS	

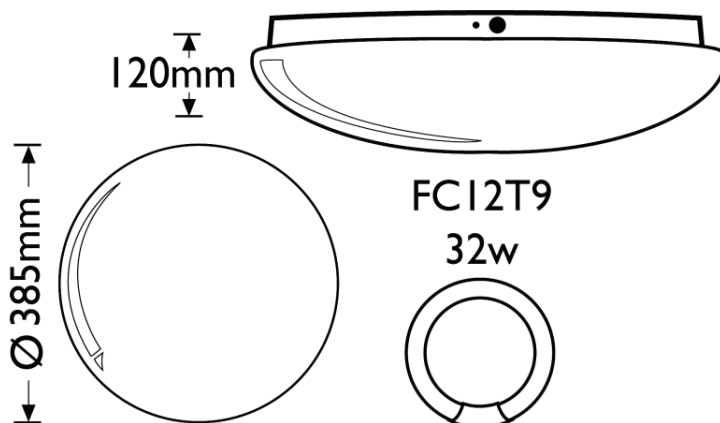

## INSTALLATION

Installation is to be performed by a Licensed Electrical Contractor. Fitting is suitable for centre mount directly to conduit box.

Ensure that rubber bands and foam protection on tube are removed. To help prevent entry of insects utilise silicone sealant to seal any holes not used in installation, including 240v supply entry port. Replace cap over terminal block.

## CARE OF DIFFUSER

To clean use warm soapy water and cloth then chamois dry.

To remove scratches on outside surface use brasso™, or a fine abrasive such as toothpaste.

## REPLACEMENT PARTS

<b>TUBE</b>	FC12T9 Tri-Phosphor Twi-Lite 3000°K or Hi-Fi 5000°K
<b>DIFFUSER</b>	DFGL32
<b>BATTERY PACK</b>	BS254BP 4C 4.8V 2.5Ah NiCad battery stick
<b>BALLAST</b>	Mackwell D123/AU+

brasso™ is the registered trademark of Reckitt and Colman Products Ltd