


ELECTRA CABLES

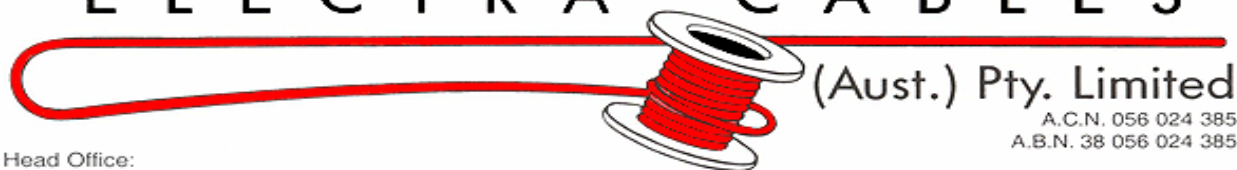

Head Office:
21-23 Pavese Street
Guildford, N.S.W. 2161
P.O. Box 2084
Smithfield, N.S.W. 2164
Phone: (02) 9632 2266
Fax: (02) 9632 8822

Victoria Branch:
22-24 Kilkenny Court
Dandenong South, Vic. 3175
Phone: (03) 9769 2811
Fax: (03) 9769 2425

Queensland Branch:
Unit 2-3, 52 Fulcrum Street
Richlands, Qld. 4077
Phone: (07) 3375 6277
Fax: (07) 3375 6299

Marine Cable

Application: For use in marine situations where tinned copper is used because it is resistant to corrosion and therefore outlasts plain copper cables.

Conductor: Tinned annealed copper wire (AS1125)

Insulation: PVC V75

Sheath: PVC V75

Voltage: 100V DC or 32V AC

Standard: AS/NZS3808

Pack Length: 50m, 100m

CAUTION

Extra Low Voltage – Should NOT be connected to mains power supply

Typical Features:

Electra Cables Part No.	Nom. area mm ²	Nom. O/D. mm	Stranding No./mm	Insulation Thickness mm	Core Colour	Sheath Colour	Amp Rating	Maximum Resistance at 20°C Ω/Km
Single Core								
MAR4	1.85	3.2	26/0.3	0.6	-	Red, Black	15	10.4
MAR6	4.65	4.3	37/0.4	0.8	-	Red, Black	50	4.1
Battery & Starter								
MAR2BS	33	12.0	460/0.3	1.7	-	Red, Black	120	0.58
MAR3BS	23	10.5	325/0.3	1.6	-	Red, Black	100	0.81
MAR8BS	7	5.6	100/0.3	0.9	-	Red, Black	45	2.36
Twin Sheath								
MAR321	1.07	6.4x3.6	2x16/0.3	0.6	Red, Black	White	10	16.5
MAR421	1.85	8.2x4.6	2x26/0.3	0.6	Red, Black	White	15	10.1
MAR621	4.65	10x6.0	2x37/0.4	0.8	Red, Black	White	50	4
Figure 80.6								
MAR32	1.13	2.7x5.5	2x16/0.3	0.6	-	Red, Black	6	16.5

Note: Other types or other lengths of the above cables can be manufactured according to customers' specifications.