


- High performance, economy flush metal downlight.

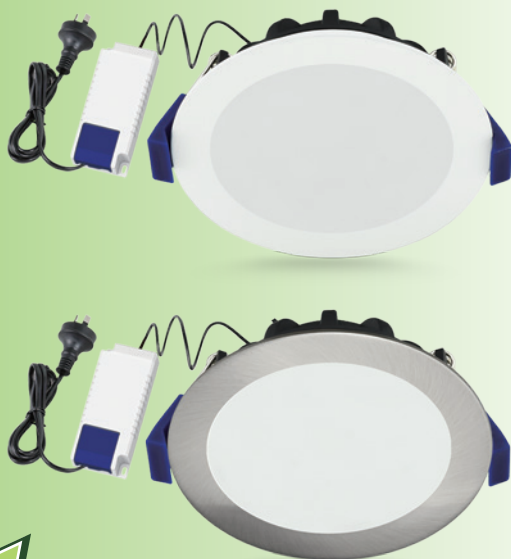

**New!**

### FEATURES

- Aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- Highly transparent opal polycarbonate diffuser
- IC-F and IC-4 Rating. May be installed under ceiling insulation

### DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

### INCLUDES

- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

### APPLICATIONS

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

### WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	DISTRIBUTION	DIMENSIONS(mm)
		 leading and trailing edge		

Part No.	Voltage	Watt.	PF	CCT.	Ra	Lumen	Beam Angle	Lifetime L70B50	Fitting Colour
172021C	220-240V	11W	0.9	3000K	≥80	850lm	110°	35000h	White
172022C	220-240V	11W	0.9	4000K	≥80	900lm	110°	35000h	White
172073C	220-240V	11W	0.9	5000K	≥80	900lm	110°	35000h	White
172023C	220-240V	11W	0.9	3000K	≥80	850lm	110°	35000h	Satin Chrome
172024C	220-240V	11W	0.9	4000K	≥80	900lm	110°	35000h	Satin Chrome
172075C	220-240V	11W	0.9	5000K	≥80	900lm	110°	35000h	Satin Chrome

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172021C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172022C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172073C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172023C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172024C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172075C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ

[1] Operating Frequency=50/60Hz; [2] Switch Times≥20000

[3] This fitting is IP54 only once installed; [4] For dimming compatibility please see page 85

