


- Tri-colour, high efficiency panel.

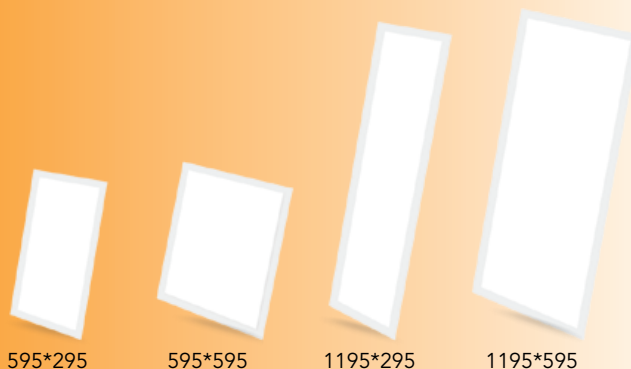

595\*295

595\*595

1195\*295

1195\*595



Tri-colour

### FEATURES

- Three selectable colour temperatures
- Screwless design
- Extruded aluminium frame
- Powder coated finish
- Edge lit
- 4000K or 6500K: SDCM≤4

### INCLUDES

- High efficiency LED panel light
- Constant current LED driver
- 1.2 m flex and plug

### INSTALLATION OPTIONS

- Standard metric T-bar ceiling recessed installation
- Suspended (Suspension kit is required)
- Recessed plaster ceiling installation (Plaster frame is required)
- Surface mounting installation (Surfaced mounted frame is required)

### APPLICATIONS

- Offices and conference rooms and schools and retail

### WARRANTY

- Five years (subject to terms and conditions)

| CERTIFICATION | IP RATING | DIMMABLE | SDCM | Ra | DISTRIBUTION | DIMENSIONS(mm) |
|---------------|-----------|----------|------|----|--------------|----------------|
|               |           |          |      |    |              |                |

| Part No. | Order Code | Voltage  | Watt. | PF  | Color Temp.     | Lumens           | Beam Angle | Lifetime L70B50 | Size(L*W*H) mm | Net Weight (kg) |
|----------|------------|----------|-------|-----|-----------------|------------------|------------|-----------------|----------------|-----------------|
| 221000   | 221000     | 220-240V | 17W   | 0.9 | 4000/5000/6500K | 1600/1700/1600lm | 110°       | 50000h          | 595*295*15     | 1.17            |
| 221001   | 221001     | 220-240V | 32W   | 0.9 | 4000/5000/6500K | 3200/3400/3200lm | 110°       | 50000h          | 595*595*15     | 1.95            |
| 221002   | 221002     | 220-240V | 32W   | 0.9 | 4000/5000/6500K | 3200/3400/3200lm | 110°       | 50000h          | 1195*295*15    | 2.05            |
| 221003   | 221003     | 220-240V | 50W   | 0.9 | 4000/5000/6500K | 5000/5100/5000lm | 110°       | 50000h          | 1195*595*15    | 4.31            |

[1] Operating Frequency=50/60Hz;

[2] Operating Temperature:-20 °C~+40 °C ;

[3] Triac dimmable, 0-10V dimmable, DALI dimmable and flicker-free options are available on request