



Beam N DUAL GLASS Solar Panel

440-450W

Black Profile (182mm)


Mono PERC Half Cell Module

ENSP54NDGT2S440BL ENSP54NDGT2S450BL

ENSP54NDGT2S445BL



Built using Mono-crystalline PERC technology, the Energizer® Solar Panels range combine two of the best technologies in the market.



Dual Glass Construction

- Panel Frame
- Front Glass Panel
- Solar Cells
- Rear Glass Panel



Dual glass technology



Lower operating temperatures



Improved fire & water resistance





Improved durability with no extra weight



Quality controlled by artificial intelligence



Positive power tolerance of 0~+5W

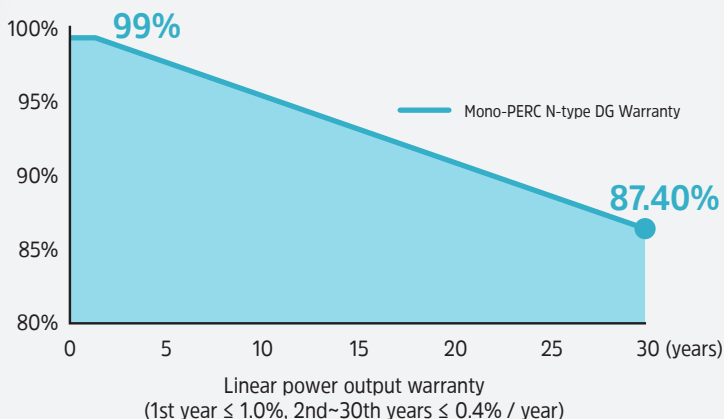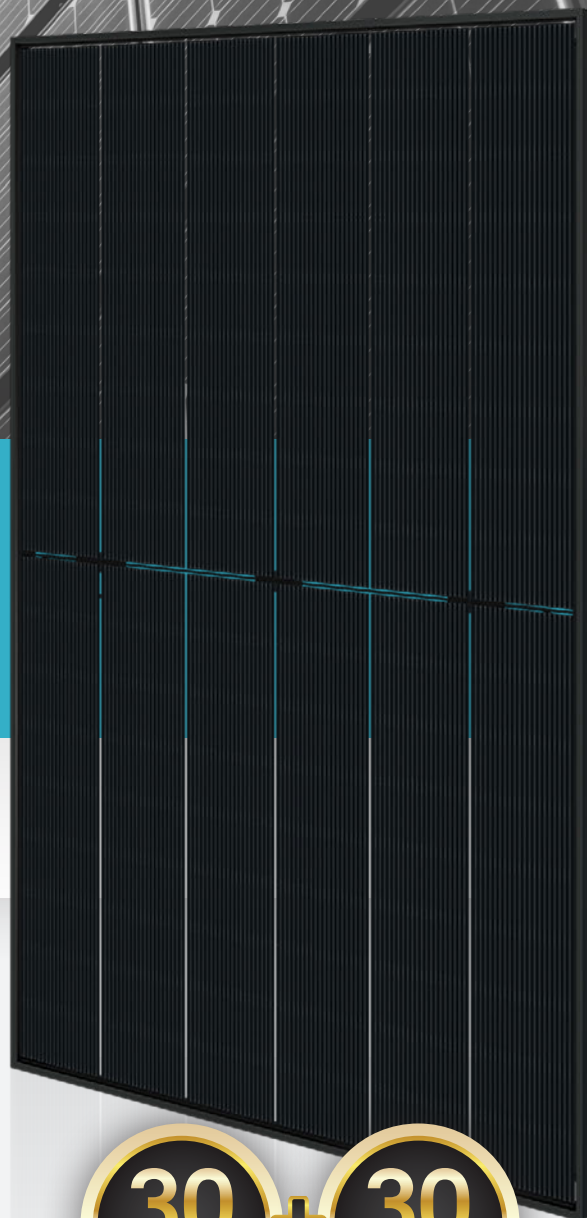

hello@energizersolar.com energizersolar.com

Electrical Specifications

STC rated output (P_{mpp})	440 Wp	445 Wp	450 Wp
Rated voltage (V_{mpp}) at STC	33.05 V	33.22 V	33.39 V
Rated current (I_{mpp}) at STC	13.31 A	13.40 A	13.48 A
Open circuit voltage (V_{oc}) at STC	39.00 V	39.20 V	39.40 V
Short circuit current (I_{sc}) at STC	14.10 A	14.19 A	14.28 A
Module efficiency	22.0%	22.3%	22.5%
Rated output (P_{mpp}) at NMOT	330.9 Wp	334.6 Wp	338.4 Wp
Rated voltage (V_{mpp}) at NMOT	31.11 V	31.27 V	31.43 V
Rated current (I_{mpp}) at NMOT	10.64 A	10.70 A	10.77 A
Open circuit voltage (V_{oc}) at NMOT	37.04 V	37.23 V	37.42 V
Short circuit current (I_{sc}) at NMOT	11.38 A	11.46 A	11.54 A
Temperature coefficient (P_{mpp})	- 0.29%/°C		
Temperature coefficient (I_{sc})	+ 0.043%/°C		
Temperature coefficient (V_{oc})	- 0.25%/°C		
Nominal module operating temperature (NMOT)	41±2°C		
Maximum system voltage (IEC/UL)	1500V _{DC}		
Number of diodes	3		
Junction box IP rating	IP 68		
Maximum series fuse rating	30 A		

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

Name plate tolerances: P_{max} +/-3.5%, V_{oc} +/-3.5%, I_{sc} +/-5%

Electrical Specifications (Integrated power)

Pmpp Gain	Pmpp / Wp	Vmpp / V	Impp / A	Voc / V	Isc / A
5%	462	33.05	13.98	39.00	14.81
10%	484	33.05	14.64	39.00	15.51
15%	506	33.05	15.31	39.00	16.22
20%	528	33.05	15.98	39.00	16.92
25%	550	33.05	16.64	39.00	17.63

Other Specifications

Outer dimensions (L x W x H)	1762 x 1134 x 30 mm
Cell type	N type Mono-crystalline
No. of cells	108 (6*18)
Frame technology	Black Aluminum frame
Front glass thickness	1.6+1.6 mm
Cable length (IEC/UL)	Portrait: (+) 350mm, (-) 250mm
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	PV-HCB40 (Astronergy) or PV-KST4-EVO2/xy-UR, PVKBT4-EVO2/xy (Stäubli)
Module weight	21.5 kg
Packing unit	36 pcs / box
Weight of packing unit (40ft container)	820 kg
Modules per 40ft container	936 pcs
Fire Class Rating	Class A
Country of Manufacturer	China

Curve

