

ORDERING INFORMATION

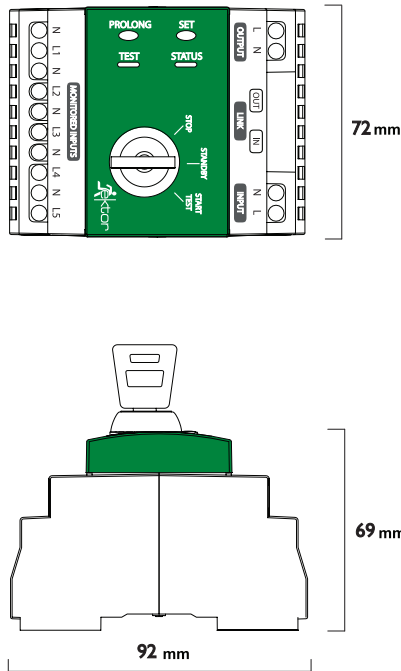
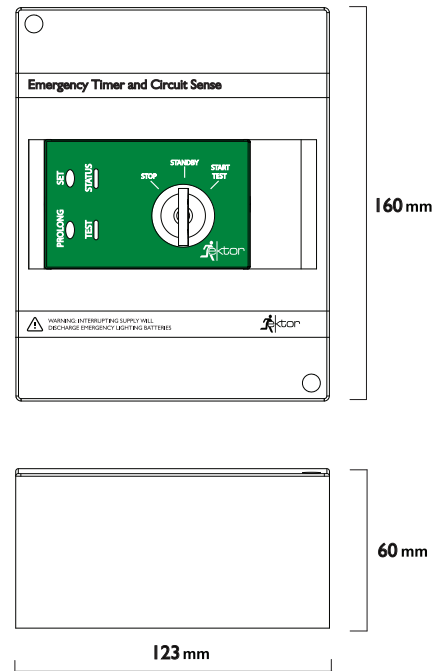
CODE	DESCRIPTION	PRODUCT NUMBER	CARTON QTY.	WEIGHT (NET/ GROSS)
2002	Emergency Test Switch	9336462020029	20	4 Kg / 6.1 Kg
2003	Emergency Test Switch with DIN Enclosure	9336462020036	20	-

OPERATIONAL INFORMATION
GENERAL

Voltage (V)	~220-240V	Wiring	6mm terminals	Relay Type	Non-latching
Frequency (Hz)	50 / 60	IP Rating	IP 20	Relay Load	2A 240V~ maximum
Max. Ambient Temp.	50°C	Test Duration	90 / 120 min	Relay Connection	Screw terminal for 1 to 4mm ² cable
Class	2	Mounting Type	(2002) DIN Rail (35mm) (2003) Field mounted		
Total Power Consumption	2.3 W				

CONSTRUCTION AND DIMENSIONS
BODY PC

NOTE: For more information on the chemical resistance of our polycarbonate, please see the technical downloads page at ektor.com.au

EMERGENCY TEST SWITCH

EMERGENCY TEST SWITCH WITH DIN ENCLOSURE

ACCESSORIES AND SPARE PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
2002	Emergency Test Switch	6122	Emergency Test Switch RJ45 Interlink Cable
2003	Emergency Test Switch with DIN Enclosure		

Datasheet is subject to change without notice

 Last updated: **05.February 2016_V1.1**