




GE  
Lighting

### 43494 - Q500PAR56NSP

GE Quartzline® PAR56 - Narrow Spot

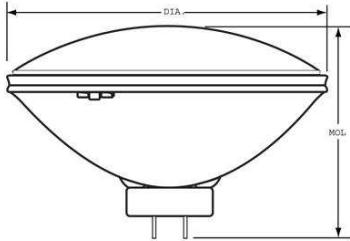

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-6
Rated Life (NOM)	4000.0 h
Primary Application	Narrow Spot

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	32.0 - 10.0 °/13.0 - 50.0 °
Beam Spread - Vertical	8.0 - 50.0 °/15.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	96000.0
Color Temperature (NOM)	2950.0 K
Max. Beam Candlepower (MBCP) (MAX)	96000.0

#### ELECTRICAL CHARACTERISTICS


Wattage (NOM)	500.0
Voltage (NOM)	120.0

#### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.000 in(127.0 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

#### PRODUCT INFORMATION

Product Code	43494
Description	Q500PAR56NSP
Standard Package	Case
Standard Package GTIN	10043168434949
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168434942



#### CAUTIONS & WARNINGS

##### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

##### Warning

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Do not exceed 110% of rated voltage.
  - Do not use lamp if outer glass is scratched or broken.
  - Use in enclosed fixture rated for this product.