





GE  
Lighting

## 43499 - Q1000PAR64/WFL

GE Quartzline® PAR64 - Wide Flood

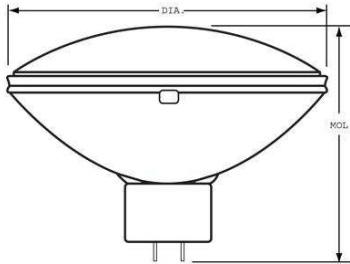

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Do not exceed 110% of rated voltage.
  - Do not use lamp if outer glass is scratched or broken.
  - Use in enclosed fixture rated for this product.

### GENERAL CHARACTERISTICS

|                     |                                      |
|---------------------|--------------------------------------|
| Lamp Type           | Sealed Beam - PAR                    |
| Bulb                | PAR64                                |
| Base                | Extended Mogul End Prong (GX16d EXT) |
| Filament            | CC-6                                 |
| Rated Life (Vert)   | 4000.0 h                             |
| Rated Life (NOM)    | 4000.0 h                             |
| Primary Application | Wide Flood                           |

### PHOTOMETRIC CHARACTERISTICS

|                                       |                             |
|---------------------------------------|-----------------------------|
| Initial Lumens (NOM)                  | 19400.0                     |
| Beam Spread - Horizontal              | 72.0 - 10.0 °/48.0 - 50.0 ° |
| Beam Spread - Vertical                | 24.0 - 50.0 °/45.0 - 10.0 ° |
| Center Beam Candlepower (CBCP) (NOM)  | 33000.0                     |
| Color Temperature (NOM)               | 3000.0 K                    |
| Max. Beam Candlepower (MBCP) (MAX)    | 33000.0                     |
| Nominal Initial Lumens per Watt (NOM) | 19.4                        |

### ELECTRICAL CHARACTERISTICS

|               |        |
|---------------|--------|
| Wattage (NOM) | 1000.0 |
| Voltage (NOM) | 120.0  |

### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 6.000 in(152.4 mm) |
| Bulb Diameter (DIA) (NOM)          | 8.000 in(203.2 mm) |

### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 43499          |
| Description                      | Q1000PAR64/WFL |
| Standard Package                 | Case           |
| Standard Package GTIN            | 10043168434994 |
| Standard Package Quantity        | 6              |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 6              |
| UPC                              | 043168434997   |