

MODEL NUMBER

11-12110-00M


PRODUCT LINE

GO™ Switch 10/20 Series

SPECIFICATIONS

Model	11 Model
Contact Form	SPDT (Form C)
Sensing Range	Extended approx. 9/16" side
Outlet Position	Behind sensing area
Enclosure Material	Standard Enclosure
Area Classification	CSA/FM CI I, Div 2
Wiring Options	Terminal block - M20 conduit
Regional Certification	No regional certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

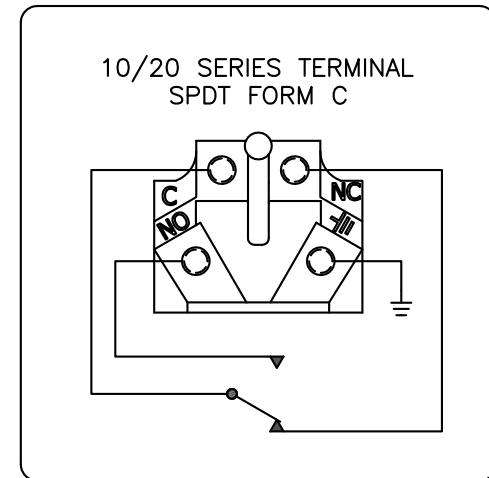

Current as of September 1, 2020 – Subject to change without notice.

NAMEPLATE



aps apsindustrial.com.au

SALES 1300 309 303

CONNECT WITH US [f](#) [in](#) [t](#) [v](#)



CL I DIV 2, GRPS A,B,C,D, CL II DIV 1, GRPS E,F,G, CL III
 T₁/T₂: 50°C ≤ T_a ≤ 60°C/98°C
 ELECTRICAL RATING: 120VAC/10A, 240VAC/3A RESISTIVE, 480VAC/240VDC MAX
 LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE
 CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.

Model #: _____ Serial #: _____

TOPWORX™

3300 Fern Valley Road
 Louisville, KY 40213