

## COSWV1G COSWV2G COSWV3G COSWV4G COSWV5G COSWV6G COSWM

### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

## Cougar Range of Switch Plates

- Switches are rated 250V 16A and approved to AS/NZS3133
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling - Switches are two way with looping terminal and suit 3 x 1.5mm<sup>2</sup> cabling - 3.8mm terminal bores.
- Combination head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- The COSWM clip in switch mechanism is able to be used and clip into other Trader and competitor switch plate ranges
- Colour: White
- Typical example of size seen below:

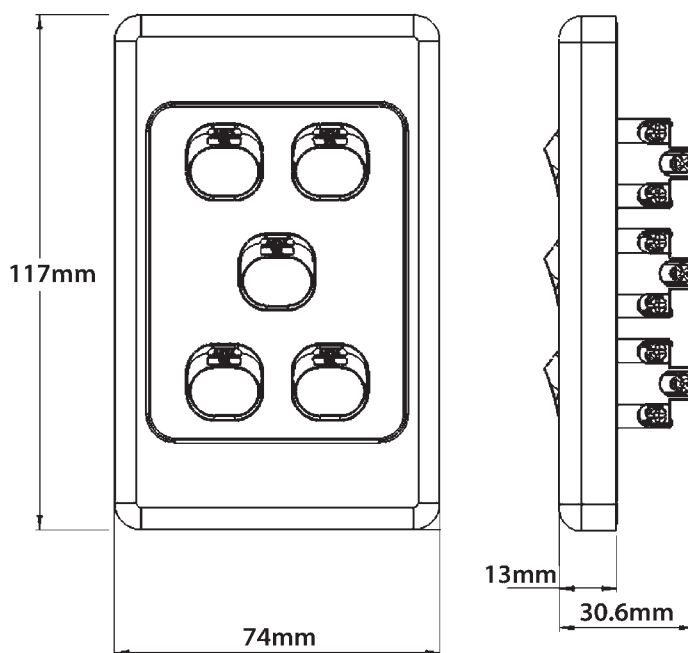

Catalogue Number	Description
COSW1G	Switch Plate 250V/16A 1 Gang
COSW2G	Switch Plate 250V/16A 2 Gang
COSW3G	Switch Plate 250V/16A 3 Gang
COSW4G	Switch Plate 250V/16A 4 Gang
COSW5G	Switch Plate 250V/16A 5 Gang
COSW6G	Switch Plate 250V/16A 6 Gang
COSWM	Switch Mechanism 250V/16A

### Certification Number:

COSWV1G-COSWV6G: SAA131831EA

This certification number is specifically applicable to the following codes:

COSWV1G,W / COSWV2G,W / COSWV3G,W / COSWV4G,W / COSWV5G,W / COSWV6G,W / COSWM, W  
(where "W" is reference to the colour white)

### GSM Electrical (Australia) Pty Ltd

Level 2/142-144 Fullarton Road, ROSE PARK SA 5067

p: 1300 301 838 f: 1300 301 778 e: service@gsm.com.au

www.gsm.com.au



Data Specification Sheet  
May 2016

