


# STAX<sup>ECO</sup>

STAX20W4K  
 SAP CODE: 2002128

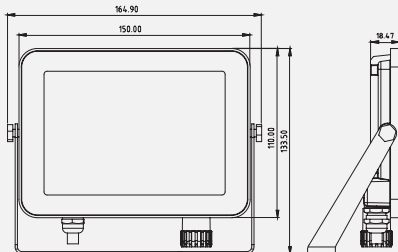


## A versatile and efficient LED floodlight

The STAX ECO is the next generation in our versatile and efficient LED floodlight range. With a range of power from 20W to 200W it is excellent for a wide number of applications. It also has an optional PIR motion sensor for added security.



Photometric Diagram



Unit: cd  
 - C0/180 115.5deg  
 - C90/270 115.3deg

### KEY INFORMATION

Watts	20W
Input Power	20W
Lumen Output (p/metre)	2075lm
Install	Surface Mount
Dimming Options	Non-Dimmable
Fitting Colour	Matte Black
Warranty	3 years
IP Rating	IP66
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approval	IPART LCP 18.8

### PHOTOMETRIC

Efficacy	104lm/W
LED	SMD
CCT	4000K
Beam Angle	110°

### ELECTRICAL

Driver	Integral (DOB)
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	-
Power Factor	>0.9
LED Input Current (nominal)	-
Useful life @Ta25° (L70)	-

### CONSTRUCTION

SCDM	<5
Housing	Die-cast Aluminum
Optics	Glass Lens
Adjustable Angle	N/A
Fixings/Hardware	Mounting bracket
Connection Type	0.6m Flex
Total Weight	0.6kg
Dimensions	133.5x165x19mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

### ACCESSORIES



STAX-SENSOR



STAX90D-BRKT-S