




VISTA

VISTA40W12-TRI-SS

SAP CODE: 2001064

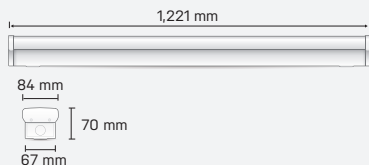

1200mm, 40W,
Intellisensor, Tritone,
conventional
appearance LED batten


An LED replacement for conventional battens with Intellisensor for automatic standby dimming and Tritone switchable colour temperature.

Accessories

SUSPENSION KIT; WIREGUARD



Photometric Diagram



Unit: cd
- C0/180 110.0deg
- C90/270 110.0deg

KEY INFORMATION

Lumen Output	4730 / 4700 / 4290lm
Input Power	40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 40.46

PHOTOMETRIC

Efficacy	118 / 117 / 107lm/W
LED	SMD
CCT	4000 / 4700 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	57-20VDC
Power Factor	>0.9
LED Input Current (nominal)	700mA
Useful life @Ta25° (L70)	50,000hr



CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1221x84x70mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP


Intellisensor

Combine daylight & high frequency motion detection in one unit to achieve on/off control

Detection range, hold time, standby time and daylight threshold can be preset.

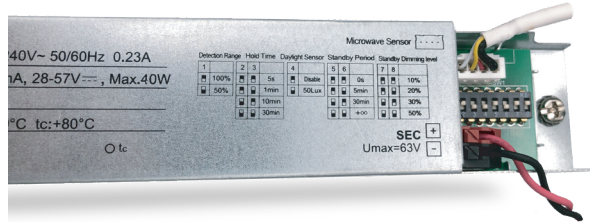

Wall Mount



Ceiling Mount

ELECTRICAL

Load Wattage	Max. 500w
Standby Power	<0.5w
Microwave Frequency	5.8Ghz1
Detection Area	<0.2mW
Detection Sensitivity	15mx16m (DxH)
Hold Time	50% / 100%
Standby Time	0s to 30min +
Standby Dimming Level	10% to 50%
Daylight Threshold	50lux / Disable
Dimensions	125x51x44mm
IP Rating	65

Dip Switch Settings

Detection Range		Hold Time		Daylight Sensor	Standby Period		Standby Dimming lever	
1		2	3	4	5	6	7	8
<input type="checkbox"/>	100%	<input type="checkbox"/>	<input type="checkbox"/> 5s	<input type="checkbox"/> Disable	<input type="checkbox"/>	<input type="checkbox"/> 0s	<input type="checkbox"/>	<input type="checkbox"/> 10%
<input type="checkbox"/>	50%	<input type="checkbox"/>	<input type="checkbox"/> 1min	<input type="checkbox"/> 50Lux	<input type="checkbox"/>	<input type="checkbox"/> 5min	<input type="checkbox"/>	<input type="checkbox"/> 20%
		<input type="checkbox"/>	<input type="checkbox"/> 10min		<input type="checkbox"/>	<input type="checkbox"/> 30min	<input type="checkbox"/>	<input type="checkbox"/> 30%
		<input type="checkbox"/>	<input type="checkbox"/> 30min		<input type="checkbox"/>	<input type="checkbox"/> +∞	<input type="checkbox"/>	<input type="checkbox"/> 50%

- Note:** 1. "0s" = on/off control
 2. "+∞" = bi-level dimming control, fixture never switches off.
 3. Factory default setting: 100%, 5s, Disable, 5min, 10%



on *Dip Switch Colour = White