

## HMSB606020G

**HBASE 600H X 600W X 200D GREY IP66, ASSEMBLED, 4 x 26 DIN HMSB606020G**



### FEATURES

- Compact surface wall-mounting enclosure
- With Din rail insert
- Single door
- 5-mm double-bit lock
- Coated with hardened polyester powder coat, textured 80-120  $\mu$ . with UV protection
- IP66 Rating

### SPECIFICATIONS

Part No.	<b>HMSB606020G</b>
<b>MILD STEEL WALL-MOUNTING ENCLOSURE</b>	
Part No.	MSB606020G
Degree of protection	IP66/NEMA 1,12,4
Resistance to impact	IK10
Ambient temperature range	-25 °C / +40 °C
Maximum operating voltage	1000 V AC
Corrosion resistance	C4-M
Maximum temperature for sealing gasket	80°C
Maximum temperature for polyester paint	125°C
Mounting type	Wall mounting
Mounting plate	2mm galvanised sheet
Colour	RAL7035 grey
Materials	Cold-rolled steel EN10130+A1, Injected polyurethane sealing gasket
Installation	Surface
Type of door	Single plain door
Locking	5-mm double-bit lock
No. of locks	2
No. of hinges	2
Door reinforcement profiles	2
Cable entry	Gland plate at bottom
Sheet thickness Body	1.5mm
Sheet thickness Door	1.5mm
Inside usable space	(Height x Width x Depth) 550x550x179 mm
Wall fixing	(Height x Width) 560x560 mm
Standards	UNE-EN 62208 / UNE-EN 61439-1-3 (as applicable)
Certificates	UL508A / Bureau Veritas




### DIN RAIL INSERT

Part No.	CH6060/1520
No. of rows	4 x 26
Total Modules	104
Dimension	(Height x Width x Depth) 600 X 600 X 150 - 200 mm

## HMSB606020G

## DIMENSIONS

## MSB606020G

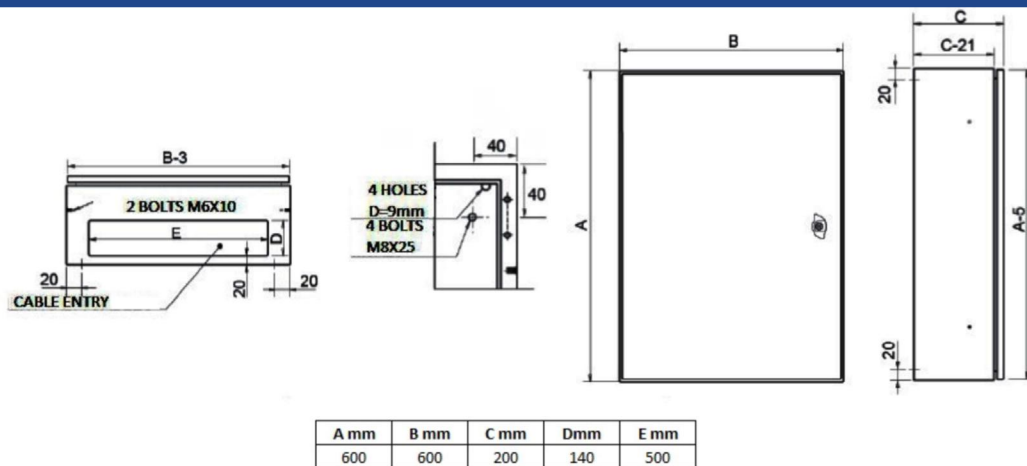

## CH6060 - 1520

