Datasheet

Twin LED Spotlight

CAT NO. **659065LI**





Battery Pack	Liion 12.8V 3.2Ah
Operating Voltage	240V a.c +/- 6% 50 Hz
Operating Mode	Non-maintained
Energy Consumption	5W
Body Constructions	Polycarbonate
Operating Temperature	10°C to 40°C
Lumen Output	2 x 580lm
IP Rating	IP65
IK Rating	IK07
Compliance	AS/NZS2293.3 AS/NZS60598.2.22 📤 山










Twin LED Spotlight

CAT NO. **659065LI**




- Embedded Bluetooth for smart device connectivity.
- Low Power Wide Area Network type of communications utilising the LoRa platform.
- LoRa communication to maximise reliability, coverage and infiltration.
- LED Spotlight for non-maintained emergency lighting applications.
- Ideal for commercial applications such as car parks and sports venues.
- Energy efficient LED lamp technology.
- iSmartTM temperature sensing technology for the LIION battery.
- Electronics designed to lengthen the life of the battery minimizing maintenance costs.
- Environmentally friendly battery.
- Easy to install.
- 5 year warranty.
- Designed and Manufactured in Australia.

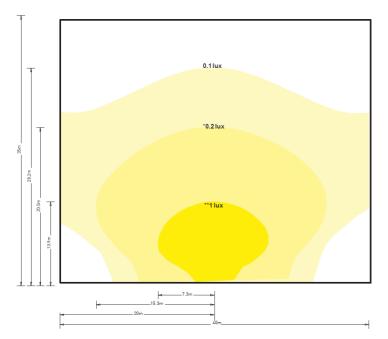



- Luminaire is mounted @5m above floor on one wall
- Spotlights have a 90 degree tilt angle (straight out from fitting)
- A maintenance factor of 1.0 is applied to allluminaires
- Illuminance measurements are at groundlevel
- This design is to be used as a guide only and should not be used for compliance. A dedicated lighting design will need to be done for every application
- *0.2lux corresponding to Australian lighting standards
- **1.0lux corresponding to New Zealand lighting standards





With Wire Guard





Cat No.	Description
659065LI	Twin LED Spotlight IP65 Lithium
Accessory	
682369	Wire Guard - White

Legrand Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.