



Weatherproof LED Exit Sign

CAT NO. 659038/LI, 659039/LI, 659040/LI, 659041/LI, 659042/LI, 659043/LI



| | |
|-----------------------|--|
| Mode of operation | Maintained |
| Supply voltage | 240V a.c. (+/- 6%) 50 Hz |
| Power consumption | 5.4W |
| Battery | Li-ion 6.4V, 1.5Ah |
| Body construction | Polycarbonate |
| Diffuser | Polycarbonate |
| Operating temperature | 10° C to 40° C |
| IP rating | IP65 |
| Impact rating | IK-08 |
| Compliance | AS/NZS 2293 AS/NZS 60598   |



Weatherproof LED Exit Sign



CATNO. 659038/LI, 659039/LI, 659040/LI, 659041/LI, 659042/LI, 659043/LI

| Cat No. | Description |
|------------|-----------------|
| 24m | |
| 659038/LI | WP LED Exit RM |
| 659039/LI | WP LED Exit RML |
| 659040/LI | WP LED Exit RMR |
| 32m | |
| 659041/LI | WP LED Exit RM |
| 659042/LI | WP LED Exit RML |
| 659043/LI | WP LED Exit RMR |

RM = Running man straight RML = Running man left RMR = Running man right

| Accessories | |
|-------------|-------------------------|
| 684690 | Wall bracket for 24m |
| 684691 | Side bracket for 24m |
| 684692 | Ceiling bracket for 24m |

| Classification | |
|----------------|-----------------|
| 24m | CO: E2.5 C90:E2 |
| 32m | CO: E2.5 C90:E2 |

Spacing table:

Maximum Spacing between luminaires 0.2 lux (Australia)

| Mounting Height (m) \ Classification | Classification | | | |
|--------------------------------------|----------------|-----|-----|-----|
| | 2.4 | 2.7 | 3.0 | 3.3 |
| E2.5 | 5.8 | 5.8 | 6.0 | 5.8 |
| E2 | 5.2 | 5.4 | 5.2 | 5.0 |

Maximum Spacing between luminaires 1 lux (NewZealand)

| Mounting Height (m) \ Classification | Classification | | | |
|--------------------------------------|----------------|-----|-----|-----|
| | 2.4 | 2.7 | 3.0 | 3.3 |
| E2.5 | / | / | / | / |
| E2 | / | / | / | / |


- Embedded Bluetooth for smart device connectivity
- Low Power Wide Area Network type of communications utilising the LoRa platform
- LoRa communication to maximise reliability, coverage and infiltration
- iSmart™ temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- Two sizes: 24m and 32m viewing distance
- High resistance polycarbonate ABS clear cover
- Removable gear tray for ease of maintenance and installation
- Large terminal block for ease of connection
- Low cost maintenance
- Designed and manufactured in Australia
- 5 year warranty

Weatherproof LED Exit Sign




CATNO. 659038/LI, 659039/LI, 659040/LI, 659041/LI, 659042/LI, 659043/LI

DIMENSIONS

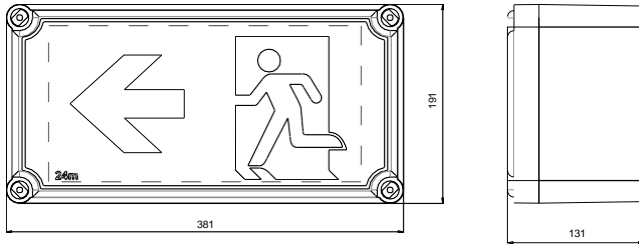


24m Exit

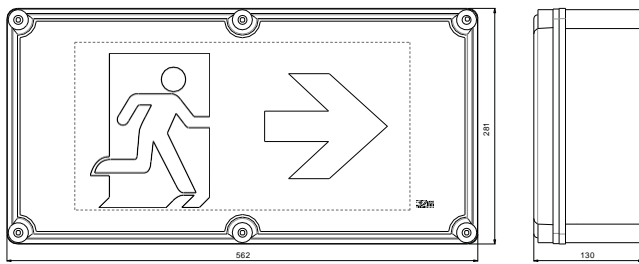


32m Exit








Rear mountingbracket



Side mountingbracket



Ceiling mountingbracket



Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Refer to your group buying office, LegrandSales Representative or Legrand Sales Office for pricing.

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Please note: specifications are subject to change without prior notice.