

CONDUIT SADDLES - 316 STAINLESS STEEL


FEATURES & BENEFITS

- Non-corrosive
- Suitable for marine and submerged applications
- Strength rib for stronger rigidity
- Comprehensive range

SPECIFICATIONS

Material: 316 grade stainless steel
Fixing hole Ø: 6.5mm
Material thickness: Full saddle - 0.8mm
Half saddle - 1.2mm

**316
STAINLESS
STEEL**

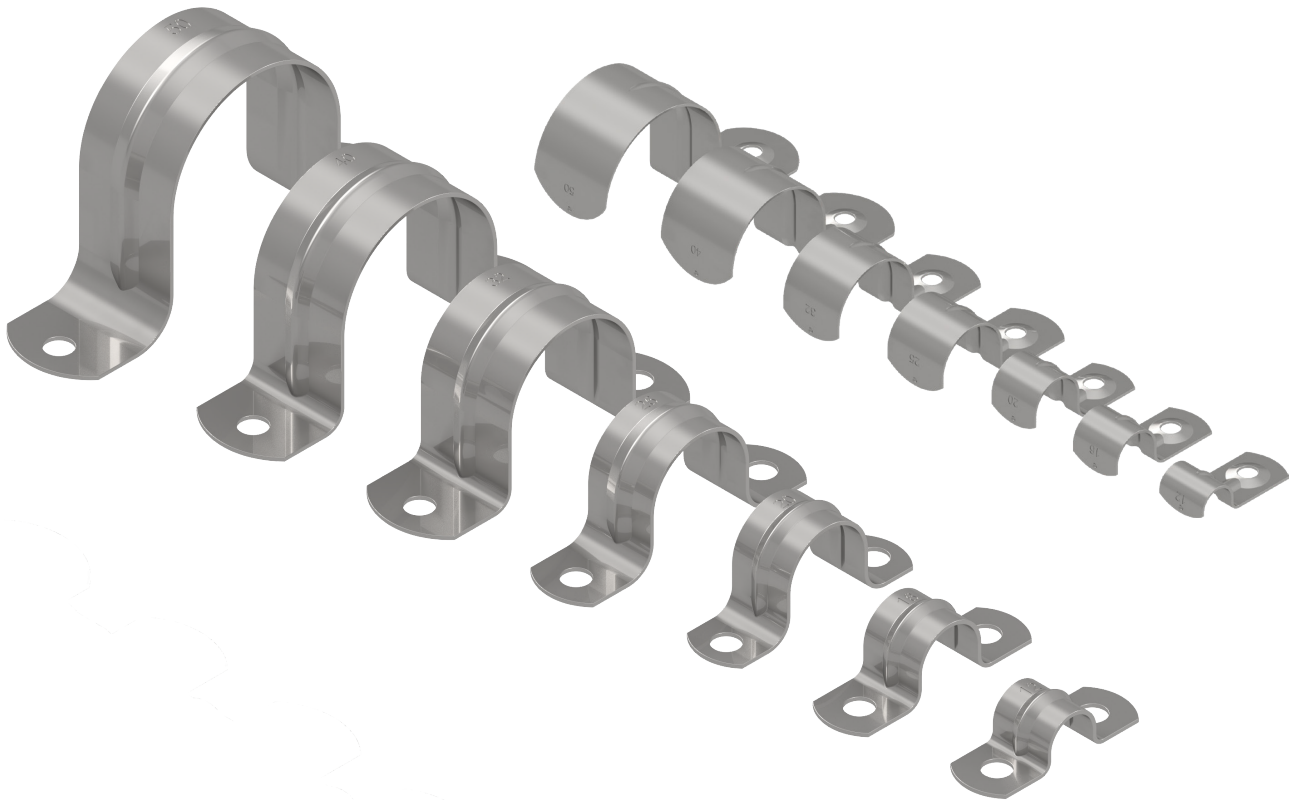

CONDUIT SADDLES - 316 STAINLESS STEEL RANGE

Code	Description	Strip Width	Packing	MOQ	Ctn	Mounting Hole Centres
HS-M12/SS	316 S/Steel Saddle - 12mm - Half	19mm	100	100	2000	-
HS-M16/SS	316 S/Steel Saddle - 16mm - Half	20mm	100	100	1600	-
HS-M20/SS	316 S/Steel Saddle - 20mm - Half	20mm	100	100	1200	-
HS-M25/SS	316 S/Steel Saddle - 25mm - Half	24mm	100	100	800	-
HS-M32/SS	316 S/Steel Saddle - 32mm - Half	25mm	60	60	720	-
HS-M40/SS	316 S/Steel Saddle - 40mm - Half	32mm	45	45	540	-
HS-M50/SS	316 S/Steel Saddle - 50mm - Half	40mm	20	20	360	-
FS-M12/SS	316 S/Steel Saddle - 12mm - Full	16mm	100	100	2000	27mm
FS-M16/SS	316 S/Steel Saddle - 16mm - Full	17mm	100	100	1600	35mm
FS-M20/SS	316 S/Steel Saddle - 20mm - Full	17mm	100	100	1200	40mm
FS-M25/SS	316 S/Steel Saddle - 25mm - Full	20mm	100	100	800	50.9mm
FS-M32/SS	316 S/Steel Saddle - 32mm - Full	24mm	60	60	720	55mm
FS-M40/SS	316 S/Steel Saddle - 40mm - Full	24mm	45	45	540	71mm
FS-M50/SS	316 S/Steel Saddle - 50mm - Full	23mm	20	20	360	73.2mm