

CONDUIT SADDLES - ZINC-PLATED


FEATURES & BENEFITS

- Zinc plated for finish and additional edge protection
- Strength rib for stronger rigidity
- Comprehensive range

SPECIFICATIONS

Material: Galvanised strip steel
Finish: Zinc-plated
Fixing hole Ø: 6.5mm
Material thickness: Full saddle - 0.8mm
Half saddle - 1.2mm

ZINC-PLATED

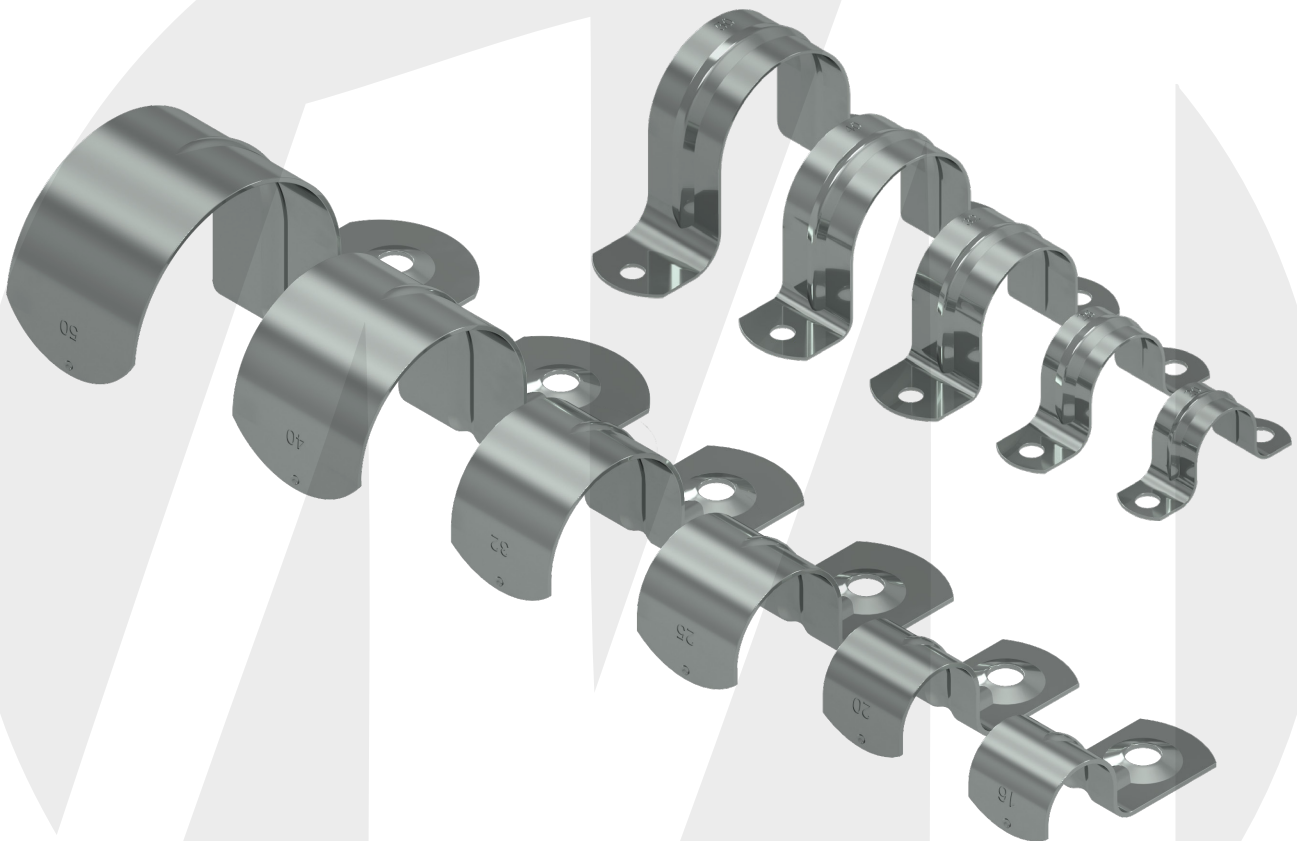

CONDUIT SADDLES - ZINC-PLATED RANGE

Code	Description	Strip Width	Packing	MOQ	Ctn
HS-M16/ZP	Zinc-Plated Saddle - 16mm - Half	20mm	100	100	800
HS-M20/ZP	Zinc-Plated Saddle - 20mm - Half	20mm	100	100	1200
HS-M25/ZP	Zinc-Plated Saddle - 25mm - Half	24mm	100	100	800
HS-M32/ZP	Zinc-Plated Saddle - 32mm - Half	25mm	60	60	720
HS-M40/ZP	Zinc-Plated Saddle - 40mm - Half	32mm	45	45	360
HS-M50/ZP	Zinc-Plated Saddle - 50mm - Half	40mm	20	20	160
FS-M20/ZP	Zinc-Plated Saddle - 20mm - Full	17mm	100	100	1200
FS-M25/ZP	Zinc-Plated Saddle - 25mm - Full	20mm	100	100	800
FS-M32/ZP	Zinc-Plated Saddle - 32mm - Full	24mm	60	60	720
FS-M40/ZP	Zinc-Plated Saddle - 40mm - Full	24mm	45	45	540
FS-M50/ZP	Zinc-Plated Saddle - 50mm - Full	23mm	20	20	360