


AK1, AT1 & DUAL RANGE EXPULSION FUSELINKS

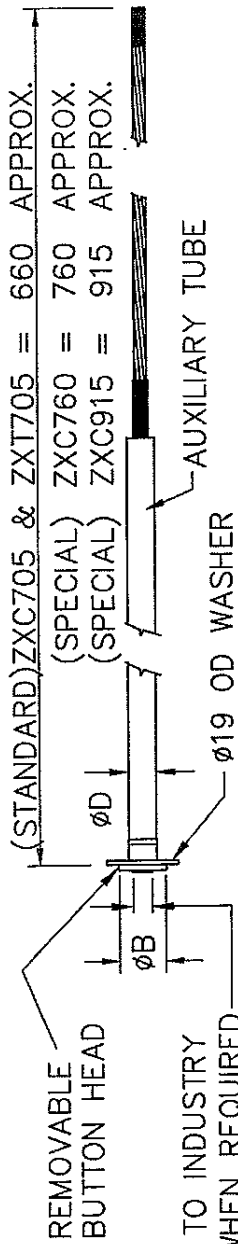


1/4" UNF-28 TO SUIT ATTACHMENT TO INDUSTRY
STANDARD ARC SHORTENING RODS WHEN REQUIRED

AMPS	TYPE K SPEED CHARACTERISTIC	AUX. TUBE (BUTTON HEAD)	φ D	φ B	φ 19 WASHER
1	Part No. ZXC705-01BK37		7.9	12.7	YES
1.6	ZXC705-1.6BK37		7.9	12.7	YES
2	ZXC705-02BK37		7.9	12.7	YES
3	ZXC705-03BK37		7.9	12.7	YES
5 & 6	ZXC705-06BK37		7.9	12.7	YES
8	ZXC705-08BK37		7.9	12.7	YES
10	ZXC705-10BK37		7.9	12.7	YES
12	ZXC705-12BK37		7.9	12.7	YES
16	ZXC705-16BK37		7.9	12.7	YES
20	ZXC705-20BK37		7.9	12.7	YES
25	ZXC705-25BK37		7.9	12.7	YES
31	ZXC705-31BK37		7.9	12.7	YES
40	ZXC705-40BK37		7.9	12.7	YES
50	ZXC705-50BK37		7.9	12.7	YES
63	ZXC705-63BK37		10.9	19	NO
80	ZXC705-80BK37		10.9	19	NO
100	ZXC705-100BK37		10.9	19	NO

三

AT1:

AMPS	TYPE T SPEED CHARACTERISTIC	AUX. TUBE/BUTTON HEAD			ø 19 WASHER
		Part No.	ø D	ø B	
1	 SAME AS K SPEED	ZXT705-08B137	7.9	12.7	YES
1.6		ZXT705-08B137	7.9	12.7	YES
2		ZXT705-10B137	7.9	12.7	YES
3		ZXT705-12B137	7.9	12.7	YES
5 & 6		ZXT705-16B137	7.9	12.7	YES
8		ZXT705-20B137	7.9	12.7	YES
10		ZXT705-25B137	7.9	12.7	YES
12		ZXT705-31B137	7.9	12.7	YES
16		ZXT705-40B137	7.9	12.7	YES
20		ZXT705-50B137	7.9	12.7	YES
25		ZXT705-63B137	10.9	19	NO
31		ZXT705-80B137	10.9	19	NO
40		ZXT705-100B137	10.9	19	NO
50		ZXT705-125B137	10.9	19	NO
63		ZXT705-160B137	10.9	19	NO
80		ZXT705-200B137	10.9	19	NO
100		ZXT705-250B137	10.9	19	NO

certificate of Conformance to AS 1033.1 – 1990 Class AK1

12 kV & 24 kV in NGK STANGER C type Dropouts.

also suitable for use up to 36 kV in Single & Dual Vented Dropout Units.

For Dual Range 'SURGEPROOF' ratings with AK1 performance use:

3/10 ('C') Dual Range 'SURGEPROOF' instead of standard 3K Fuselink.

/20 (F) " " " "

[illegible]

Selection Guide (L567) & Time-Current Data (K "SPEED" = L568, T "SPEED" = L569, SURGEPROOF = L570) available on request.

Flexible Head Adaptors: Part No. 69231/1 (for 1--31 Amp Fuselinks)

or 69231/2 (for 40–100 Amp Fuselinks)

must be used with older style Top-Latched Dropout Units.

For 760 or 915mm length refer ZXC760 or ZXC915 SERIES

For fuselinks to use in ALM HXO dropouts refer :

type FLEE (12kV), FLFE (24/36kV), FLGE (72.5kV).

AMPS	DUAL RANGE "SURGEPROOF"	AUX. TUBE BUTTON HEAD	Ø19 WASHER
		Ø D	Ø B
3/10	(°C) ZXC705-310BK37	7.9	12.7
6/20	(°F) ZXC705-620BK37	7.9	12.7
10/30	(°F) ZXC705-1030BK37	7.9	12.7

DUAL:

Type K & T ratings also comply with EEI-NEMA

This document is the property of MCGraw-HILL PAPER and must not be copied or reproduced without written permission, nor disclosed to any third party.

 Quality Endorsed Company	DROPOUT EXPULSION FUSELINKS SERIES				NGK STANGER NGK STANGER Pty. Ltd. AC.N. 004 225 012 MELBOURNE AUSTRALIA				
	ZXC705, ZXT705, ZXC760, ZXC915 CLASS A : AS1033.1								
	DRAWN <i>Val</i>		CHECKED <i>Val</i>		APPD <i>St</i>		DATE 17-8-98		
	PROJECTION 		ORIGIN		SIZE A4		DRAWING NO. ZXC5A15		
AS/NZS ISO 9002:1994 Licence Number 358 Standards Australia								ISSUE 10	