
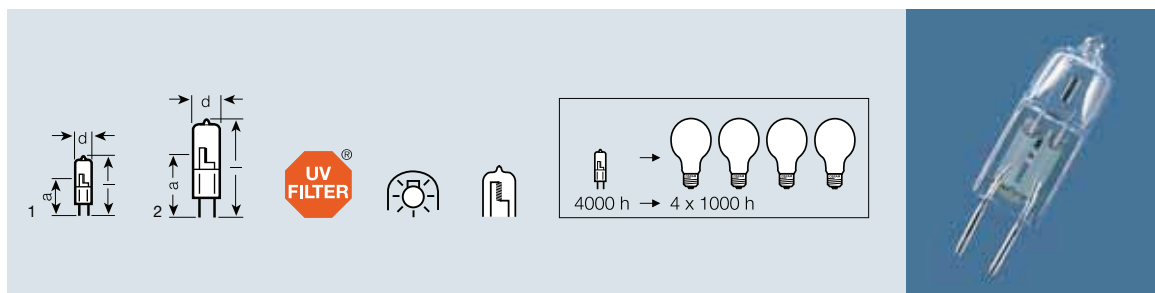


HALOSTAR STARLITE® 6-12V


HALOSTAR STANDARD 12V



Product reference	Product number	W	V	lm	t[h]		d max. [mm]	l max. [mm]	a [mm]		No.
HALOSTAR STARLITE® 6-12V SERIES											
64405 S ¹⁾	4050300 335032	5	12	60	4000	G4	10	33	22	40	1
64410 S	4050300 335131	10	6	110	4000	G4	10	33	22	40	1
64415 S	4050300 335087	10	12	130	4000	G4	10	33	22	40	1
64425 S	4050300 335162	20	12	300	4000	G4	10	33	22	40	1
64427 S	4050300 328171	20	12	300	4000	GY6.35	12	44	30	40	2
64432 S	4050300 017426	35	12	600	4000	GY6.35	12	44	30	40	2
64440 S	4050300 328201	50	12	910	4000	GY6.35	12	44	30	40	2
64450 S	4050300 490151	75	12	1450	4000	GY6.35	12	44	30	40	2
64458 S	4050300 490182	90	12	1800	4000	GY6.35	12	44	30	40	2

HALOSTAR STARLITE® lamps may be used in free-burning applications without a shield on the luminaire. They are made from UV-reducing quartz and comply with the strictest UV protection thresholds (to IEC 60432).

- Long average life of 4000 hours
- Axial filament for optimum directional light
- Special pins for corrosion protection
- Approved for use in open luminaires to IEC 60598-1
- Dimmable
- Color temperature of 3000 K

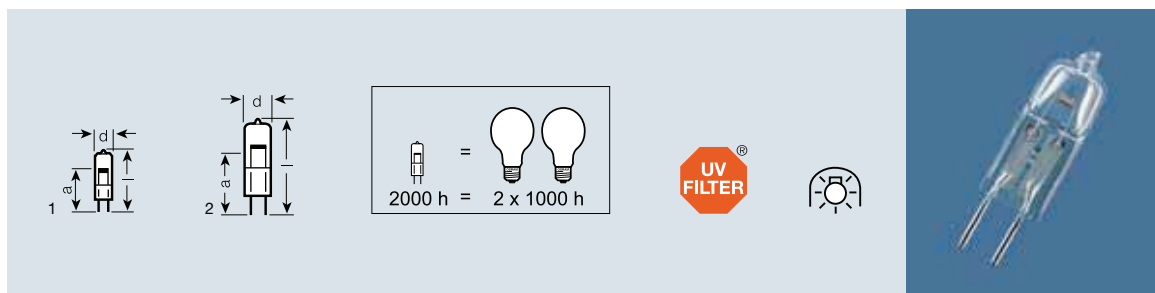

Product reference	Product number	W	V	lm	t[h]		d max. [mm]	l max. [mm]	a [mm]		No.
HALOSTAR® STANDARD 12V											
64415 STD UVS	4050300 010717	10	12	140	2000	G4	10	33	22	40	1
64425 STD UVS	4050300 003924	20	12	320	2000	G4	10	33	22	40	1
64425 STD UVS TWIN	4008321 201836	20	12	320	2000	G4	10	33	22	10x BLI2	1
64440 STD UVS	4050300 324432	50	12	910	2000	GY6.35	12	44	30	40	2
64440 STD UVS TWIN	4008321 202161	50	12	910	2000	GY6.35	12	44	30	10x BLI2	2

Free-burning halogen lamps such as HALOSTAR® STANDARD, have given lighting designers new freedom thanks to their brilliant, highly focused and decorative light.

- Average life 2000 hours
- Approved for use in open luminaires to IEC 60598-1
- UV-FILTER
- Dimmable
- Color temperature of 3000 K