

Product Information

Head Office Sydney, 1st November 2011
 From: John Pongrac – Product Manager

LED GU10 Downlight Kit

<u>EAN</u>	<u>Reference</u>
4008321027962	LED D/L SC 10W/832 230V GU10 10X1
4008321002976	LED D/L WH 10W/830 230V GU10 10X1

Includes

- Adjustable WHITE or SATIN CHROME diecast gimble with twist lock lamp replacement and rubber padded mounting springs for easy installation.
- Integrated 240V terminal block with cable clamp
- 240V - GU10 lamp holder.
- High performance PARATHOM® PRO PAR16 50 ADVANCED Rear Mount 10W WW 240V GU10 lamp.

Lamp Performance

- Rated Power = 10W
- Voltage = 240V
- Base = GU10
- Beam Spread = 36°
- Lumen Output = 350lm
- Luminous intensity = 950cd
- CRI = 80
- CCT = Warm White 3000K±100K
- Operating temperature -20°C to +40°C
- Power Factor (min) = 0.9
- Ave. Lifetime (L70) = 25,000h
- Switching Cycles (30s on – 30s off) = 100,000
- Mercury content = 0.0mg
- Starting time (max) = 0.0s




Features

- Dimmable Professional LED lamp replacing a main voltage Halogen 50W (GU10) in downlight
- Efficient generation of white light – very low energy consumption
- Extremely long life
- Equipped with high-efficiency OSRAM High-Power LEDs
- No UV and no IR in the light beam
- Shockproof and vibration-proof
- Dimmable on leading edge dimmers
- The average lifetime of LED lamp is defined as the number of hours when 50% of a large group of identical lamps below 70% of its initial luminous flux (L70B50, IEC60969). The lifetime is estimated at room temperature (25°C), free air burning, base up burning position and at rated voltage.
- 5 year warranty

Applications

Mounting of fixture in a recessed ceiling,

- 90mm mounting hole cutout size
- To achieve full lifetime ensure good heat exchange for the electronic components.
- Ensure that there is no thermal insulation within 200mm of fixture.

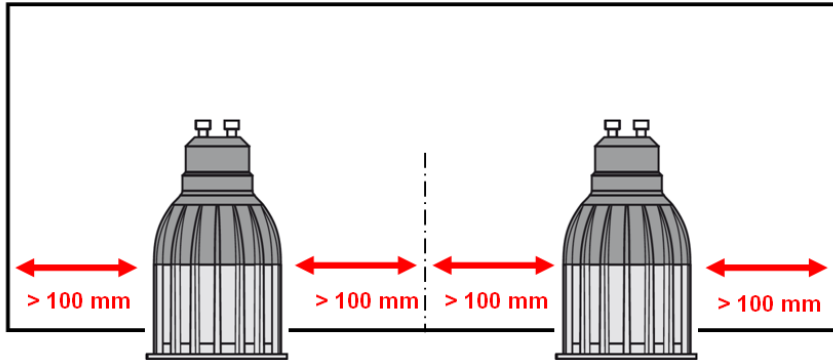

Mechanical

- Dimension (mm) Ø105 x 120 (H), Ø50 at light source
- Mounting Holes Ø 90mm
- Allowable mounting surface thickness 2~20mm
- Tiling Angle = 35°
- Weight = 400 g

Brochure

- Colour brochure is available.



Packaging

