

PRODUCT DATASHEET

HQI-T 70 W/NDL UVS

POWERSTAR HQI-T G12 | Metal halide lamps with quartz technology for enclosed luminaires



AREAS OF APPLICATION

- Shopping arcades
- Exhibition halls and trade fairs
- Factories and workshops
- Pedestrian zones, public squares
- Buildings, monuments, bridges
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- High efficiency
- Good to excellent color rendering
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

PRODUCT FEATURES

- POWERSTAR quartz technology
- Light colors: warm white (WDL), neutral white (NDL)
- Average lifetime: 9,000 h



TECHNICAL DATA

Electrical data

Rated wattage	73.00 W
Lamp current	0.9 A
PFC capacitor at 50 Hz	12 µF ¹⁾
Nominal wattage	70.00 W
Nominal voltage	100 V
Ignition voltage	3.6 / 5.0 kVp ²⁾


¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

²⁾ Minimum / Maximum

Photometrical data

Rated lamp efficacy (standard condition)	77 lm/W
Rated luminous flux	5800 lm
Color temperature	4200 K
Light color	842
Rated LLMF at 2,000 h	0.80
Rated LLMF at 4,000 h	0.74
Rated LLMF at 6,000 h	0.68
Rated LLMF at 8,000 h	0.60
UV protection	Yes
Luminous flux	5800 lm
Color rendering index Ra	80

Dimensions & weight

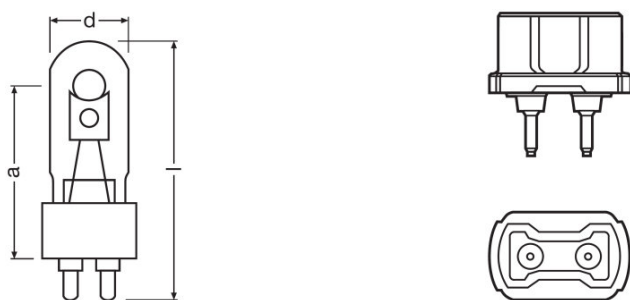

Diameter	25.0 mm
Length	84.0 mm
Light center length (LCL)	56.0 mm
Product weight	30.00 g

Temperatures & operating conditions

Maximum permitted outer bulb temperature	500 °C
--	--------

Lifespan

Rated lamp survival factor at 2,000 h	0.87
Rated lamp survival factor at 4,000 h	0.85
Rated lamp survival factor at 6,000 h	0.80
Rated lamp survival factor at 8,000 h	0.60
Lifespan B50	9000 h

Additional product data

Base (standard designation)	G12
Design / version	Clear
Mercury content	14.7 mg

Capabilities

Dimmable	No
Burning position	Any ¹⁾
Enclosed luminaire required	Yes

¹⁾ Burning position: In horizontal burning position of lamp, base pins must be positioned in such a way that they form a horizontal plane

Certificates & standards

Energy efficiency class	A
Energy consumption	81 kWh/1000h

Country-specific categorizations

ILCOS	MT/UB-70/842-H/E/SL-G12-25/84
-------	-------------------------------

SYSTEM GUARANTEE

When operated with OSRAM POWERTRONIC control gear, an extended system guarantee is granted for these lamps

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321974327	Folding carton box 1	111 mm x 42 mm x 42 mm	40.00 g	0.20 dm ³
4008321974334	Shipping carton box 12	180 mm x 127 mm x 140 mm	567.00 g	3.20 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.ledvance.com/system-guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

POWERSTAR HQI-T G12 | Metal halide lamps with quartz technology for enclosed luminaires