


EA1601A, EA1601B, EA1601C, EA1601D, EA1601E

Cable Gland – 1 hole, 2 hole, 3 hole, 4 hole, 5 hole

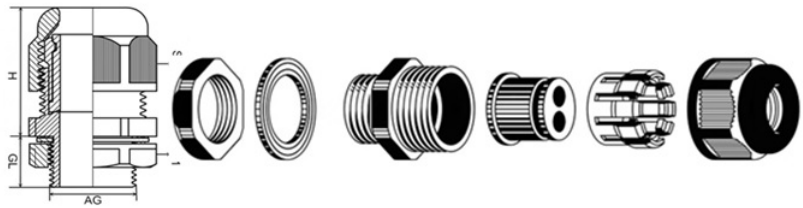

Thread	Part No	Cable Range	AG	GL	H	SW1/SW2	Quantity	Quantity	Package	N.W/G.W
		mm	mm	mm	mm	mm	Per Carton	Per Bag	Carton	KGS
M25 x 1.5	M25-H2-6	2-6	25	15	34	33/33	800	50	46.5*37.5*35	28/30
M25 x 1.5	M25-H3-6	3-6	25	15	34	33/33	800	50	46.5*37.5*35	27/29
M25 x 1.5	M25-H4-6	4-6	25	15	34	33/33	800	50	46.5*37.5*35	27/29
M25 x 1.5	M25-H5-6	5-6	25	15	34	33/33	800	50	46.5*37.5*35	26/28

Specifications

Material	UL approved Nylon PA66
Fix Claw	UL approved Nylon PA66
Hermetic Seal	EPDM Rubber
Washer(O Ring)	EPDM Rubber
Fire Proof Degree	UL94V-2
Protection Degree	IP68
Working Temperature	-40°C to 100°C
Color	Black(RAL9005), Grey(RAL7035), other colors customised

Please Note:

Please consult with your Electrician/Engineer to ensure suitability for the intended application and installation.

PGK Distribution takes every precaution to ensure the information in this publication is correct but accepts no liability of any kind and reserves the right to change any detail in this catalogue without notification.

PGK Distribution

VIC Main Office

8 Mohr St Tullamarine, Vic 3043

T: 1300 PGK SOL