




ECO LED Panel Gen2

- One box solution - 3-in-1 Colour Select option to choose the right colour temperature for the application
- Easy to install - Remote constant current driver with 1.2 meter flex and plug and light-weight design
- Quality opal diffuser - delivering high quality and even light distribution
- Splash-proof with IP40 rating (front of panel)
- Office-compliant option available in >UGR19 version
- Accessories available for flexible installation including surface mount frame, plaster master frame and suspension kit

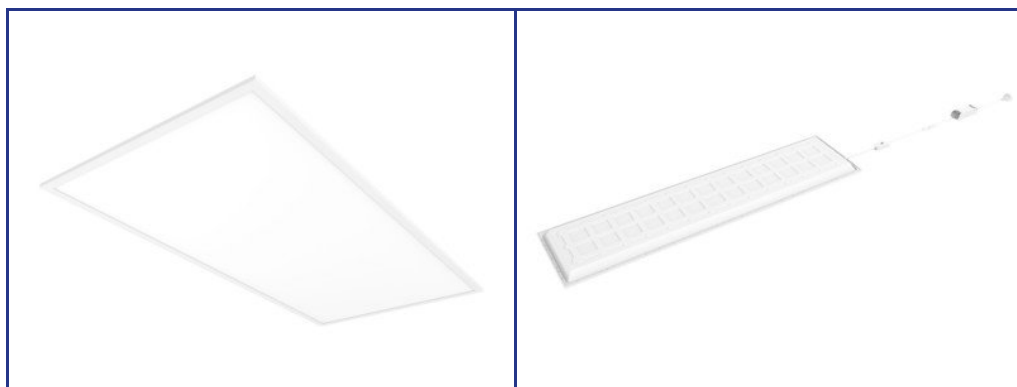

3
 YEAR
 WARRANTY*


NON
 DIMMABLE


GENERAL SPECIFICATION

DIMMABLE	RATED AVERAGE LIFE	FINISH	COLOUR	BEAM DISTRIBUTION	VOLTAGE	LAMP STYLE
No	50000Hrs	Powdercoated	White	Symmetric	240V	LED
HEAT SINK MATERIAL	LAMP TYPE	OPERATING TEMPERATURE				
Metal	LED (PCBA)	0 to 40°C				


UNIQUE SPECIFICATION

ITEM CODE	DESCRIPTION	WATTAGE	LUMEN OUTPUT	COLOUR TEMPERATURE	CRI
ECOPL063CSEG2	ECO PANEL 14W 600X300 COLOUR SELECT BACKLIT	14W	1400Lm	4000K/ 5000K/6000K	80
ECOPL066CSEG2	ECO PANEL 27W 600X600 COLOUR SELECT BACKLIT	27W	2800Lm	4000K/ 5000K/6000K	80
ECOPL1234EG2	ECO PANEL 27W 1200X300 4000K SINGLE COLOUR BACKLIT	27W	2900Lm	4000K	80
ECOPL1234UG19	ECO PANEL 34W 1200X300 4000K SINGLE COLOUR BACKLIT UGR19	34W	3200Lm	4000K	80
ECOPL123CSEG2	ECO PANEL 27W 1200X300 COLOUR SELECT BACKLIT	27W	2800Lm	4000K/ 5000K/6000K	80

ECO LED Panel Gen2

ITEM CODE	IP RATING	CUTOUT (MM)	WEIGHT	BEAM ANGLE	DIMENSIONS H x W x L (MM)	CIRCUIT WATTAGE
ECOPL063CSEG2	IP40	295	1.01kg	110°	30 x 295 x 595	14W
ECOPL066CSEG2	IP40	595	1.93kg	110°	30 x 595 x 595	27W
ECOPL1234EG2	IP44	295	1.93kg	110°	30 x 295 x 1195	27W
ECOPL1234UG19	IP40	295	2.32kg	90°	30 x 295 x 1195	34W
ECOPL123CSEG2	IP40	295	1.93kg	110°	30 x 295 x 1195	27W

PRODUCT IMAGES



ECO LED Panel Gen2

LINE DRAWINGS

