

Vandalux LED Emergency Lumen Select Gen2

The high output LED Emergency vandal proof batten has die-cast LM6 aluminum body with the ability to select preferred lumen output/wattage within one fitting

- Pressure die-cast marine grade aluminum body with a powder coated paint finish
- Multiple wattages/Lumen outputs in 1 fitting
- Two sizes available 4FT (26W,2812lm; 35W,3837lm; 42W,4576lm; 57W,6153lm; 68W,7121lm) and 2FT (20W,2114lm; 23W,2510lm; 31W,3351lm; 36W,3861lm)



LUMEN SELECT™



80

CRI



IP66

Ingress
Protection
Rating



5SDCM

MacAdam
Steps



0 - 50°C

Operating
Temperature



DALI

Dimming



60,000hrs
(L70/B50)

Lifetime



5 Years

Warranty

CODE	SYSTEM POWER	EXIT LUMEN	LM/W	CCT	DIMENSIONS	WEIGHT	LINE CURRENT
VXOLS2D4M2	32W	3351lm	110lm/W	4000K	L700 x W138 x H114mm	4kg	0.16A
	20W	2114lm	129lm/W				
	23W	2510lm	109lm/W				
	36W	3861lm	118lm/W				
VXOLS2D4M2K	32W	3500lm	110lm/W	4000K	L700 x W138 x H114mm	4kg	0.16A
	20W	2114lm	129lm/W				
	23W	2510lm	127lm/W				
	36W	3861lm	118lm/W				
VXOLS4D4M2	57W	6153lm	108lm/W	4000K	L1310 x W138 x H114mm	8kg	0.25A
	26W	2812lm	123lm/W				
	35W	3837lm	121lm/W				
	42W	4576lm	119lm/W				
	68W	7121lm	111lm/W				
VXOLS4D4M2K	55W	6153lm	108lm/W	4000K	L1310 x W138 x H114mm	8kg	0.25A
	57W	6153lm	114lm/W				
	26W	2812lm	123lm/W				
	35W	3837lm	121lm/W				
	42W	4576lm	119lm/W				
	68W	7121lm	111lm/W				

CLASSIFICATION	EMERGENCY MODE WATTAGE	BATTERY	BATTERY CHARGE	BATTERY VOLTAGE	BATTERY CAPACITY	TESTING SYSTEM
C0/C180: D50 & C90/C270: D32	3W	LiFePO4	2hr	3V	3200mA	Self Test and Dali

AS/NZS 2293.1:2018 Classification Table


Vandalux 600mm Emergency C0/C180: D50 & C90/C270: D32			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	16.5	16.5
3.3	18.1	17.6	18.1
3.6	19.8	16.5	19.8
4	21.8	18	21.8
4.5	22.5	18.5	22.5
5	23.1	19.4	23.1
6	24.1	20.4	24.1
7	24.9	22.1	24.9
8	25.6	23.5	25.6

Vandalux 1200mm Emergency C0/C180: D50 & C90/C270: D25			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	15.7	16.5
3.3	18.1	16.1	18.1
3.6	19.8	16.5	19.8
4	21.8	17.3	21.8
4.5	22.5	18.3	22.5
5	23.1	19.1	23.1
6	24.1	20.7	24.1
7	24.9	22	24.9
8	25.4	23	25.4


VXOLS2D4M2

VXOLS4D4M2

Line Drawings

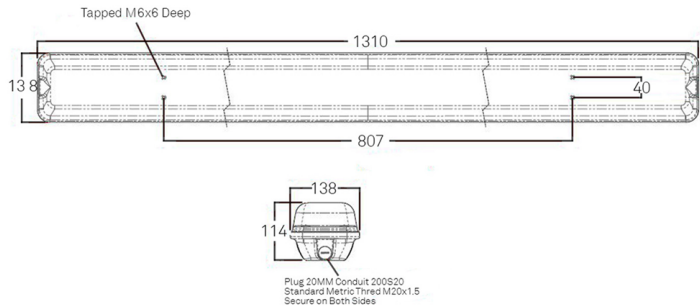

VXOLS4D4M2

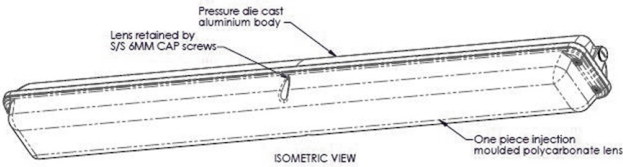

VXOLS4D4M2




VXOLS2D4M2

Product Images



VXOLS2D4M2, VXOLS4D4M2

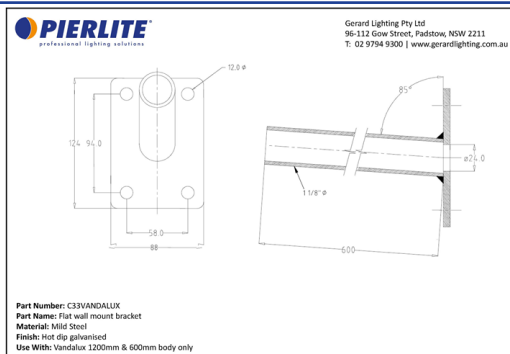

C33VANDALUX